PRELIMINARY SPEC

5mm ROUND LED LAMP

Part Number: L-9294SEC-J3 Hyper Red

Features


- •High luminous white emission
- •Low power consumption.
- •General purpose leads.
- •Reliable and rugged.
- •Long life solid state reliability.

•RoHS compliant.

Description

The Hyper Red device is based on light emitting diode chip made from AlGaInP.

Package Dimensions

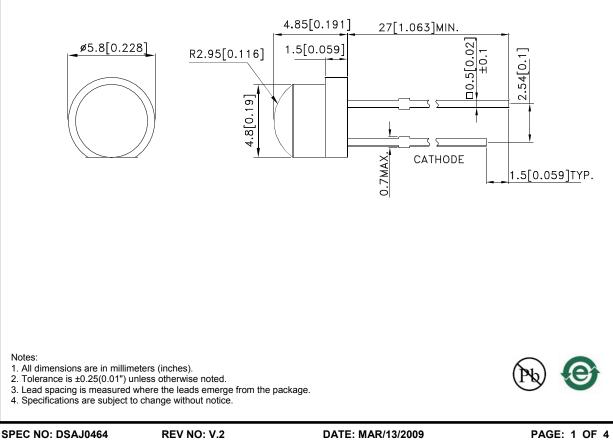

APPROVED: WYNEC

CHECKED: Allen Liu

DATE: MAR/13/2009 DRAWN: Y.F.Lu PAGE: 1 OF 4 ERP: 1101025073

Selection Guide										
Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]					
			Min.	Тур.	201/2					
L-9294SEC-J3	Hyper Red (AlGaInP)	WATER CLEAR	650	1600	130°					

Notes:

θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Hyper Red	640		nm	I⊧=20mA
λD [1]	Dominant Wavelength	Hyper Red	625		nm	I⊧=20mA
Δλ1/2	Spectral Line Half-width	Hyper Red	25		nm	I⊧=20mA
С	Capacitance	Hyper Red	27		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Hyper Red	2.2	2.8	V	I⊧=20mA
lr	Reverse Current	Hyper Red		10	uA	VR = 5V

Notes: 1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at TA=25°C

Parameter	Hyper Red	Units		
Power dissipation	84	mW		
DC Forward Current	30	mA		
Peak Forward Current [1]	150	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			

Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.
3. 5mm below package base.

