

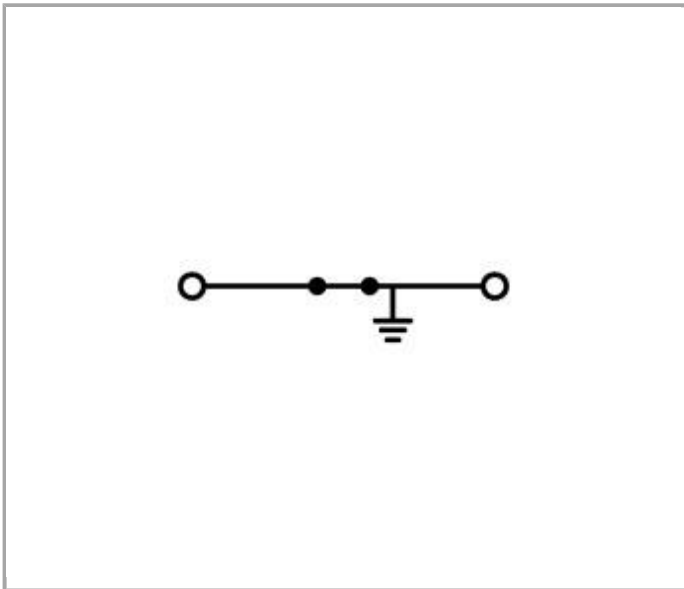


Data sheet | Item number: 2116-5207

TOPJOB®S ground terminal block with Lever and Push-button; rail mount; 2-conductor; 10 mm wide; green-yellow

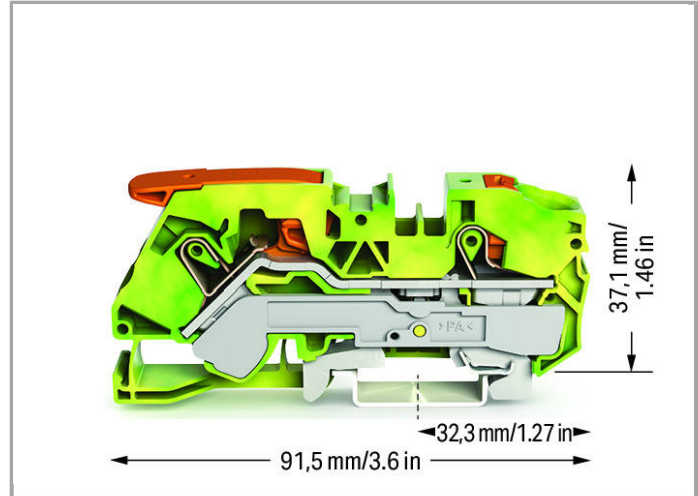

[www.wago.com/2116-5207](http://www.wago.com/2116-5207)

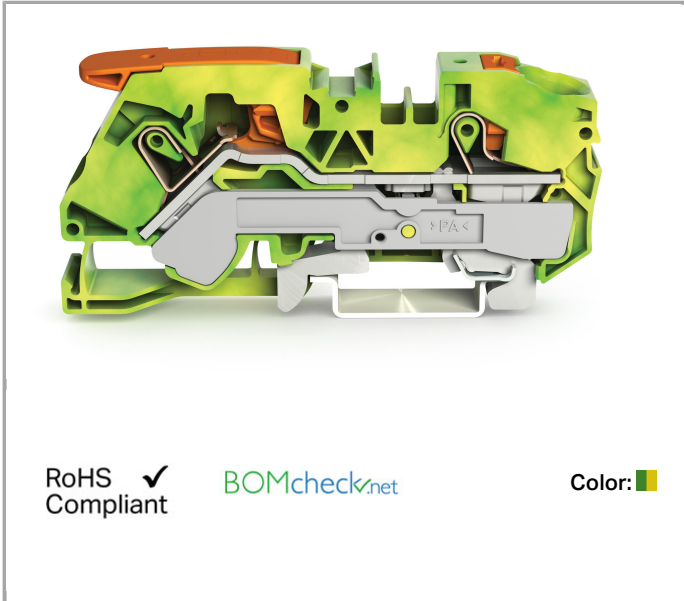

Data

Connection data

Connection technology	Push-in CAGE CLAMP®
Actuation type	Push-in Lever
Connectable conductor materials	Copper
Nominal cross section	16 mm <sup>2</sup>



Solid conductor	0.5 ... 16 mm <sup>2</sup> / 20 ... 6 AWG
Solid conductor, push-in termination	2.5 ... 16 mm <sup>2</sup> / 14 ... 6 AWG
Fine-stranded conductor	0.5 ... 25 mm <sup>2</sup> / 20 ... 4 AWG
Fine-stranded conductor with ferrule, push-in termination, from	2.5 mm <sup>2</sup> / 14 AWG
Strip length	18 ... 20 mm / 0.71 ... 0.79 Inch
Actuation type 2	Push-in Push-button Operating tool
Number of levels	1
Total number of connection points	2
Total number of potentials	1
Type of wiring	Front-entry wiring

### Geometrical Data

Width	12 mm / 0.472 inch
Height from upper-edge of DIN-35 rail	37.1 mm / 1.461 inch
Depth	91.5 mm / 3.602 inch

### Mechanical data

Design	horizontal
Type of mounting	DIN-35 rail
Marking level	Center/side marking

### Material Data


Color	green-yellow
Insulating material	Polyamide 66 (PA 66)
Weight	40.159 g

### Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4055143754453

### Approvals / Certificates

#### Country specific Approvals

Logo	Approval	Certificate name
	CCA DEKRA Certification B.V.	NTR NL 7675
	CSA	70175104



DEKRA Certification B.V.



KEMA/KEUR  
DEKRA Certification B.V.

71-103140

UL-Approvals

Logo

Approval

Certificate name



cURus  
Underwriters Laboratories Inc.

E45172

Downloads  
Documentation

Bid Text

2116-5207	15.8.2018	DOCX 14.9 kB	Download
-----------	-----------	-----------------	----------

Subject to changes.