




A

B

C

D

E

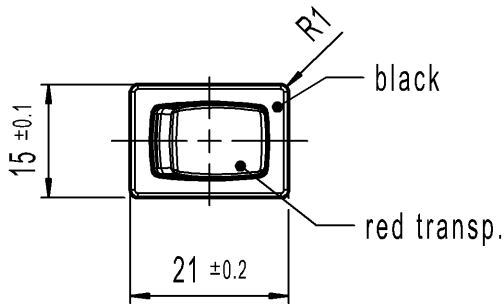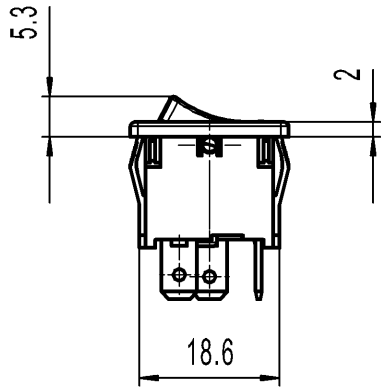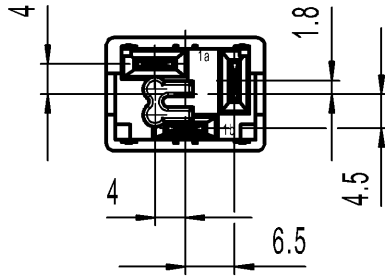


Marking



1890.



24V 6A



Code of manufacture: place/year/month

recommended cut-out for snap-in fixing (edge opposite to snap-in direction)


wall thickness	length of cut-out	width of cut-out
0.75 to 1.25	19.2-0.1	12.9+0.1
1.25 to 2	19.4-0.1	12.9+0.1
2 to 3	19.8-0.1	12.9+0.1

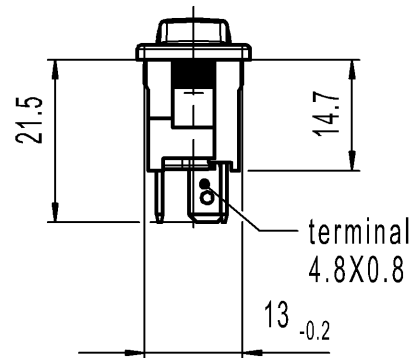

SPST

LED with Rv for 24V-----

Rv = 2.2KΩ ±20%



-	-	-	1890.1104-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location 	Angle ± 2 °	Sheet 01 Format DIN A4 Projection Scale 1:1 All dimensions are in millimetres System NX V1899 Replacement of Zg.gl.Nr.v.06.06.1995	
	Length		
	Radii		
	Edge tolerance		
b	141238	2023-01-23	MOHITEN
a	23763	1996-01-17	HS
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
Ident. K		Document number 18901104	Index b
Appliance Switch			
 MARQUARDT			