

R&S®HFH2-Z6E ACTIVE ROD ANTENNA

8.3 kHz to 30 MHz

Broadband active rod antenna for measuring electrical field components in EMI test setups



The R&S®HFH2-Z6E active rod antenna measures the electrical field strength in the LF, MF and HF range. It can be used for EMI measurements in line with various standards (i.e. CISPR, MIL, FCC, ANSI, ETSI).

Individual calibration in line with CISPR/ANSI standards available.

It is characterized by an almost frequency-independent antenna factor and very high sensitivity.


In strong field environments, an attenuator can be activated to reduce distortion. An integrated RF detector with a threshold circuit reports overload of the antenna.

The antenna is supplied via a coaxial cable using the optional R&S®IN600 bias unit.

Key facts

- ▶ Wide frequency range
- ▶ High sensitivity
- ▶ Wide dynamic range
- ▶ Compact design
- ▶ Integrated overload warning
- ▶ R&S®IN600 bias unit for power supply via coaxial cable available
- ▶ No batteries needed
- ▶ Individual calibration certificate supplied with antenna
- ▶ Virtually constant antenna factor



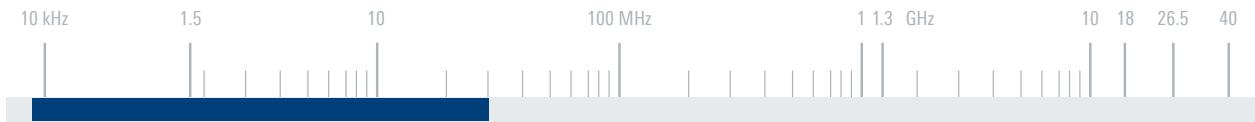

Specifications

Frequency range	8.3 kHz to 30 MHz	
Polarization	linear/vertical	
Nominal impedance	50 Ω	
VSWR	< 1.6	
RF connector	N female	
Antenna factor in		
Normal mode	8.3 kHz to 20 kHz	10 dB(1/m) ± 2 dB
	> 20 kHz to 30 MHz	10 dB(1/m) ± 1.5 dB
Attenuation mode	8.3 kHz to 20 kHz	20 dB(1/m) ± 2 dB
	> 20 kHz to 30 MHz	20 dB(1/m) ± 1.5 dB
Lower limit field strength in normal mode		
	8.3 kHz to 1 MHz	see diagram
	> 1 MHz to 30 MHz	< -40 dB(µV/m/Hz) (meas.)
Upper limit field strength	normal mode	typ. 125 dB(µV/m)
	attenuation mode	typ. 135 dB(µV/m)
Destructive field strength	8.3 kHz to 30 MHz	> 50 V/m
	> 30 MHz to 2 GHz	> 10 V/m
MTBF		> 100000 h
Power supply (via coaxial cable)		+24 V DC -3 V/+1 V (max. 150 mA)
Operating temperature range		+5°C to +40°C
Dimensions	base (W × L × H)	approx. 600 mm × 600 mm × 100 mm (24 in × 24 in × 4 in)
	rod height	approx. 1000 mm (39 in)/1040 mm (41 in)
Weight		approx. 6.5 kg (14 lb)

Ordering information

Type	Order No.
Active rod antenna	4110.1006.02
Recommended extras	
Calibration adapter	4110.1570.02
Bias unit	4094.3004.13
Wooden tripod	0837.2310.02
Rod antenna stand	5611.5035.02

Lower limit field strength level (for SNR = 1) in normal mode (meas.)

