



Product Specification¹ (Preliminary)

Working Frequency	850~950MHz
Gain	1.5 dBi Max
VSWR	2 max
Polarization	Linear
Azimuth	Omni-directional
Impedance	50Ω
Operating Temperature	-55~125 °C
Termination	Ni/Sn (Environmentally-Friendly Leadless)
Resistance to soldering heat	260°C, 10 sec.

A photograph of a small, square, blue antenna component. The component has a silver solder pad on its top surface. It is placed next to a ruler for scale, showing it is approximately 1 cm wide. The background is a light blue surface.


 *Special Environmental Concerns- Green Products Design: The foil making process is using environmentally friendly aqueous solvent technology. Termination is lead free and packing materials can be re-cycled*

¹ All the technical data and information contained herein are subject to change without prior notice


R&D	Print date 02/04/26										Preliminary use only											
	Multilayer Ceramic Antenna (LP Mode) for 850~950MHz										4311 119 00087										Oct. 24, 01	
																					Nov. 6, 01	
																					Jan. 7, 02	
Grant/Cliff.		2002-01-07				Page 1/7		sheet 190-1				A4										
spec.doc	PHYCOMP Ltd.																					

APPLICATION

Suggested Layout (60*20 mm ground plane)

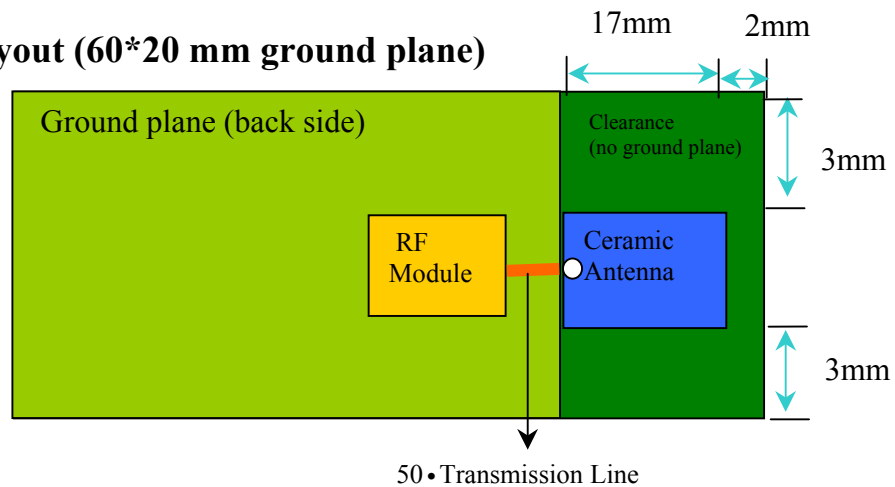

Solder Land Pattern for Antenna

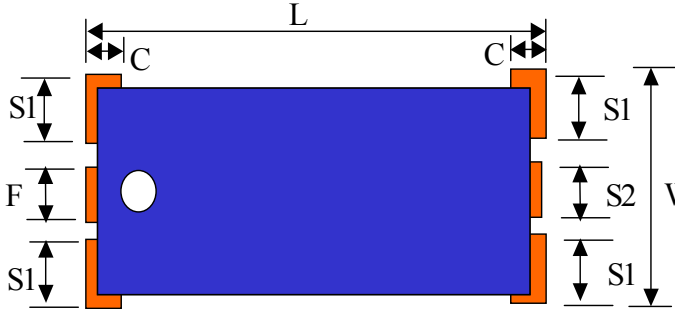
Figure	Dimensions		Remark
	L	17.00 ± 0.10 mm	Feed pad
W	14.40 ± 0.10 mm		
F	1.00 ± 0.10 mm		
C	0.90 ± 0.10 mm	Mount pad	
S1	1.40 ± 0.10 mm		
S2	1.00 ± 0.10 mm		Mount pad

R&D	Print date 02/04/26				Preliminary use only				
	Multilayer Ceramic Antenna (LP Mode) for 850~950MHz				4311 119 00087			Oct. 24, 01	
								Nov. 6, 01	
								Jan. 7, 02	
Grant/Cliff.		2002-01-07		Page 2/7	sheet 190-2			A4	
spec.doc	PHYCOMP Ltd.								


MECHANICAL DATA

Figure	Dimension	Port
	L $16.5 \pm 0.5 \text{ mm}$	-
	W $14.0 \pm 0.5 \text{ mm}$	-
	T $0.9 \pm 0.2 \text{ mm}$	-
	F $0.9 \pm 0.25 \text{ mm}$	Feed termination
	C $0.5 \pm 0.3 \text{ mm}$	-
	S1 $1.25 \pm 0.35 \text{ mm}$	Solder termination
	S2 $0.9 \pm 0.25 \text{ mm}$	Solder termination

Radiation Pattern Polar plot

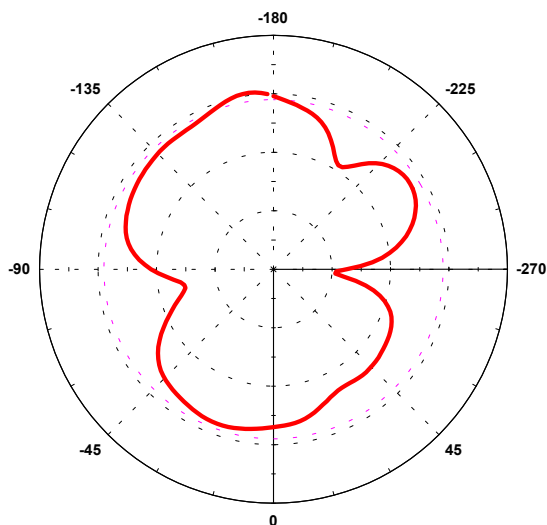


E Plane

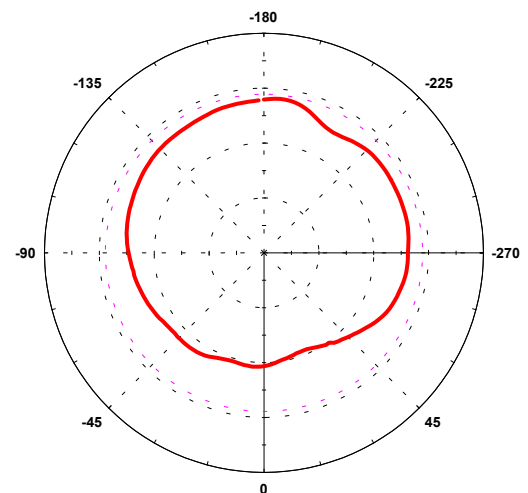


H Plane

R&D	Print date 02/04/26				Preliminary use only				
	Multilayer Ceramic Antenna (LP Mode) for 850~950MHz				4311 119 00087			Oct. 24, 01	
								Nov. 6, 01 Jan. 7, 02	
Grant/Cliff.		2002-01-07		Page 3/7	sheet 190-3			A4	
spec.doc	PHYCOMP Ltd.								

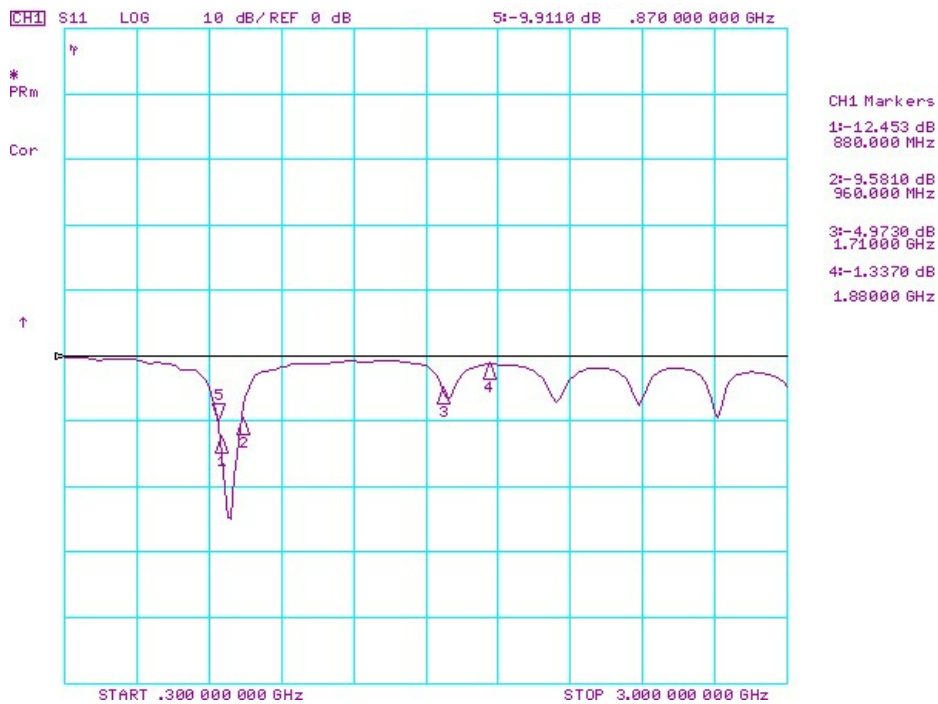

DEMO Board

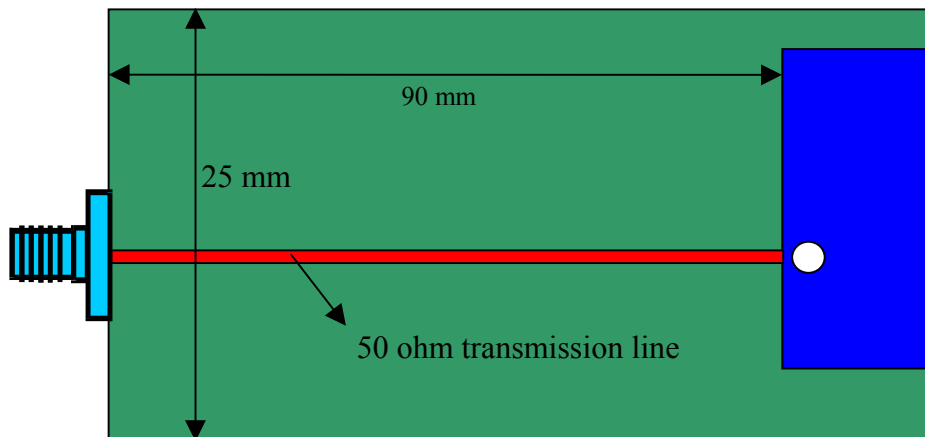

R&D	Print date 02/04/26										Preliminary use only				
	Multilayer Ceramic Antenna (LP Mode) for 850~950MHz						4311 119 00087					Oct. 24, 01			
												Nov. 6, 01			
												Jan. 7, 02			
Grant/Cliff.		2002-01-07		Page 4/7	sheet 190-4				A4						
spec.doc	PHYCOMP Ltd.														

RELIABILITY DATA (Reference to IEC Specification)

IEC 384-10/ CECC 32 100 CLAUSE	IEC 6006868-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4		Mounting	The antenna can be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	No visible damage
4.5		Visual inspection and dimension check	Any applicable method using $\times 10$ magnification	In accordance with specification (no chip off 3 mm)
4.6.1		Antenna	Central Frequency at 20 °C	Standard test board on page 4
4.8		Adhesion	A force of 5 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	No visible damage
4.9		Bond strength of plating on end face	Mounted in accordance with CECC 32 100, paragraph 4.4	No visible damage
			Conditions: bending 0.25 mm at a rate of 1mm/s, radius jig. 340 mm, 1 mm warp on FR4 board of 90 mm length	No visible damage
4.10	Tb	Resistance to soldering heat	260 ± 5 °C for 10 ± 0.5 s in a static solder bath	The terminations shall be well tinned after recovery and Central Freq. Change $\pm 6\%$

R&D	Print date 02/04/26				Preliminary use only			
	Multilayer Ceramic Antenna (LP Mode) for 850~950MHz				4311 119 00087			Oct. 24, 01
								Nov. 6, 01 Jan. 7, 02
Grant/Cliff.		2002-01-07		Page 5/7	sheet 190-5			A4
spec.doc	PHYCOMP Ltd.							

The antennas may be ordered by using the 12 NC ordering code. These code numbers can be determined by the following rules:

A. Working Frequency
087 = 850~950MHz

The antennas may be ordered by using the 16-digit clear text ordering code. These code numbers can be determined by the following rules:

R&D	Print date 02/04/26										Preliminary use only											
	Multilayer Ceramic Antenna (LP Mode) for 850~950MHz										4311 119 00087										Oct. 24, 01	
																					Nov. 6, 01	
																					Jan. 7, 02	
Grant/Cliff.		2002-01-07				Page 7/7		sheet 190-7				A4										
spec.doc	PHYCOMP Ltd.																					