


Data sheet | Item number: 890-304

Mounting carrier; 4-pole; for sockets and plugs; Plastic; gray

www.wago.com/890-304

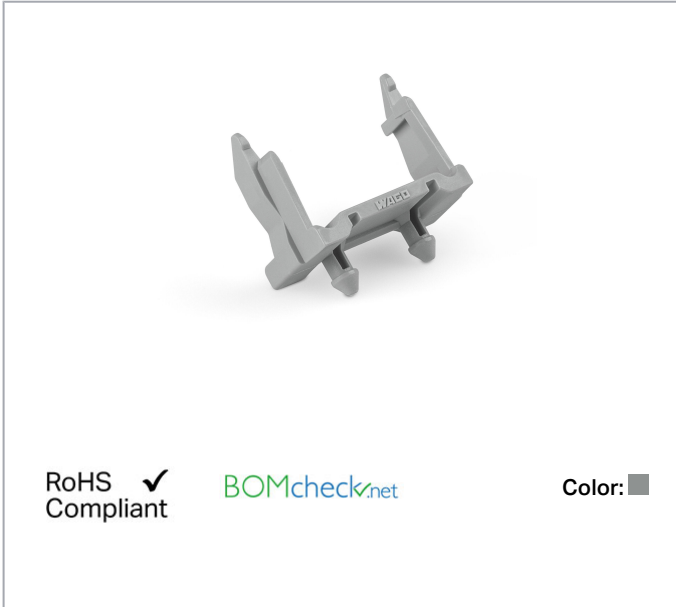

Data

Connection data

Pole No. 4

Mechanical data

Suitable for socket and plug

Material data

Color	gray
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.02 MJ
Weight	0.7 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Note on continuous operating temperature

Insulating parts for temperatures $\leq 105\text{ }^{\circ}\text{C}$

Commercial data

Product Group	20 (WINSTA)
Packaging type	BOX
Country of origin	DE
GTIN	4055143838566
Customs tariff number	39269097900

Downloads

Documentation

Bid Text

890-304 doc - Datei	16. 3. 2015	doc 24.1 kB	Download
890-304 X81 - Datei	19. 2. 2019	xml 2.7 kB	Download

CAD/CAE-Data

CAD data

2D/3D Models 890-304	URL	Download
----------------------	-----	----------

CAE data

ZUKEN Portal 890-304	URL	Download
----------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 890-304 Mounting carrier; 4-pole; for sockets and plugs; Plastic; gray	URL	Download
--	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!

Data sheet | Item number: 890-304

www.wago.com/890-304



Product family

WINSTA® MINI

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.