

Data sheet

769-123

**2-CONDUCTOR FEMALE PLUG TO BE FIXED ON RECEPTACLE TERMINAL BLOCKS OR MALE CONNECTORS
COMMONING POSSIBILITY WITH ADJACENT JUMPERS AND STAGGERED JUMPERS WITH CODIG FINGERS CAGE CLAMP CONNECTION**



Technical data

Package size 25 pieces.

pole count	3
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Voltage UL	300/600 V
Voltage CSA	300 V
Current UL	10/5 A
Current CSA	10 A
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Weight	14.92 g
Color	grey
Wiring type	Front-entry
No. of connection Points	6
No. of potentials	3
Height	45.2 mm
Height	1.78 in
Width	15 mm
Width	0.591 in
Depth	35.9 mm

Data sheet**769-123****2-CONDUCTOR FEMALE PLUG TO BE FIXED ON RECEPTACLE TERMINAL
BLOCKS OR MALE CONNECTORS
COMMONING POSSIBILITY WITH ADJACENT JUMPERS AND STAGGERED
JUMPERS WITH CODIG FINGERS CAGE CLAMP CONNECTION**

Depth	1.413 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

Data sheet

769-123

**2-CONDUCTOR FEMALE PLUG TO BE FIXED ON RECEPTACLE TERMINAL
BLOCKS OR MALE CONNECTORS
COMMONING POSSIBILITY WITH ADJACENT JUMPERS AND STAGGERED
JUMPERS WITH CODIG FINGERS CAGE CLAMP CONNECTION**

Approval	Voltage	Current	Approval number	Notes
BBJ	500	16	B/12/695/03	
CCA	500	32	NL5642	
CSA	300	10	154112-1466219	
GL	500	16	17295-00HH	
KEMA	500	32	2077750.01	
LR	500	16	91/20112(E1)	
RMR	500	16	99.00007.250	
UL	600	20	E45171	
UL	300/600	10/5	E45172	

Data sheet

769-123


2-CONDUCTOR FEMALE PLUG TO BE FIXED ON RECEPTACLE TERMINAL BLOCKS OR MALE CONNECTORS COMMONING POSSIBILITY WITH ADJACENT JUMPERS AND STAGGERED JUMPERS WITH CODIG FINGERS CAGE CLAMP CONNECTION

Accessories	Item number
1-CONDUCTOR FEMALE PLUG TO BE FIXED ON RECEPTACLE TERMINAL BLOCKS OR MALE CONNECTORS	769-101
ADJACENT JUMPER NOMINAL CURRENT 24 A	280-402
CARRIER FOR SPARE ADJACENT JUMPERS SUITABLE FOR ADJACENT JUMPER SERIES 279-284, BANANENSTECKER SERIES 215	209-100
CODING PIN FOR CODING OF FEMALE PLUGS	769-435
Individual wire jumpers	individual jumper
INSULATION STOP 0.08 - 0.2 MM ²	769-470
INSULATION STOP 0.25 - 0.5 MM ²	769-471
INSULATION STOP 0.25 - 0.5 MM ²	769-472
LOCKING LEVER CAN BE SNAPPED ON 1=CONDUCTOR FEMALE PLUGS	769-430
LOCKING LEVER CAN BE SNAPPED ON 1=CONDUCTOR FEMALE PLUGS	769-431
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-002
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-005
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-006
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-007
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-012
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-017
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-023
MINIATURE WSB QUICK MARKING SYSTEM PLAIN	248-501/000-024
Open individual wire jumpers ends	individual jumper open end
OPERATING LEVER LOOSE	769-434
PROTECTIVE WARNING MARKER WITH HIGH VOLTAGE SYMBOL, BLACK	280-415
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
STAGGERED JUMPER FROM 1 TO 2	780-452
STAGGERED JUMPER FROM 1 TO 3	780-453
STAGGERED JUMPER FROM 1 TO 4	780-454
STAGGERED JUMPER FROM 1 TO 5	780-455
STAGGERED JUMPER FROM 1 TO 6	780-456
STAGGERED JUMPER FROM 1 TO 7	780-457
STAGGERED JUMPER FROM 1 TO 8	780-458
STRAIN RELIEF PLATE SNAP-ON TYPE FOR 1-CONDUCTOR FEMALE PLUGS	769-411
TEST PLUG 2 MM / 0.079 IN WIDE	210-136
TEST PLUG 2.3 MM / 0.091 IN WIDE	210-137

Data sheet

769-123

**2-CONDUCTOR FEMALE PLUG TO BE FIXED ON RECEPTACLE TERMINAL BLOCKS OR MALE CONNECTORS
COMMONING POSSIBILITY WITH ADJACENT JUMPERS AND STAGGERED
JUMPERS WITH CODIG FINGERS CAGE CLAMP CONNECTION**

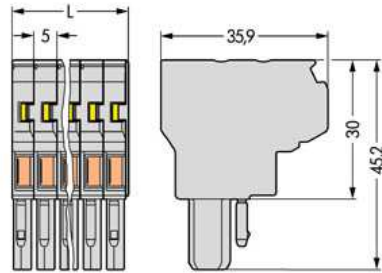

Data sheet

769-123

**2-CONDUCTOR FEMALE PLUG TO BE FIXED ON RECEPTACLE TERMINAL
BLOCKS OR MALE CONNECTORS
COMMONING POSSIBILITY WITH ADJACENT JUMPERS AND STAGGERED
JUMPERS WITH CODIG FINGERS CAGE CLAMP CONNECTION**

L = No.of poles x module width