



HHR-210AA/HT Cylindrical AA size (HR15/51)

Dimensions (with tube) (mm)

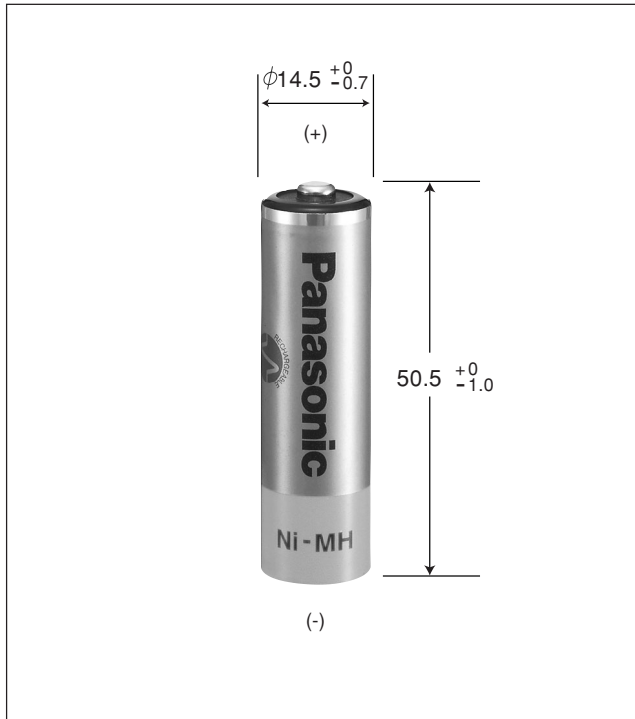

Typical charge characteristics

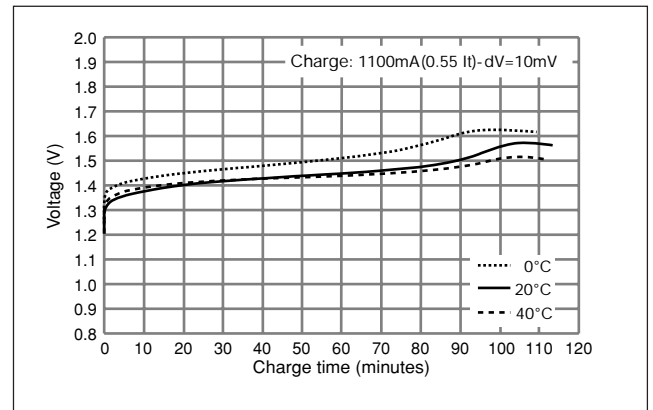

Specifications



Diameter	14.5+0 / -0.7mm
Height	50.5+0 / -1.0mm
Approximate Weight	29g

Nominal Voltage		1.2V	
Discharge Capacity	Average ^{*1}	2,080mAh	
	Rated (min.)	2,000mAh	
Approx. Internal impedance at 1000Hz at charged state.		20m Ω	
Charge	Standard	200mA X 16hrs.	
	Rapid	1,200mA X 2hrs.	
Ambient Temperature	Charge	Standard	0°C to 45°C
		Rapid	0°C to 40°C
Discharge		-10°C to 65°C	
Storage	<1 year	-20°C to 35°C	
	<3 months	-20°C to 45°C	
	<1 month	-20°C to 55°C	

*1 After charging at 0.1It for 16 hours, discharging at 0.2It.
 *2 For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

Typical discharge characteristics

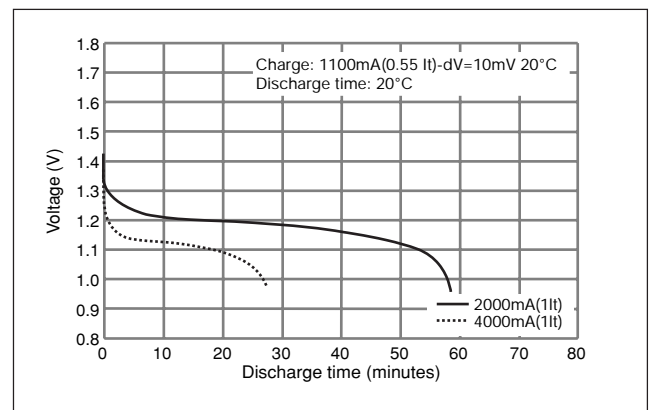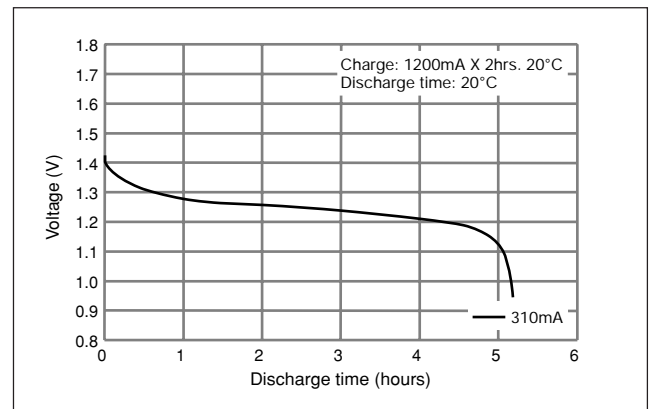

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.