


PCC 4/ 2-ST-7,62 - PCB connector



1840191

<https://www.phoenixcontact.com/sk/products/1840191>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PCB connector, nominal cross section: 4 mm², color: green, nominal current: 20 A, rated voltage (III/2): 1000 V, contact connection type: Socket, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: PCC 4/..-ST, pitch: 7.62 mm, connection method: Crimp connection, conductor/PCB connection direction: 0 °, locking clip: - Locking clip, plug-in system: COMBICON PC 4, locking: without, mounting: without, type of packaging: packed in cardboard, Corresponding female crimp contacts with current [A] and conductor cross section range [mm²] data: 13,5A/STG-MTN 0,5-1,0 (3190438); 13,5A/STG-MTN 0,5-1,0 BA (3190629); 20A/STG-MTN 1,5-2,5 (3190506); 20A/STG-MTN 1,5-2,5 BA (3190632). BA = Taped contacts

Your advantages

- Inexpensive connection of large quantities of preassembled conductors
- Small component size for applications where space is at a premium

Commercial data

Item number	1840191
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	AAD
Product key	AADCAA
Catalog page	Page 514 (C-1-2013)
GTIN	4017918102272
Weight per piece (including packing)	2.304 g
Weight per piece (excluding packing)	1.966 g
Customs tariff number	85366990
Country of origin	DE

PCC 4/ 2-ST-7,62 - PCB connector



1840191

<https://www.phoenixcontact.com/sk/products/1840191>

Technical data

Product properties

Product type	PCB connector
Product family	PCC 4/..-ST
Product line	COMBICON Connectors L
Type	Standard
Number of positions	2
Pitch	7.62 mm
Number of connections	2
Number of rows	1
Number of potentials	2
Mounting flange	without

Data management status

Article revision	01
------------------	----

Electrical properties

Nominal current I_N	20 A
Nominal voltage U_N	1000 V
Rated voltage (III/3)	400 V
Rated surge voltage (III/3)	8 kV
Rated voltage (III/2)	1000 V
Rated surge voltage (III/2)	8 kV
Rated voltage (II/2)	1000 V
Rated surge voltage (II/2)	8 kV

Connection data

Connection technology

Type	Standard
Connector system	COMBICON PC 4
Nominal cross section	4 mm ²
Contact connection type	Socket

Interlock

Locking type	without
Mounting flange	without

Conductor connection

Connection method	Crimp connection
Conductor/PCB connection direction	0 °
Conductor cross section flexible	0.5 mm ² ... 2.5 mm ²
Conductor cross section AWG	20 ... 14

PCC 4/ 2-ST-7,62 - PCB connector

1840191


<https://www.phoenixcontact.com/sk/products/1840191>

Material specifications

Material data - housing

Color (Housing)	green (6021)
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

Dimensions

Dimensional drawing	
Pitch	7.62 mm
Width [w]	15.24 mm
Height [h]	17.2 mm
Length [l]	28.7 mm

Notes

Notes on operation	In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load.
--------------------	--

Electrical tests

Air clearances and creepage distances |


Insulating material group	I
Rated insulation voltage (III/3)	400 V
Rated surge voltage (III/3)	8 kV
Rated insulation voltage (III/2)	1000 V
Rated surge voltage (III/2)	8 kV
Rated insulation voltage (II/2)	1000 V
Rated surge voltage (II/2)	8 kV

Packaging specifications

Type of packaging	packed in cardboard
-------------------	---------------------


Drawings

Diagram

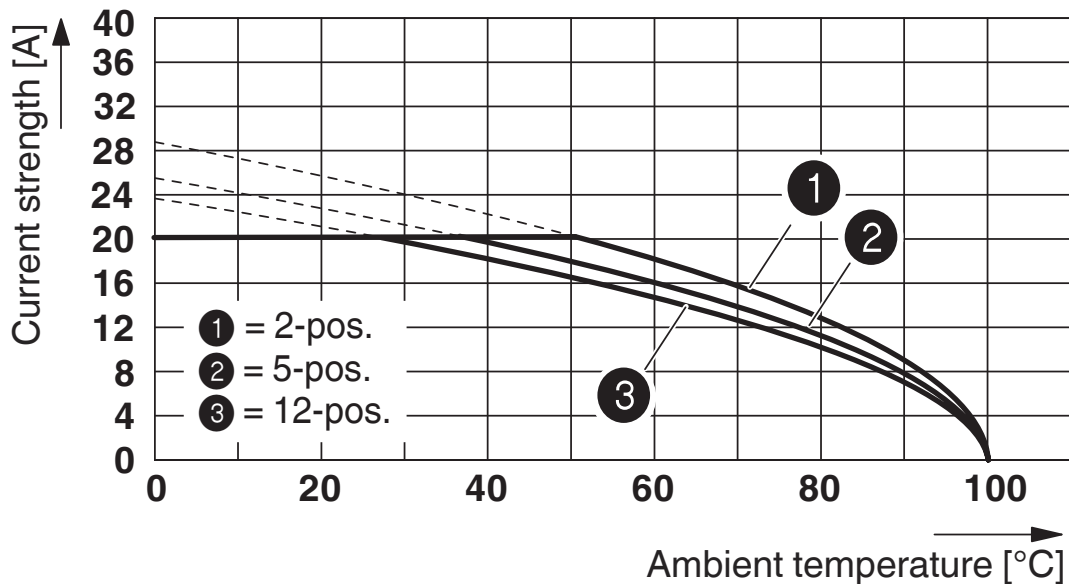

Derating curve for: PCC 4/...-ST-7,62 with PC 4/...-G-7,62

Diagram

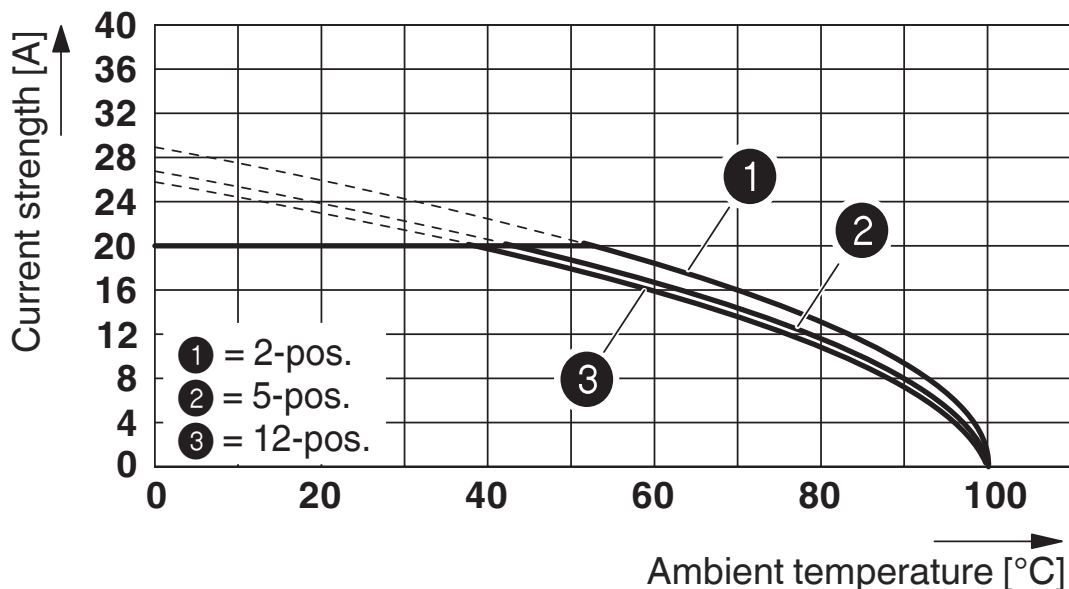

Derating curve for: PCC 4/...-ST-7,62 with PCVK 4-7,62

PCC 4/ 2-ST-7,62 - PCB connector





1840191

<https://www.phoenixcontact.com/sk/products/1840191>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/sk/products/1840191>

 CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	10 A	20 - 14	-
Use group C	300 V	10 A	20 - 14	-

 cULus Recognized Approval ID: E60425-19920722				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	600 V	10 A	20 - 14	-
Use group C	600 V	10 A	20 - 14	-

PCC 4/ 2-ST-7,62 - PCB connector



1840191

<https://www.phoenixcontact.com/sk/products/1840191>

Classifications

ECLASS

ECLASS-11.0	27460202
ECLASS-12.0	27460202
ECLASS-13.0	27460202

ETIM

ETIM 9.0	EC002638
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

PCC 4/ 2-ST-7,62 - PCB connector



1840191

<https://www.phoenixcontact.com/sk/products/1840191>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

EF3.0 Climate Change

CO2e kg	0.037 kg CO2e
---------	---------------

PCC 4/ 2-ST-7,62 - PCB connector



1840191

<https://www.phoenixcontact.com/sk/products/1840191>

Accessories

CP-PC RD - Coding profile

1701967

<https://www.phoenixcontact.com/sk/products/1701967>

Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red




SK 7,62/3,8:FORTL.ZAHLEN - Marker card

0804549

<https://www.phoenixcontact.com/sk/products/0804549>

Marker card, white, labeled, horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: adhesive, for terminal block width: 7.62 mm, text field height: 3.8 mm, text field width: 7.62 mm



PCC 4/ 2-ST-7,62 - PCB connector

1840191

<https://www.phoenixcontact.com/sk/products/1840191>

STG-MTN 0,5-1,0 - Crimp contact

3190438

<https://www.phoenixcontact.com/sk/products/3190438>



Module socket contact, inserted in the PCC or HCC plug housing after crimping the conductor, for 0.5 mm² ... 1.0 mm² conductors

STG-MTN 0,5-1,0 BA - Crimp contact

3190629

<https://www.phoenixcontact.com/sk/products/3190629>



Module socket contact, inserted in the PCC or HCC plug housing after crimping the conductor, for 0.5 mm² ... 1.0 mm² conductors, ribbon contact

PCC 4/ 2-ST-7,62 - PCB connector

1840191

<https://www.phoenixcontact.com/sk/products/1840191>

STG-MTN 1,5-2,5 - Crimp contact

3190506

<https://www.phoenixcontact.com/sk/products/3190506>



Module socket contact, inserted in the PCC or HCC plug housing after crimping the conductor, for 1.5 mm² ... 2.5 mm² conductors

STG-MTN 1,5-2,5 BAND - Crimp contact

3190632

<https://www.phoenixcontact.com/sk/products/3190632>



Module socket contact, inserted in the PCC or HCC plug housing after crimping the conductor, for 1.5 mm² ... 2.5 mm² conductors, ribbon contact

PCC 4/ 2-ST-7,62 - PCB connector

1840191

<https://www.phoenixcontact.com/sk/products/1840191>



CRIMPFOX MT 2,5 - Crimping pliers

1204038

<https://www.phoenixcontact.com/sk/products/1204038>



Crimping pliers, for crimping conductors to the module female contacts STG-MTN, crimp range: 0.5-2.5 mm², AWG: 20-14

STG-EW - Contact removal tool

3190441

<https://www.phoenixcontact.com/sk/products/3190441>



Contact removal tool

PCC 4/ 2-ST-7,62 - PCB connector

1840191

<https://www.phoenixcontact.com/sk/products/1840191>

STZ 2-PCC 4-7,62 - Strain relief

1840214

<https://www.phoenixcontact.com/sk/products/1840214>



Strain relief, for the PCC 4/..-ST and 3-pos. ... 4-pos. MCC 1/..-STZ(F) connector, for snapping into the latching chambers, can be labeled with ZB 6

STZ 3-PCC 4-7,62 - Strain relief

1840227

<https://www.phoenixcontact.com/sk/products/1840227>



Strain relief, for the PCC 4/..-ST and 5-pos. ... 10-pos. MCC 1/..-STZ(F) connector, for snapping into the latching chambers, can be labeled with ZB 6

PCC 4/ 2-ST-7,62 - PCB connector

1840191

<https://www.phoenixcontact.com/sk/products/1840191>

STZ 5-PCC 4-7,62 GN - Strain relief

1842005

<https://www.phoenixcontact.com/sk/products/1842005>



Strain relief, for the PCC 4/...-ST and 11-pos. ... 15-pos. MCC 1/...-STZ(F) connector, for snapping into the latching chambers, can be labeled with ZB 6

STZ 8-PCC 4-7,62 - Strain relief

1840230

<https://www.phoenixcontact.com/sk/products/1840230>



Strain relief, for the PCC 4/...-ST and 16-pos. ... 20-pos. MCC 1/...-STZ(F) connector, for snapping into the latching chambers, can be labeled with ZB 6

PCC 4/ 2-ST-7,62 - PCB connector

1840191

<https://www.phoenixcontact.com/sk/products/1840191>

PCV 4/ 2-G-7,62 - PCB header

1804687

<https://www.phoenixcontact.com/sk/products/1804687>



PCB headers, nominal cross section: 4 mm², color: green, nominal current: 20 A, rated voltage (III/2): 630 V, contact surface: Sn, contact connection type: Pin, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: PCV 4/..-G, pitch: 7.62 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 5 mm, number of solder pins per potential: 2, plug-in system: COMBICON PC 4, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Mounting flange: Accessory Item No. 1827570

PC 4/ 2-G-7,62 - PCB header

1804797

<https://www.phoenixcontact.com/sk/products/1804797>



PCB headers, nominal cross section: 4 mm², color: green, nominal current: 20 A, rated voltage (III/2): 630 V, contact surface: Sn, contact connection type: Pin, number of potentials: 2, number of rows: 1, number of positions: 2, number of connections: 2, product range: PC 4/..-G, pitch: 7.62 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 5 mm, number of solder pins per potential: 2, plug-in system: COMBICON PC 4, Pin connector pattern alignment: Standard, locking: without, mounting: without, type of packaging: packed in cardboard, Mounting flange: Accessory Item No. 1827570

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT s.r.o.
Námestie Mateja Korvína 1
811 07 Bratislava
+421 2 3210 1470
obchod.sk@phoenixcontact.com