

Apacer

The Most **Reliable**
Storage For Industries



SDM5A 22P90D



SDM5A 22P90D

Overview

The SDM5A-M SATA DOM (SATA disk of module) series is available with a 22-pin connector that is oriented at 90 degrees or 180 degrees and is designed for a adopted in industrial, embedded, and commercial computers. Supporting SATA 6.0 Gb/s and read and write speeds up to 200 MB/s and 85MB/s respectively, the SDM5A-M DOM offers outstanding reliability based on flash vendor guaranteed wide-temp MLC chip in capacities of 8GB to 64GB and also can work at extended temperatures (-40°C~ 85°C) under harsh operating environment, particularly well-suited for applications such as POS, kiosk, gaming, digital signage, STB, low-cost NB surveillance systems and Thin client. The actual available memory on the device is less than what is listed on the package. This is due to small discrepancies in file formats and algorithms used by various operating systems. In addition, a portion of memory space is reserved for system files and data sectors for better performance.




Feature

- 22-pin SATA Standard Connector
- Global Wear-leveling and Block Management
- Built in ATA Secure Erase and S.M.A.R.T. Function
- Intelligent Power Failure Recovery
- TRIM Command Support
- MLC Extended Temperature Support

Specifications

Model	SDM5A 22P90D
Interface	SATA 3.0 (6Gb/s)
Connector	(7+15) pin male
NAND Flash Type	SLC
Capacity	1GB~32GB
External DRAM	No
Sustained Read Performance (MB/sec)	Up to 65
Sustained Write Performance (MB/sec)	Up to 105
ECC Engine	Built-in 40-bit per 1K bytes BCH ECC
Standard Operating Temperature (°C)	0 ~ + 70
Extended Operating Temperature (°C)	-40 ~ + 85
Storage Temperature (°C)	-40 ~ + 100
Thermal Sensor	Optional
Shock	Operation: 50G, 11ms Non-operation: 1500G, 0.5ms
Vibration	Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) "Non-operation: 4.02 Grms, 15 ~ 2000 Hz/sine (compliant with MIL-STD-810G)
Operating Voltage	5.0 V ± 5%
Power Consumption	Active mode: 260 mA & Idle mode: 70 mA
Dimension (L x W x H)	44 x 30 x 11 (mm)
MTBF (hours)	>2,000,000

Mechanical Specification

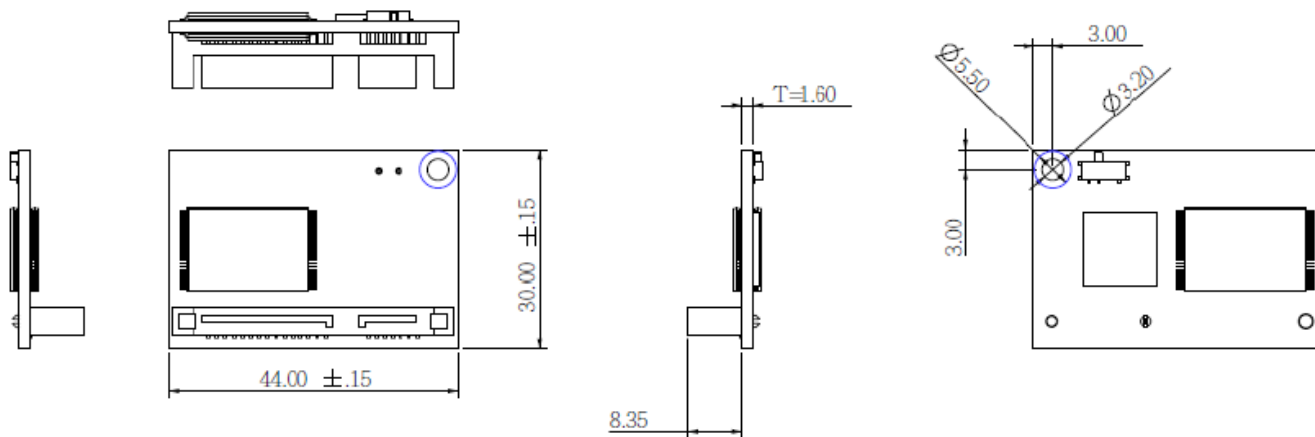

Unit: mm

Ordering Info

Operation Temp.	8GB	16GB	32GB	64GB
Standard Grade	APSDM008G12AN-CTM1	APSDM016G12AN-CTM1	APSDM032G12AN-CTM1	APSDM064G12AN-CTM1
Industrial Grade	APSDM008G12AN-CTM1W	APSDM016G12AN-CTM1W	APSDM032G12AN-CTM1W	APSDM064G12AN-CTM1W

Global Presence

Taiwan (Headquarters)
Apacer Technology Inc.
Tel: +886-2-2267-8000
Fax: +886-2-2267-2261

Europe
Apacer Technology B.V.
Tel: +31-40-267-0000
Fax: +31-40-290-0686

U.S.A.
Apacer Memory America, Inc.
Tel: +1-408-518-8699
Fax: 1-510-249-9551

China
Apacer Electronic(Shanghai)
Co., Ltd.
Tel: +86-21-6228-9939

Japan
Apacer Technology Corp.
Tel: +81-3-5419-2668
Fax: +81-3-5419-0018

India
Apacer Technologies Pvt. Ltd.
Tel: +91-80-41529061~3
Fax: +91-80-41700215