


Data sheet | Item number: 252-954

THT male header; Locking lever; Pin spacing 3.5 mm; 4-pole; gray

www.wago.com/252-954

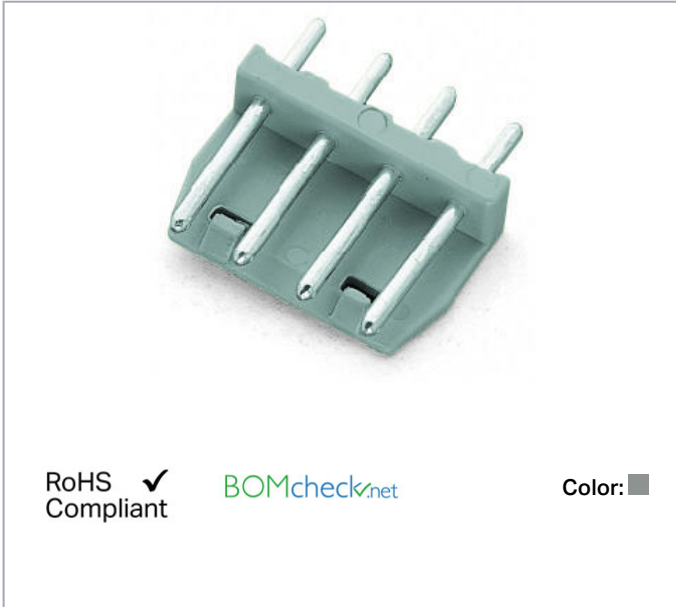

Data

Connection data

Pole No.	4
Number of levels	1

Physical data

Pin spacing	3.5 mm / 0.138 inch
Solder pin length	3.5 mm
Solder pin diameter	1 mm
Drilled hole diameter with tolerance	1.2 ^(+0.05) mm

Mechanical data

Suitable	with locking function
----------	-----------------------

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
------------------------------------	---------------------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Connector (connection type)	for PCB
Locking of plug-in connection	locking lever

PCB contact

PCB Contact	THT
-------------	-----

Material data

Color	gray
Weight	0.5 g

Commercial data

Product Group	4 (Printed Circuit)
Packaging type	BOX
Country of origin	CH
GTIN	4045454698188
Customs tariff number	85366990990

Counterpart



Item no.252-154

2-conductor female connector; for solder pin strip; push-button; 0.8 mm Ø; Pin spacing 3.5 mm; 4-pole; 0,50 mm²; gray

www.wago.com/252-154

Downloads

Documentation

Additional Information

Technical explanations	3. 4. 2019	pdf 2.0 MB	Download
------------------------	------------	---------------	----------

CAD/CAE-Data

PCB Design

Symbol and Footprint 252-954	URL	Download
------------------------------	-----	----------

CAX data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

Supported formats:

Subject to changes. Please also observe the further product documentation!



- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 252-954	URL	Download
THT male header; Locking lever; Pin spacing 3.5 mm; 4-pole; gray		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.