



Item no.: 282-698/281-449
 Product description: 2-CONDUCTOR FUSE TERMINAL BLOCK FORMINI-AUTOMOTIVE BLADE-TYPE FUSES WITH TESTING FACILITY 12 V WITH BLOWN FUSE INDICATION BY LED
 Power consumption LED: 4.8 mA

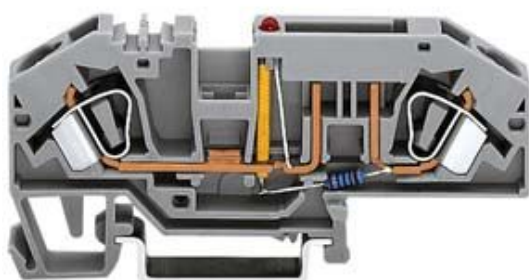

Produkt kann von Bild abweichen / product may differ

Packing unit 25 pieces

RoHS compliant

Product group	1 (Rail Mounted Terminal Blocks)
Power consumption LED	4.8 mA
Cross section [mm ²]	0.2 - 6 mm ²
Cross section [AWG]	24 - 10 AWG
Connection method	CAGE CLAMP® CONNECTION
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	25 A
Current intensity EN	30 A
Weight	18.15 g
Color	gray
Wiring type	Angled Type
No. of connection Points	2
No. of potentials	2
Height	33.5 mm
Height	1.32 in

Width	8 mm
Width	0.315 in
Depth	85 mm
Depth	3.35 in
Strip length from	12 mm



Strip length to	13 mm
Strip length	0.49 in
Safety information 1	The nominal voltage and nominal current are defined by the indicator lamp or the fuse.
Safety information 2	Blade-type fuses, please note touchproof protection from 42 V
Mounting	TS 35



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm ²]
282-698/281-449	CSA	154112-1505033	24	12	24-10
282-698/281-449	UR	E45172	24	30	24-10

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected