
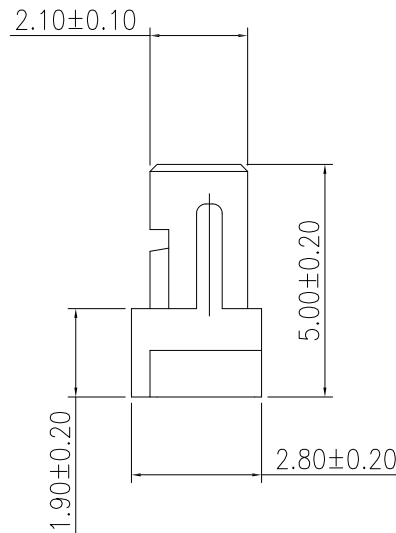
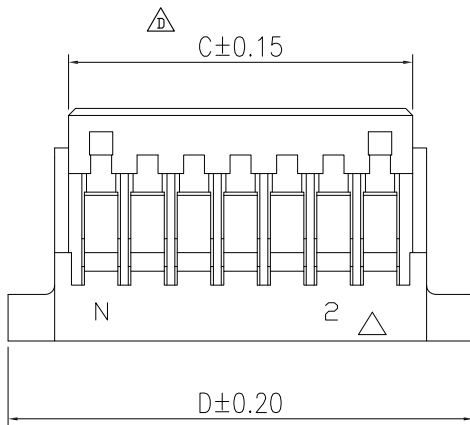



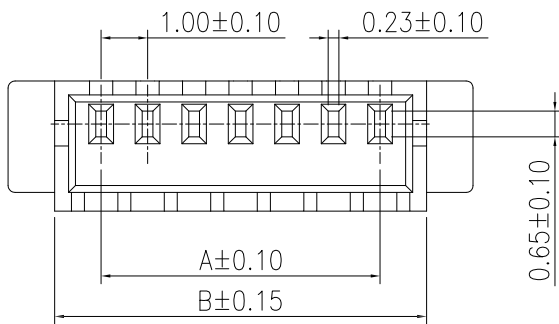

MATERIAL

Insulator : Nylon66 UL94V-0

Specification

Current Rating: 1A AC/DC

Voltage Rating: 50V AC/DC

Contact Resistance: 20mΩ Maximum

Insulation Resistance: 100MΩ Min

Dielectric Withstanding Voltage: AC 500V/Minute

Operating Temperature: -25°C~+85°C

Q'ty: 1bag=1000pcs

710-7 5 - xx W 006
1 2 3 4 5

- 7: Green Product
- 9: Green Product High Temp
- 5: 1001H
- No. of contacts per row
- W: White insulator
- Pinrex internal code.

POLES	DIMENSIONS			
	A	B	C	D
2	1.00	3.00	2.40	5.00
3	2.00	4.00	3.40	6.00
4	3.00	5.00	4.40	7.00
5	4.00	6.00	5.40	8.00
6	5.00	7.00	6.40	9.00
7	6.00	8.00	7.40	10.00
8	7.00	9.00	8.40	11.00
9	8.00	10.00	9.40	12.00
10	9.00	11.00	10.40	13.00
11	10.00	12.00	11.40	14.00
12	11.00	13.00	12.40	15.00
13	12.00	14.00	13.40	16.00
14	13.00	15.00	14.40	17.00
15	14.00	16.00	15.40	18.00
16	15.00	17.00	16.40	19.00
17	16.00	18.00	17.40	20.00
18	17.00	19.00	18.40	21.00
19	18.00	20.00	19.40	22.00
20	19.00	21.00	20.40	23.00



REV.	DESCRIPTION	DATE	TOLERANCE	SCALE	SIZE	SHEET	REV.	APP'D	NEW PART NO.	DRAW NO.
D	更新圖面	2022/11/21	.0 = ±.30	SCALE	A4	1 OF 1	D	李劍	710-75-xxW006	710-75-xxW006(D版)
C	更新圖面	2019/11/28	.00 = ±.20							
B	ADD DESCRIPTION	2012/03/15	.000 = ±.XXX							
A	RELEASE	2010/09/23	.0000 = ±.							
			ANG. = ±3°							

UNITS : mm

OLD PART NO.

DRAWER 羅商商

CHECK 李劍

TITLE

1.0mm Crimp Style Connectors Housing

PINREX

頻銳科技股份有限公司

PINREX TECHNOLOGY CORP.