


PICO-IMX7-EMMC



Main Features

- The PICO-IMX7-EMMC design based on the NXP i.MX7 processor is a purpose-built, small footprint hardware platform compatible with Intel Edison baseboards and adds a number of additional high-speed signals such as RMII LAN, USB and 24 bit TTL Display.
- ARM Cortex-A7 NXP i.MX7 scalable single/dual core System-on-Module
- WiFi 802.11ac and Bluetooth v. 4.0 communication interface

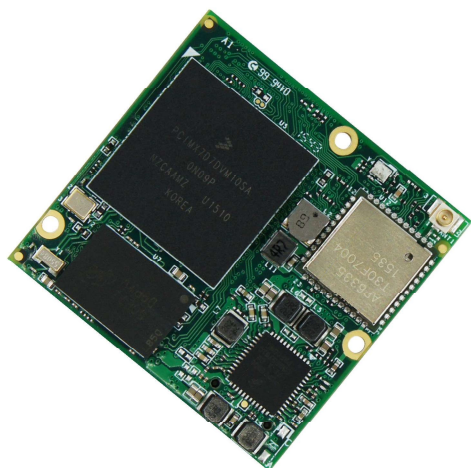

	EDISON					EXP-A		EXP-B			
Power	SDIO	I ² S	SPI	PWM		LVDS	RGMI	CAN	PCIe	HDMI	SATA
	USB OTG	UART	I ² C	GPIO		TTL		I ² C	USB HOST	MIPI	

Specifications

Core System

CPU	NXP i.MX7 Solo @ 800 MHz/Dual @ 1GHz
Technology	ARM Cortex-A7 + M4
System Memory	up to 2GB DDR3L
Storage	Onboard eMMC (default 4GB)

Connectivity

Network	RMII	Signals routed to connector
WiFi		Broadcom BCM4339 802.11ac
Bluetooth		Broadcom BCM4339 BT 4.0

I/O Interface Signalling

Edison I/O	GPIO
	PWM
	I ² C
	I ² S
	SPI
	UART
	USB-OTG
	SDIO (4-bit)
Additional I/O	24-bit TTL RGB
	RGMI LAN
	CAN
	I ² C
	MIPI
	USB Host (Dual only)
	PCIe (Dual only)

Video

PXP	Image re-sizing, rotation, overlay and CSC Pixel Processing Pipeline
-----	--

Audio

Interface	I ² S
Audio Codec	on Carrier Board

Power Specifications

Input Power	4.2-5.25V DC
-------------	--------------


Connectors

Board-to-Board	Edison compatible connector (Hirose 70-pin) Hirose 70-pin connectors
----------------	---

Operation Systems

Standard Support	Linux, Yocto, Android, Ubuntu
------------------	-------------------------------

Block Diagram

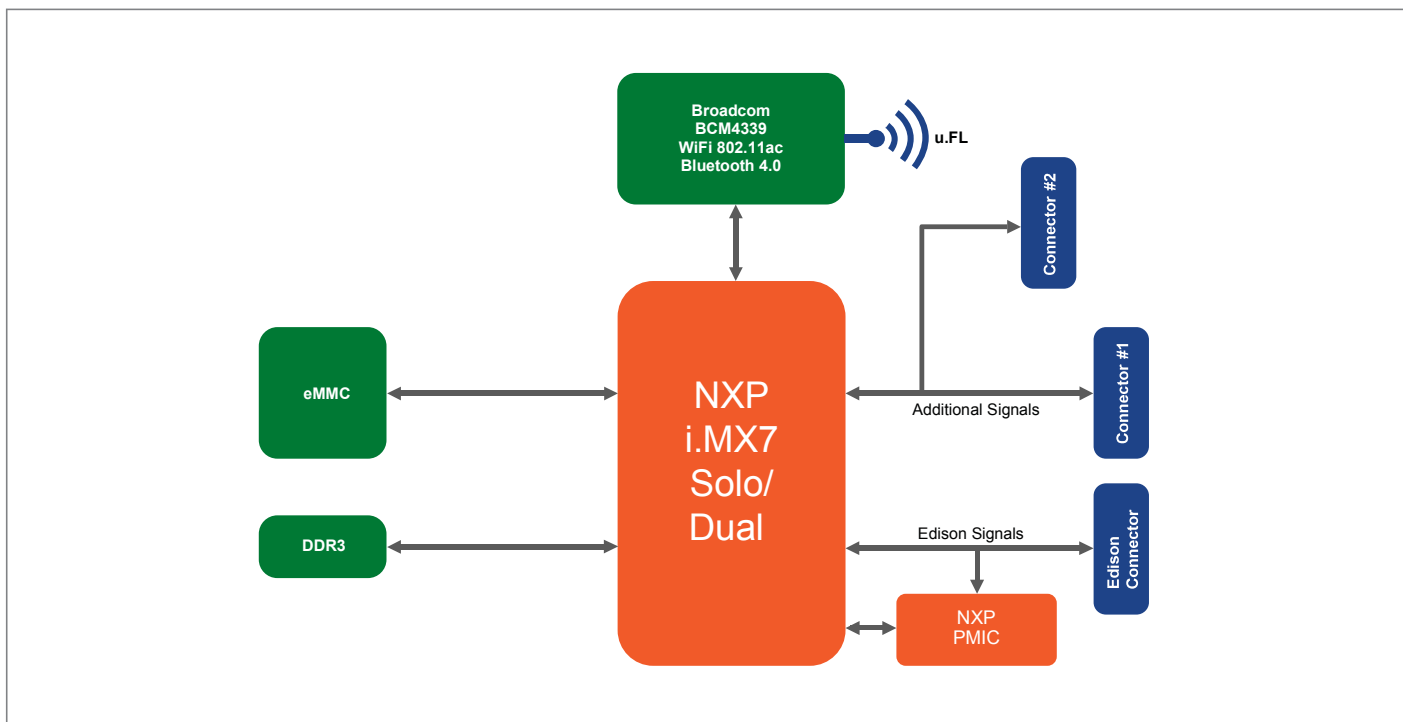


Environmental and Mechanical

Temperature	Commercial : 0° to 60° C Extended : -20° to 70° C
Humidity	10 to 90%
Dimensions	36 x 40 mm 1% x 1% inch
MTBF	>100,000 hours
Weight	8 grams
Shock	50G/25ms
Vibration	20G/0-600 Hz

Dimensions

(units in mm)

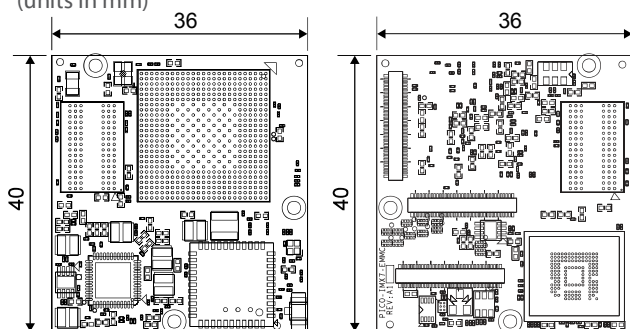

Ordering Information

PICO-IMX7x-Rxx-Exx-xx-xxx-xxxx

	Code	Description
Processor	IMX7S	i.MX7 Solo
	IMX7D	i.MX7 Dual
Memory	R05	512 MB DDR3L
	R10	1GB DDR3L
Storage	E04	eMMC capacity in Gigabyte E04 = 4GB : E08 = 8GB : E16 = 16GB E32 = 32GB : E64 = 64GB
	-	No
	BW	802.11ac + Bluetooth 4.0
	-	Commercial Temperature range (0~60° C)(Default)
Temperature Range	TE	Extended Temperature range (-20~70° C)
	TEC	Certified Extended Temperature range (-20~70° C)
	XXXX	Custom Part number ID for customized software loader and special component (BOM)

* Feel free to contact us for custom tailored Carrier Board request for your projects.