

Data sheet

734-238

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**



Technical data

Package size 100 pieces.

Pin spacing from	3.81 mm
Pin spacing from	0.15 in
pole count	8
Voltage CSA	300 V
Current CSA	10 A
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	2.098 g
Color	orange
Height	10.3 mm
Height	0.406 in
Width	32.57 mm
Width	1.282 in
Depth	8.5 mm
Depth	0.335 in

Data sheet

734-238

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

Approval	Voltage	Current	Approval number	Notes
BV	250	10	11915/A0	
CCA	250	10	123898-02	
CCA	250	10	NL5641	
CSA	300	10	154112-1465035	
CSM	250	10	017956	
DEMKO	250	10	00-00103	
DNV	250	10	E-6997	
GL	250	10	17296-00HH	
KEMA	250	10	2077592.02	
LR	250	10	96/20035	
RMR	250	10	99.00007.250	
RosTesT	250	10	B09523	

Data sheet

734-238

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

Accessories

CODING KEY TO BE SNAPPED ABOVE TOP LEVEL


Item number

734-130

Data sheet

734-238

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

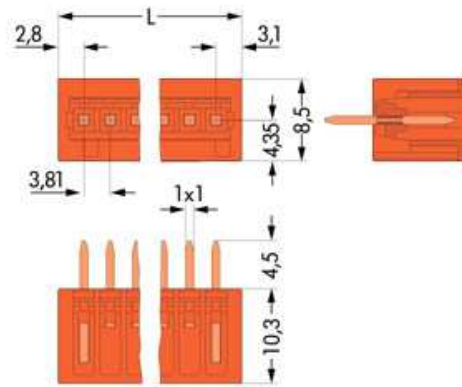

Data sheet

734-238

**HEADER STRAIGHT SOLDER PIN, 1X1 MM / 0.039X 0.039 IN
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING WITH
CLOSED END**

Diameter of drilled hole: $1,4^{+0,1}$ mm

$L = (\text{No. of poles} - 1) \times \text{pin spacing} + 5,9$ mm