

Data sheet

721-620

MALE CONNECTOR 20 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION



Technical data

Package size 10 pieces.

Pin spacing from	5 mm
Pin spacing from	0.197 in
pole count	20
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	2.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage CSA	300 V
Current CSA	15 A
Measured voltage EN	250 V
Measured shock voltage	4 kV
Pollution degree	3
Current intensity EN	12 A
Weight	29.5 g
Color	light grey
No. of connection Points	20
No. of potentials	20
Height	14.3 mm
Height	0.563 in
Width	103.2 mm
Width	4.063 in
Depth	27.5 mm
Depth	1.083 in

Data sheet

721-620

**MALE CONNECTOR 20 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION**

Strip length from	8 mm
Strip length to	9 mm
Strip length	0.33 in

Data sheet

721-620

MALE CONNECTOR 20 POLE 100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH CONTACT CAGE CLAMP CONNECTION

Approval	Voltage	Current	Approval number	Notes
BBJ	250	12	B/12/699/03	
BV	250	12	11915/A0	
CCA	250	12	DK2127	
CSM	250	12	017956	
DNV	250	12	E-6997	
GL	250	12	17296-00HH	
KEMA	250	12	98.2486.01	
KR	250/400	12/16	HMB05880-EL003	
LR	250	12	96/20035	
LR	250	12	96/20035	
NEMKO	250		P94101840	
RMR	250	12	99.00007.250	
RosTesT	250	12	B09523	

Data sheet

721-620

**MALE CONNECTOR 20 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION**

Accessories


Item number

CODING KEY FOR SNAP IN	231-129
COMB TYPE JUMPER BAR FOR PIN SPACING 5MM / 0.197 IN AND 5.08 MM / 0.2 IN	231-902
ISULATION STOP 0.08 - 0.2 MM ² / 0.2 MM ² S	231-670
ISULATION STOP 0.25 - 0.5 MM ²	231-671
ISULATION STOP 0.75 - 1 MM ²	231-672
LOCKOUT CAPS FOE COVERING UNUSED CLAMPING UNITS	231-668
OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
OPERATING TOOL FOR FEMALE AND MALE CONNECTORS WITH CAGE CLAMP	210-250
OPERATING TOOL TO CONNECT JUMPERS	209-132
PUSH BUTTON FOR FEMALE CONNECTORS AND MALE CONNECTORS	231-131
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620

Data sheet

721-620

MALE CONNECTOR 20 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION

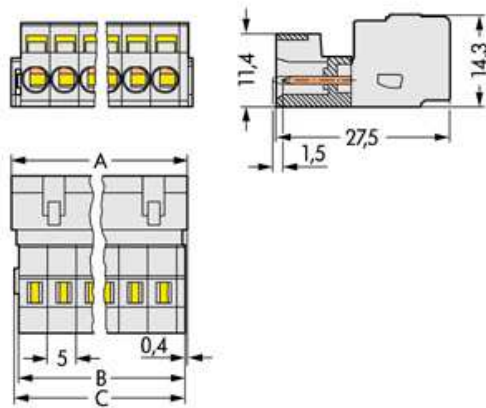

Data sheet

721-620

**MALE CONNECTOR 20 POLE
100% PROTECTED AGAINST MISMATING WITHOUT PRECEDING EARTH
CONTACT CAGE CLAMP CONNECTION**

A = (No.of poles x pin spacing) + 3,2 mm

B = A - 1,7 mm

C = A - 1,2 mm