

2JMAS04

Specification:


Frequency	GSM (900 MHz)/DCS (1800 MHz)
Impedance	50 Ohms
Polarization	Horizontal / Vertical
Gain	0dBi
VSWR	<2:1
Power handling	25W
Operating temperature	-40°C to +85°C


Connection:

Connector type	upon request
Cable length	upon request
Cable type	upon request


Dimensions:

Max height	3.3mm
Max length	42mm
Max width	16mm

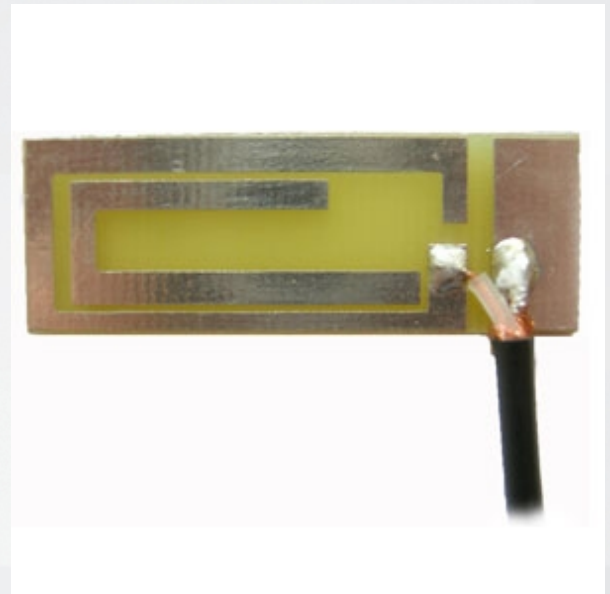

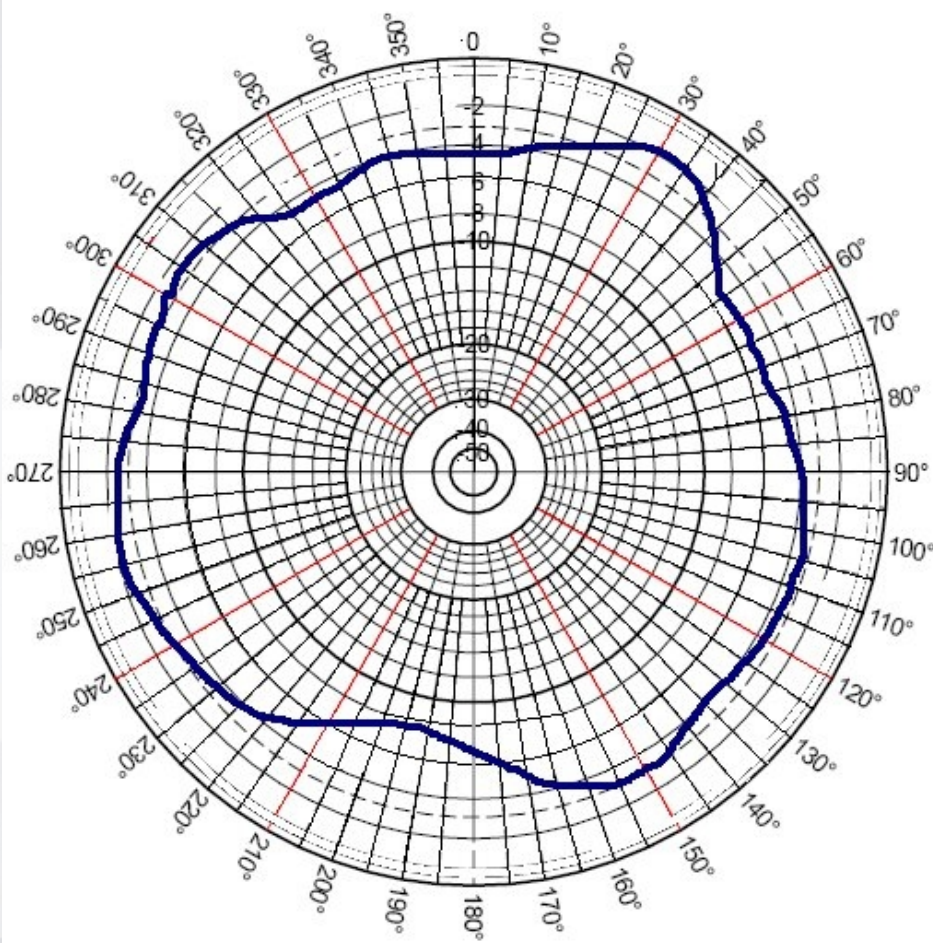

Azimuthal Pattern (X, Y or E-Plane)

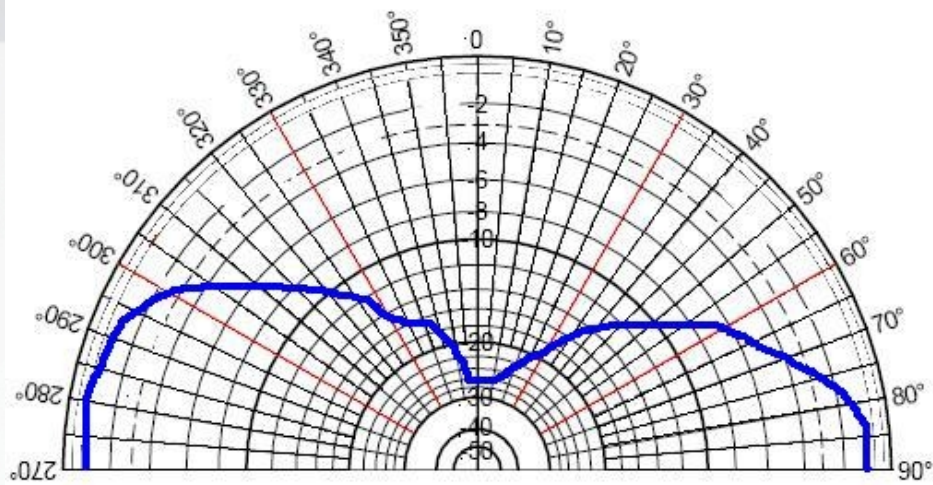

Elevation Pattern (Z, Y or H-Plane)

