

## 2J7050Ba

CELLULAR/LTE MIMO, 2.4/5.0 GHz ISM MIMO and GNSS

### Key Features

**Cable 1 and 2: CELLULAR / LTE**

**Cable 3 and 4: 2.4/5.0 GHz ISM**

**Cable 5: GPS/GLONASS**

Screw Mount

Heavy Duty antenna

High Performance

Ground Plane Independent

Anti-Rotation Mounting

Customizable Cable and Connector

Dimensions: Ø 96 x H 90 mm

Certificates: IP67, IP69, IK09



### Description

Compact heavy duty antenna designed for 4G LTE, 2.4/5.0 GHz ISM and GNSS suitable for wide range of applications within industry. Antenna is made with specific anti-rotation mounting system. Housing of the antenna is certified for standards of IP67 for water resistance, IK09 for high impact resistance and IP69K standard for high pressure and hot water ingress.



## 1. Antenna and electrical specifications

Cable 1

Parameters	CELLULAR / LTE Antenna		
<b>Standards</b>	2G,3G and 4G		
<b>Band (MHz)</b>	700/850/900	1700/1800/1900/2100	2600
<b>Frequency (MHz)</b>	698-960	1710-2170	2500-2700
<b>Return Loss (dB)</b>	~-10.6	~-15.6	~-11.7
<b>VSWR</b>	~1.9:1	~1.6:1	~1.7:1
<b>Efficiency (%)</b>	~57	~57	~47
<b>Peak Gain (dBi)</b>	~-2.1	~-4.2	~-3.1
<b>Average Gain (dB)</b>	~-2.4	~-2.5	~-3.3
<b>Impedance (Ohm)</b>	50		
<b>Polarisation</b>	Linear		
<b>Radiation Pattern</b>	Omni-Directional		
<b>Max. Input Power (W)</b>	25		
<b>Connector Type</b>	Most RF Connectors (SMA-Male Standard)		
<b>Cable Length</b>	Any Cable Length (300 cm Standard)		
<b>Cable Type</b>	Other Cables Available (LMR195 Standard)		

Cable 2

Parameters	CELLULAR / LTE Antenna		
<b>Standards</b>	2G,3G and 4G		
<b>Band (MHz)</b>	700/850/900	1700/1800/1900/2100	2600
<b>Frequency (MHz)</b>	698-960	1710-2170	2500-2700
<b>Return Loss (dB)</b>	~-11.0	~-14.3	~-16.5
<b>VSWR</b>	~1.9:1	~1.6:1	~1.4:1
<b>Efficiency (%)</b>	~63	~54	~57
<b>Peak Gain (dBi)</b>	~-3.0	~-3.2	~-4.0
<b>Average Gain (dB)</b>	~-2.0	~-2.6	~-2.4
<b>Impedance (Ohm)</b>	50		
<b>Polarisation</b>	Linear		
<b>Radiation Pattern</b>	Omni-Directional		
<b>Max. Input Power (W)</b>	25		
<b>Connector Type</b>	Most RF Connectors (SMA-Male Standard)		
<b>Cable Length</b>	Any Cable Length (300 cm Standard)		
<b>Cable Type</b>	Other Cables Available (LMR195 Standard)		

**Antenna Measurement Conditions:**

Mounted on Metal Plate of 30 x 30 cm  
 200 cm of LMR195 Cable  
 Measured in Certified CTIA 3D Anechoic Chamber

## 1. Antenna and electrical specifications

**Cable 3**

Parameters	2.4/5.0 GHz ISM Antenna	
<b>Standards</b>	WiFi, BT, ZigBee, ISM	
<b>Band (MHz)</b>	2.4 GHz	5.0 GHz
<b>Frequency (MHz)</b>	2410-2490	4920-5925
<b>Return Loss (dB)</b>	~-10.4	~-13.6
<b>VSWR</b>	~1.9:1	~1.6:1
<b>Efficiency (%)</b>	~58	~64
<b>Peak Gain (dBi)</b>	~5.6	~5.5
<b>Average Gain (dB)</b>	~-2.3	~-1.9
<b>Impedance (Ohm)</b>	50	
<b>Polarisation</b>	Linear	
<b>Radiation Pattern</b>	Omni-Directional	
<b>Max. Input Power (W)</b>	25	
<b>Connector Type</b>	Most RF Connectors (SMA-Male Standard)	
<b>Cable Length</b>	Any Cable Length (300 cm Standard)	
<b>Cable Type</b>	Other Cables Available (LMR195 Standard)	

**Cable 4**

Parameters	2.4/5.0 GHz ISM Antenna	
<b>Standards</b>	WiFi, BT, ZigBee, ISM	
<b>Band (MHz)</b>	2.4 GHz	5.0 GHz
<b>Frequency (MHz)</b>	2410-2490	4920-5925
<b>Return Loss (dB)</b>	~-8.9	~-13.6
<b>VSWR</b>	~2.1:1	~1.6:1
<b>Efficiency (%)</b>	~57	~59
<b>Peak Gain (dBi)</b>	~5.5	~4.4
<b>Average Gain (dB)</b>	~-2.4	~-2.3
<b>Impedance (Ohm)</b>	50	
<b>Polarisation</b>	Linear	
<b>Radiation Pattern</b>	Omni-Directional	
<b>Max. Input Power (W)</b>	25	
<b>Connector Type</b>	Most RF Connectors (SMA-Male Standard)	
<b>Cable Length</b>	Any Cable Length (300 cm Standard)	
<b>Cable Type</b>	Other Cables Available (LMR195 Standard)	

**Antenna Measurement Conditions:**

Mounted on Metal Plate of 30 x 30 cm  
 200 cm of LMR195 Cable  
 Measured in Certified CTIA 3D Anechoic Chamber

## 2. Mechanical and environmental specifications



Cable 5




Parameters	GPS/GLONASS Antenna	
Standard	GPS / GLONASS	
Band (MHz)	1575	1602
Frequency(MHz)	1575.42	1598-1610
Return Loss (dB)	<=-14	
VSWR	<=1.5:1	
Impedance	50	
Radiation Pattern	Hemispherical	
Polarization	RHCP	
Saw Filter	Pre-Filter	
Active Gain (dB)	28 @ 2.7 V	
Noise Figure (dB)	1.8 @ 2.7 V	
Voltage (V)	1.5 – 3.6	
Current Consumption (mA)	9 @ 2.7 V	
Power Consumption (mW)	24.3 @ 2.7 V	
Out of Band Rejection (dBc)	~43	
ESD Protection (kV)	6	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	LMR100 Standard (Other Cables Available)	

Specifications	2J7050Ba
Mounting Type	Screw Mount
Dimensions (mm)	Ø 96 x H 90
Radome	ASA
Radome color	White, Black
Antenna Base	Alluminium alloy
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67, IP69, IK09



### 3. Antenna parameters




Cable 1: CELLULAR/LTE

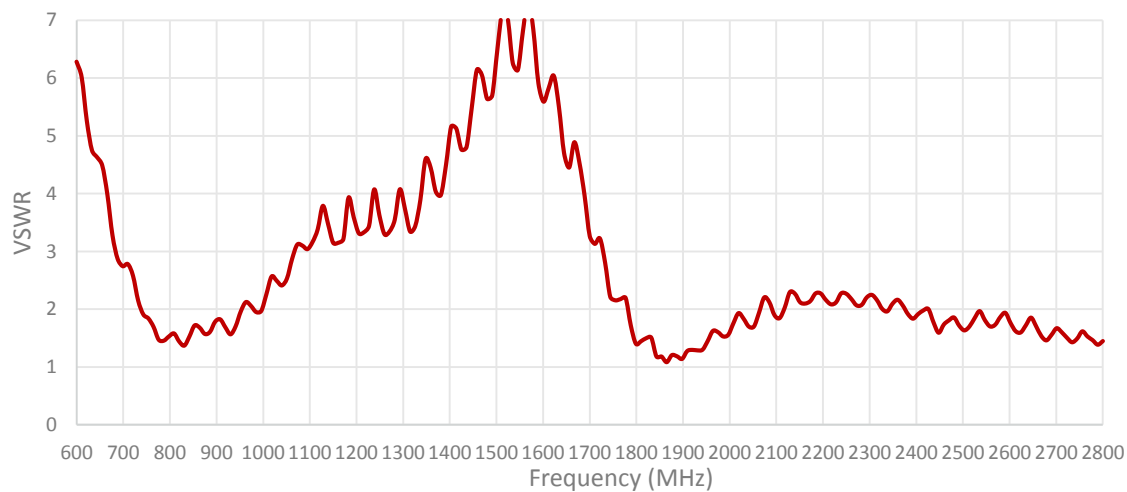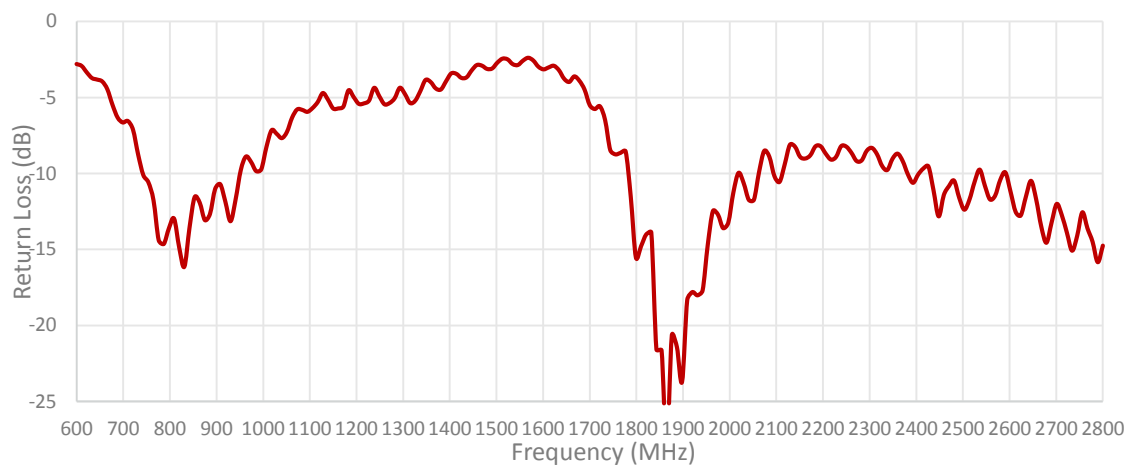

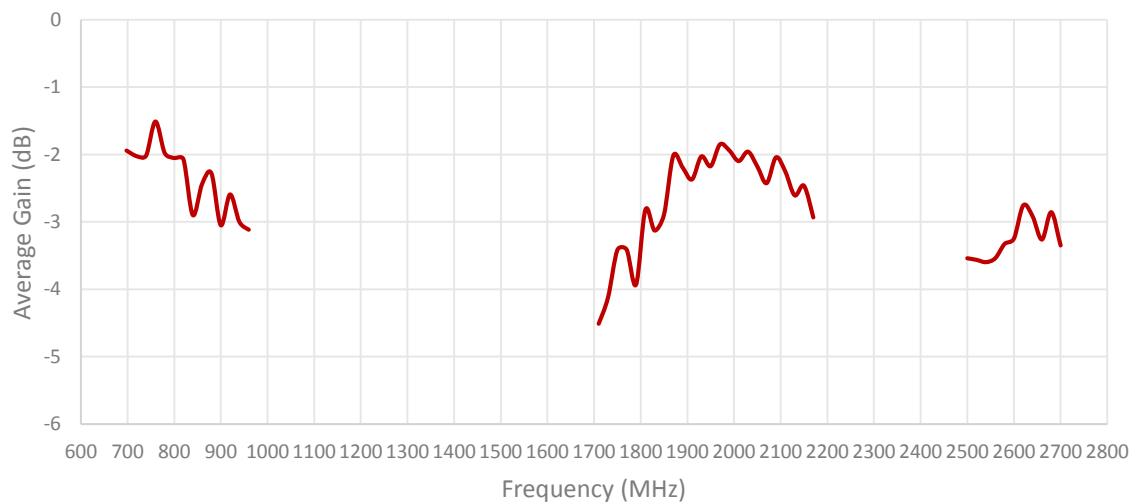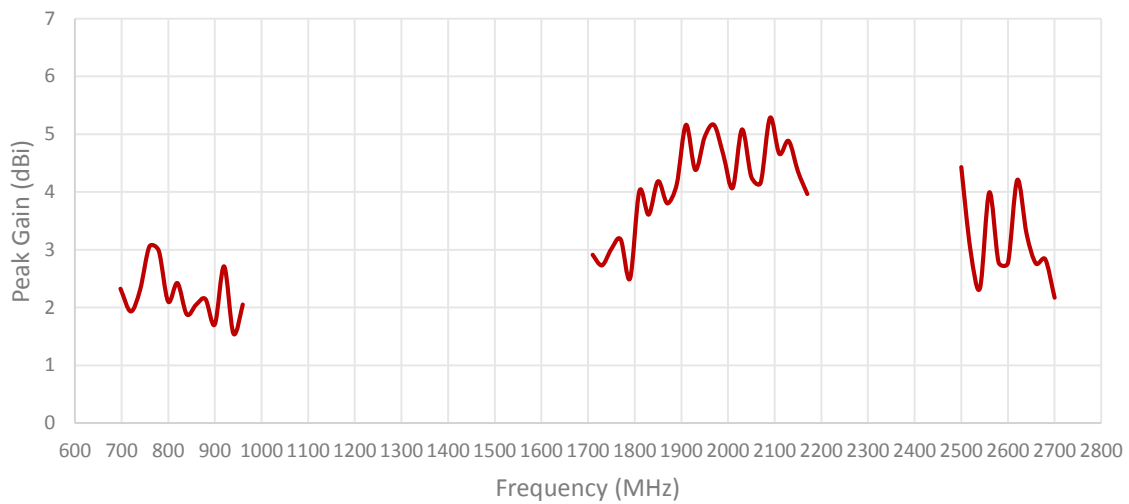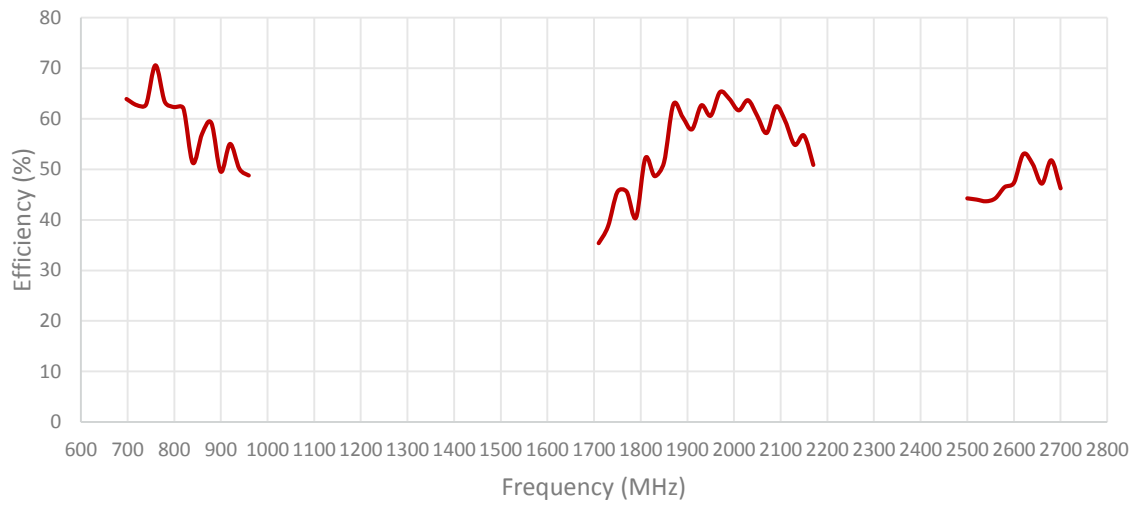


**Table 2: CELLULAR/LTE**

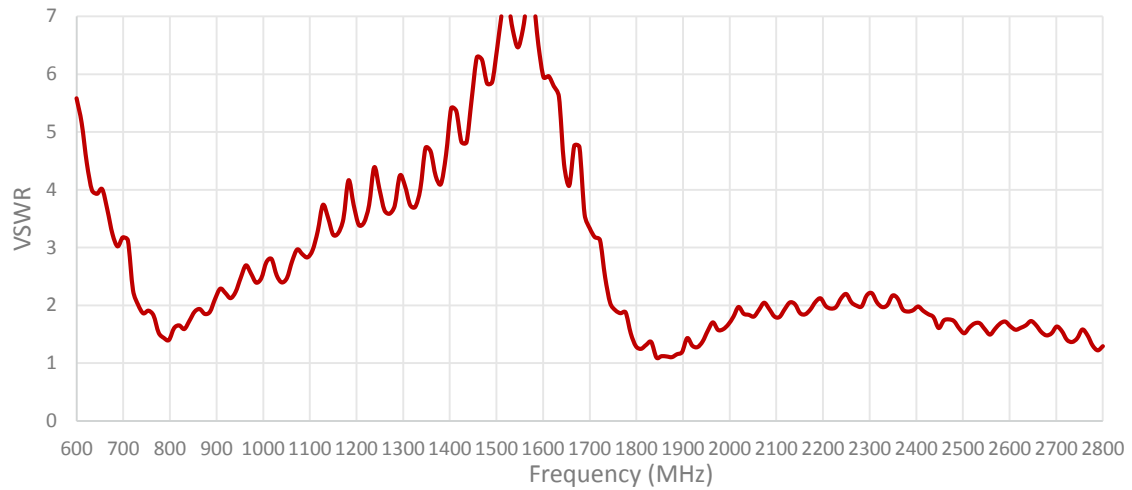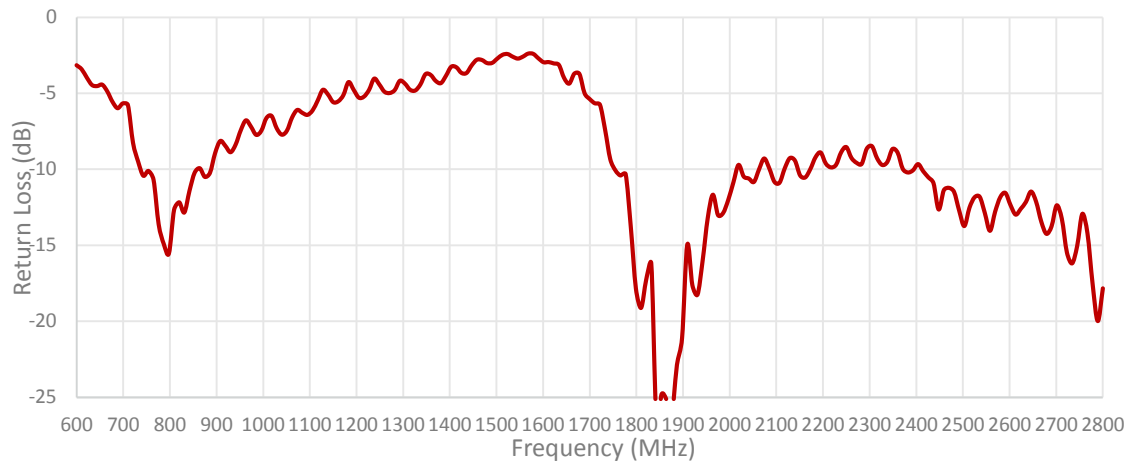

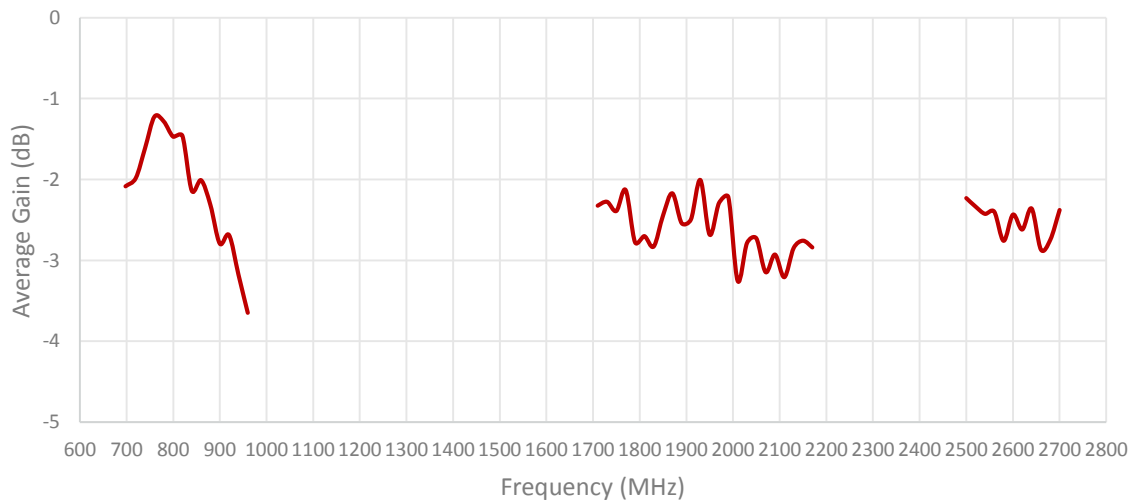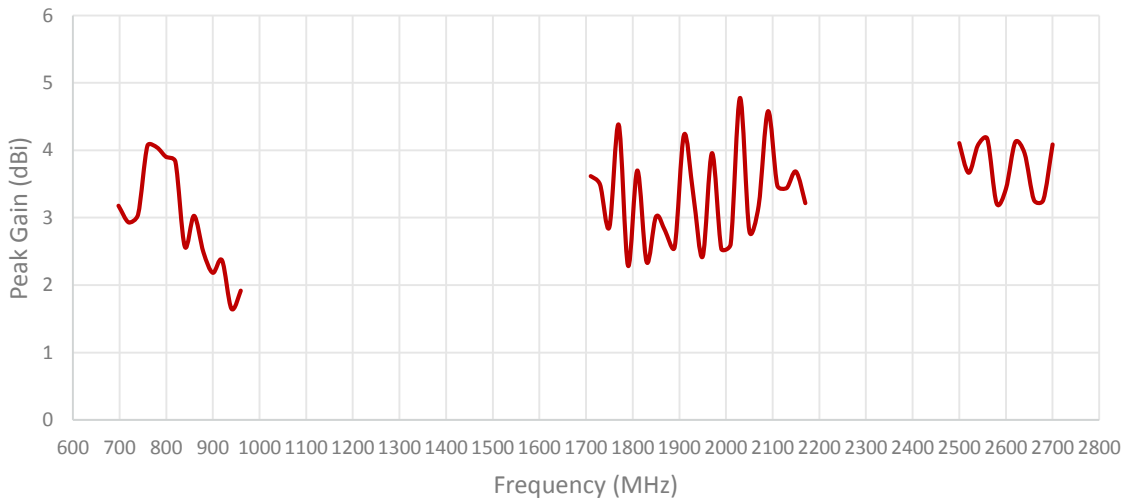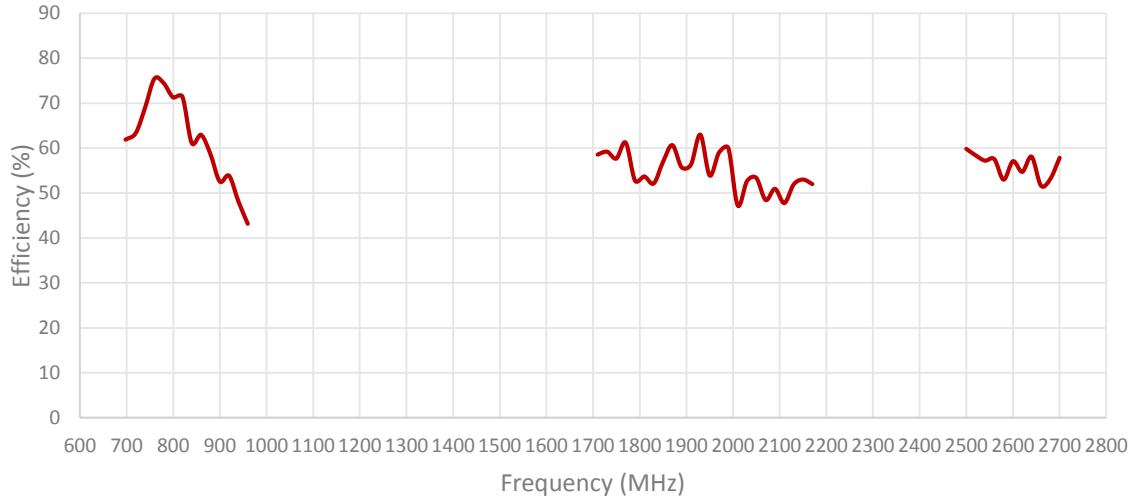






**ISOLATION FOR CABLES 1 AND 2**



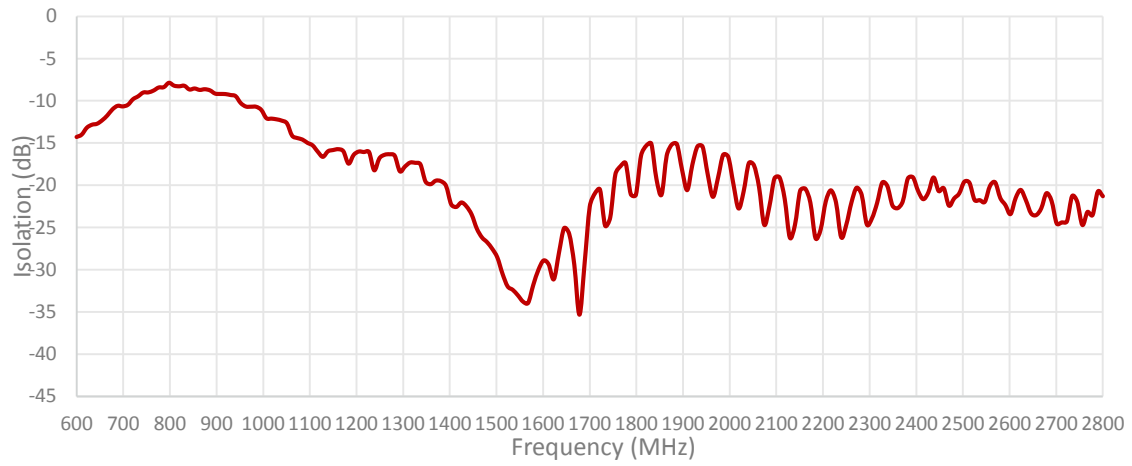


**ENVELOPE CORRELATION COEFFICIENT FOR CABLES 1 AND 2**


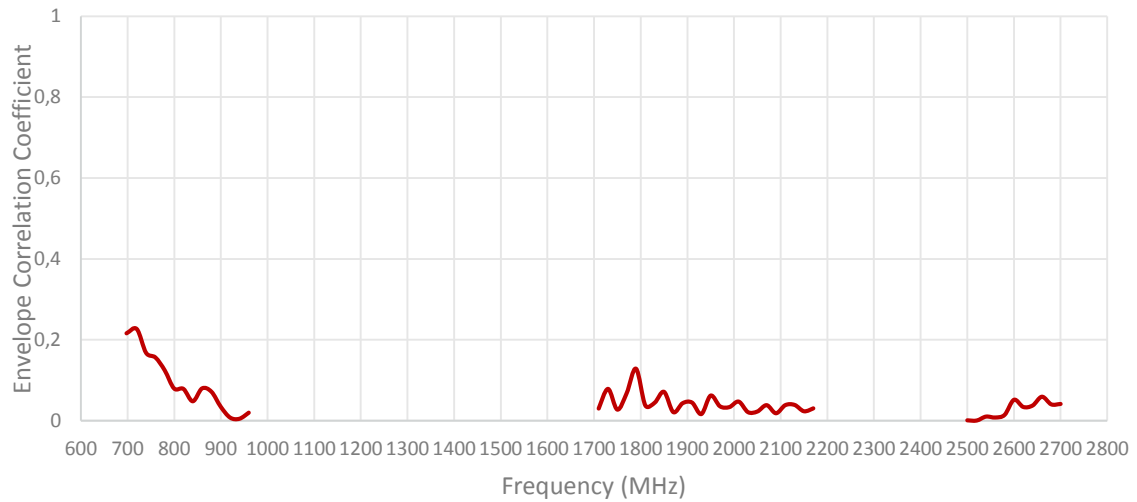




**Cable 3: 2.4/5.0 GHz ISM**

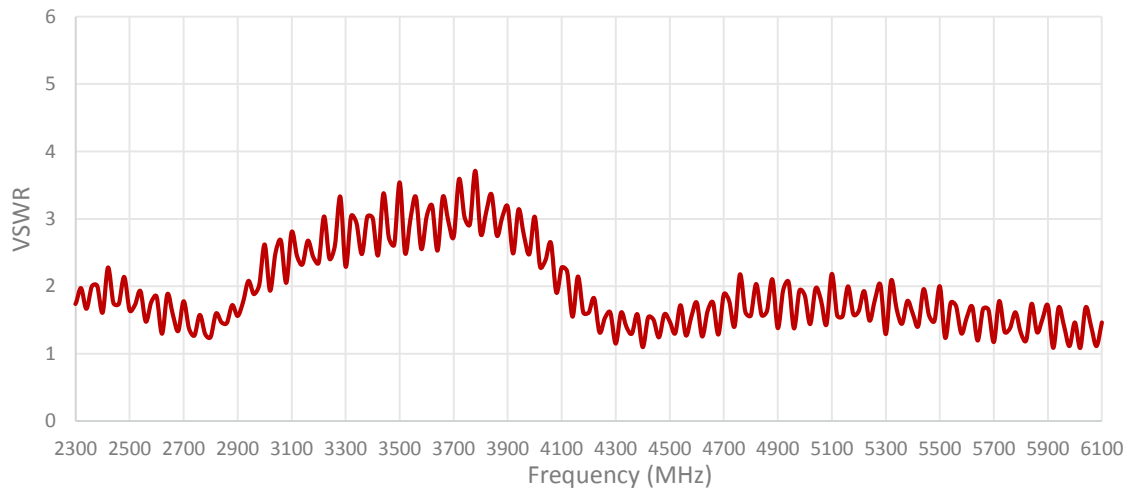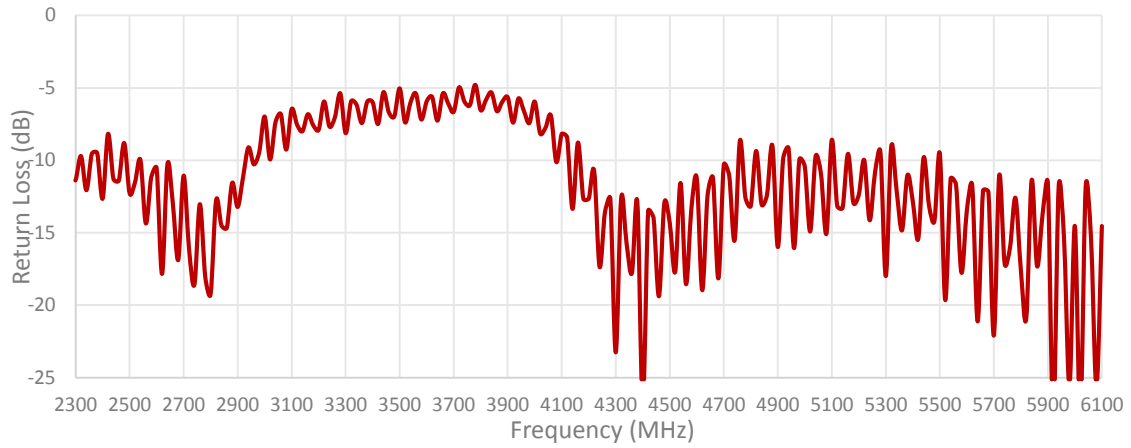

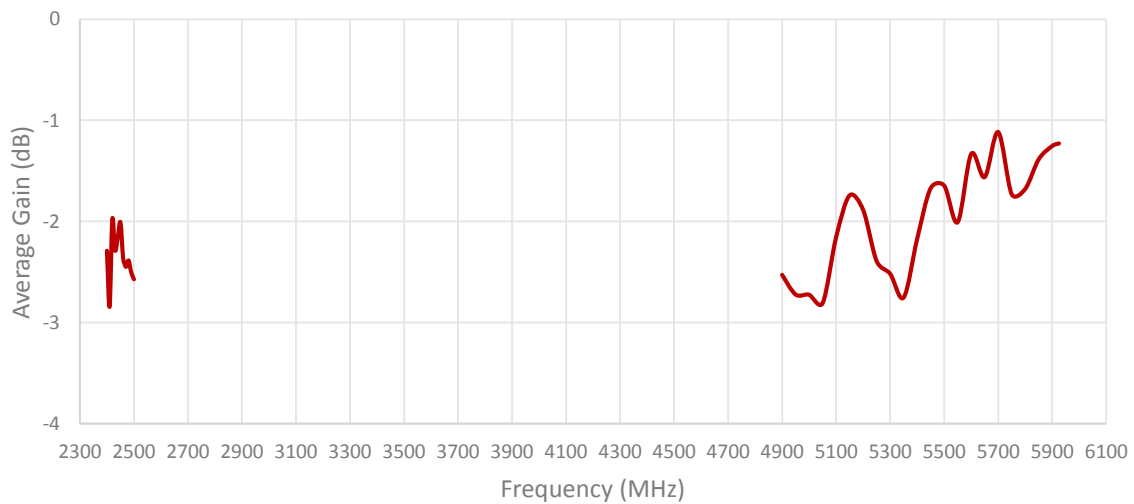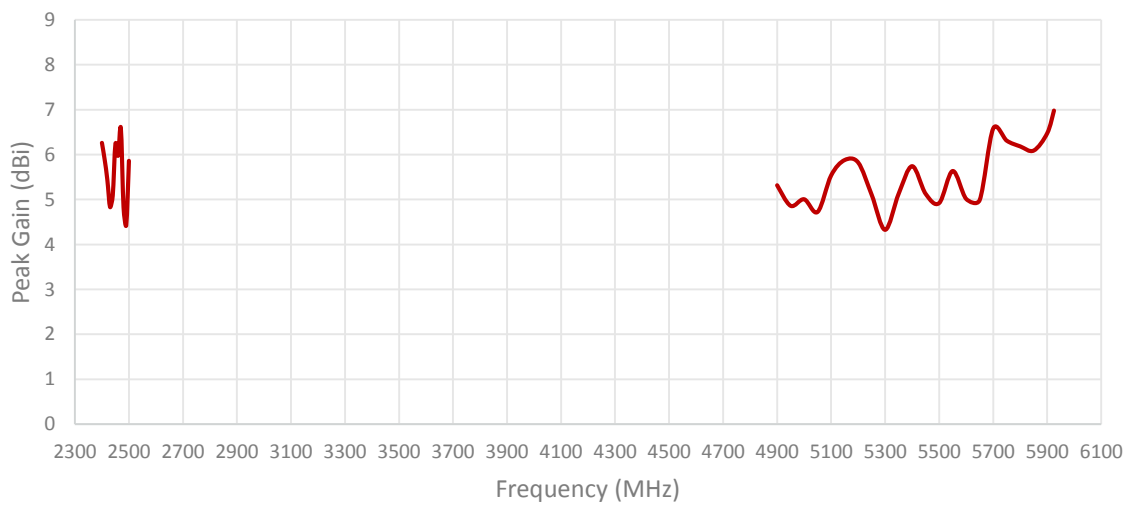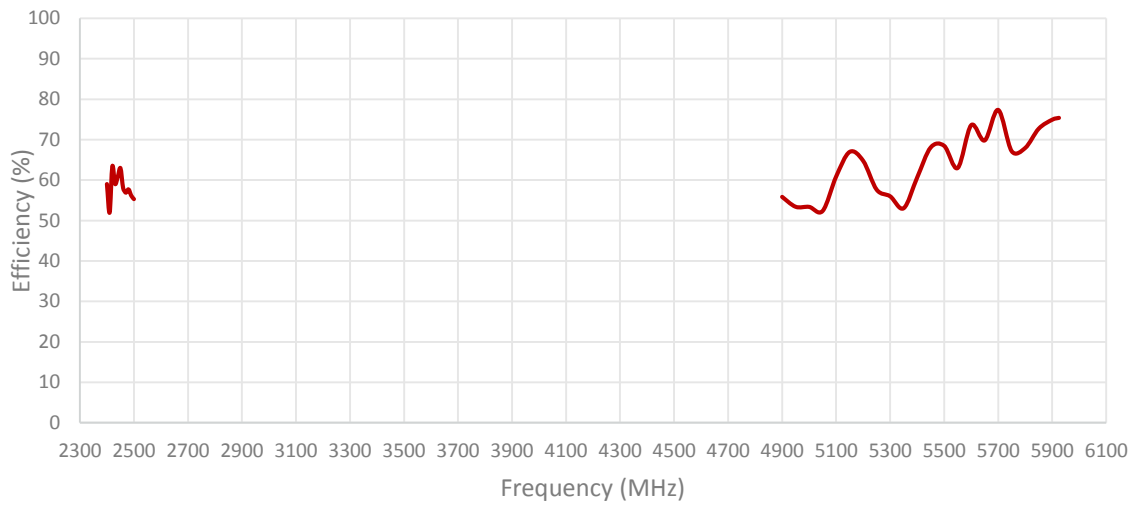


**Table 4: 2.4/5.0 GHz ISM**

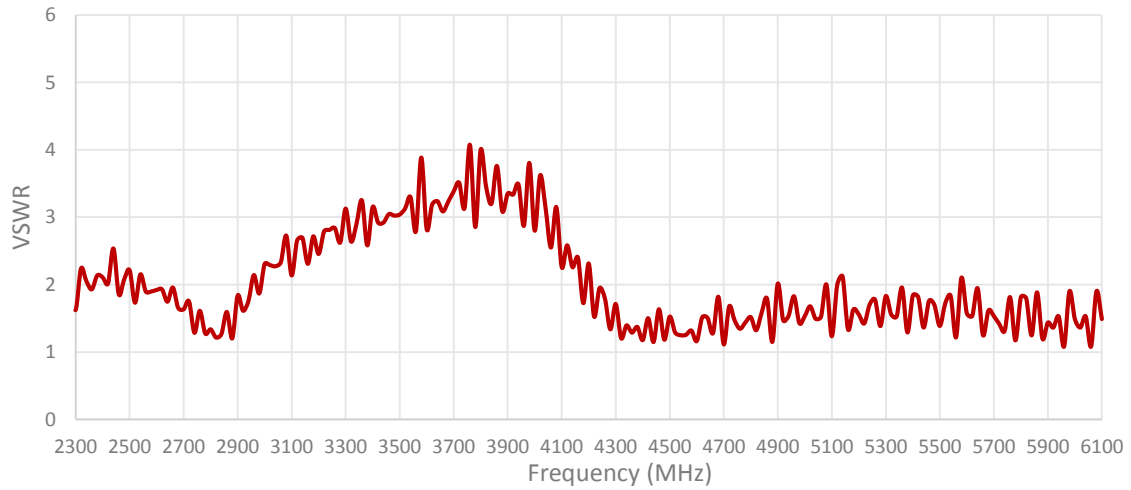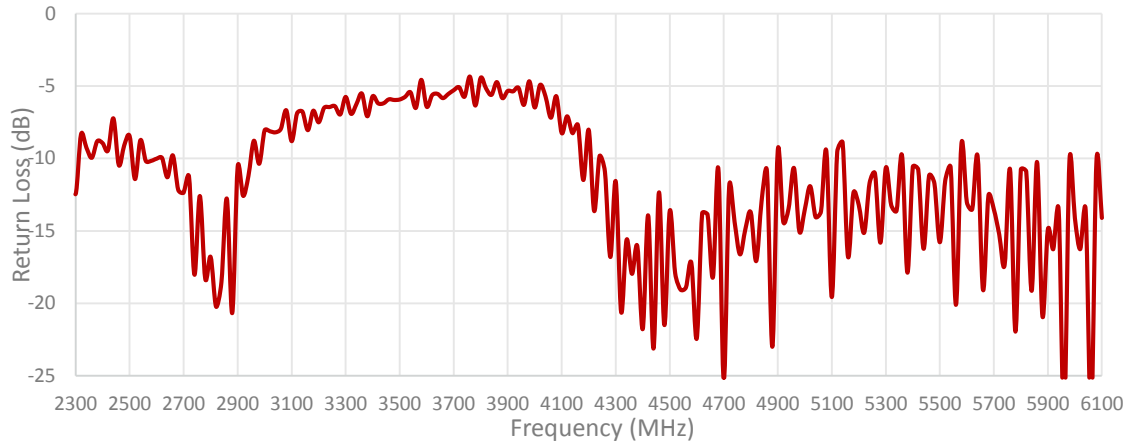


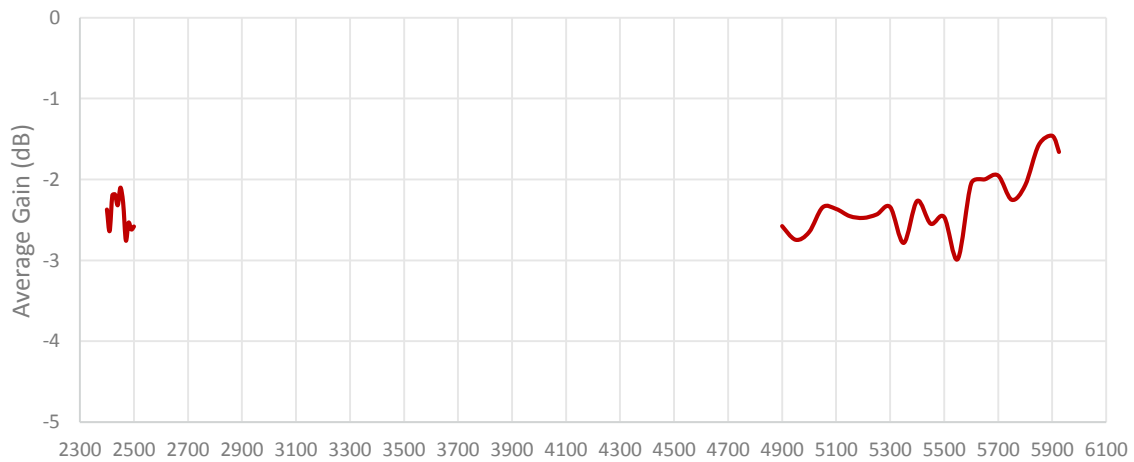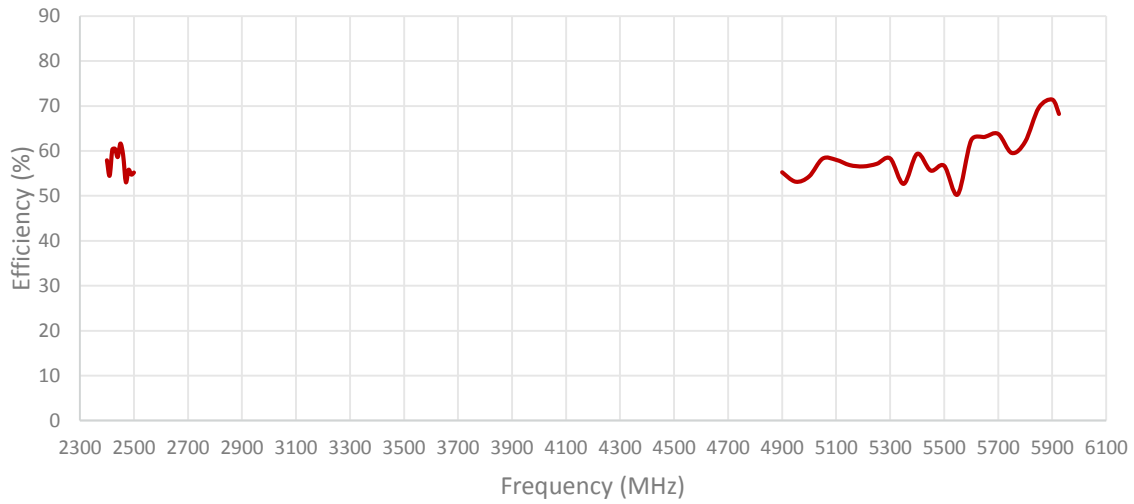


**ISOLATION FOR CABLES 3 AND 4**

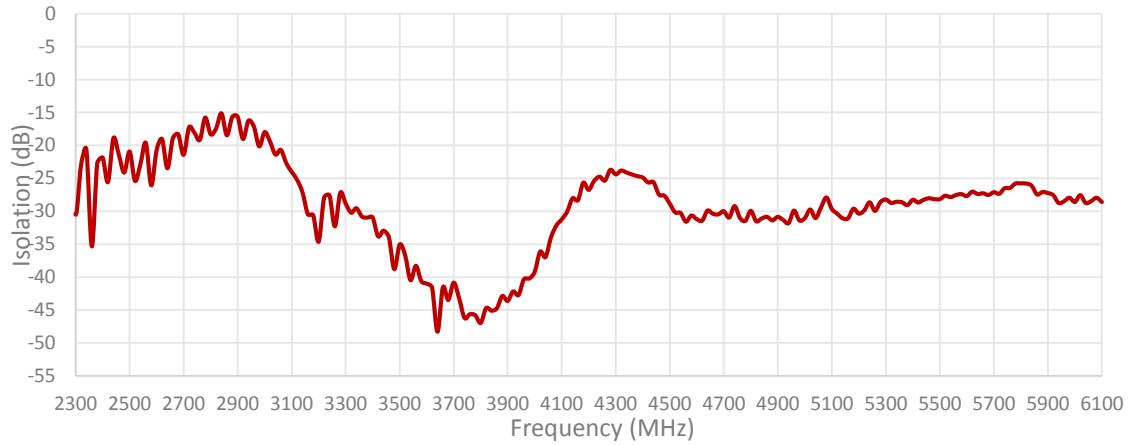


**ENVELOPE CORRELATION COEFFICIENT FOR CABLES 3 AND 4**

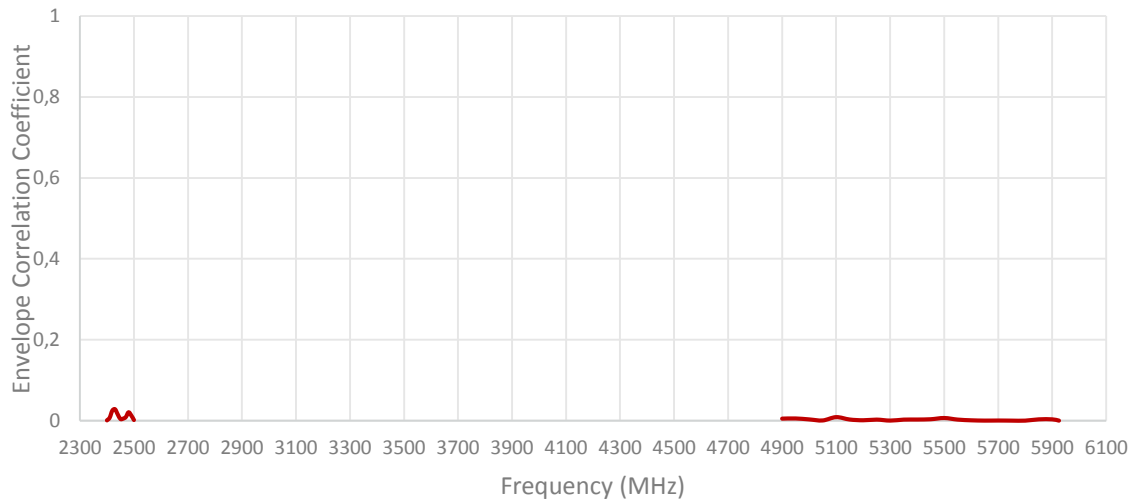

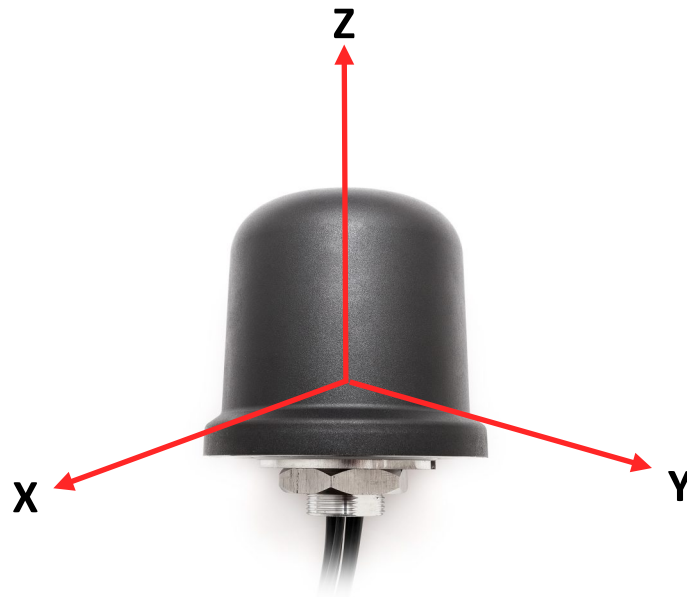


Radiation pattern reference


Cable 1: CELLULAR/LTE

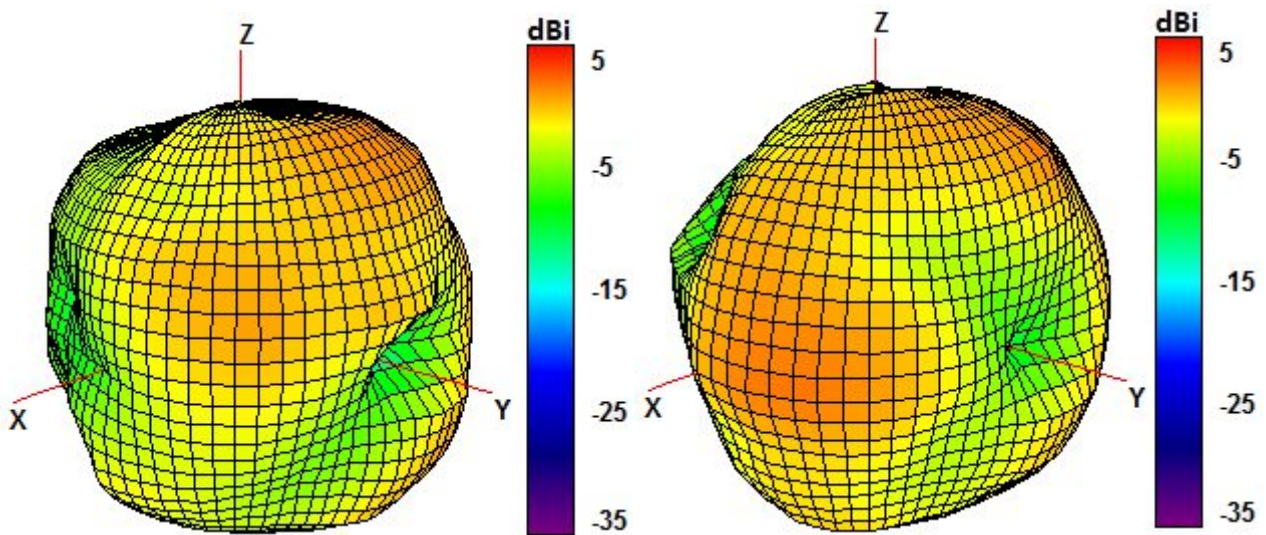

750 and 850 MHz Radiation pattern

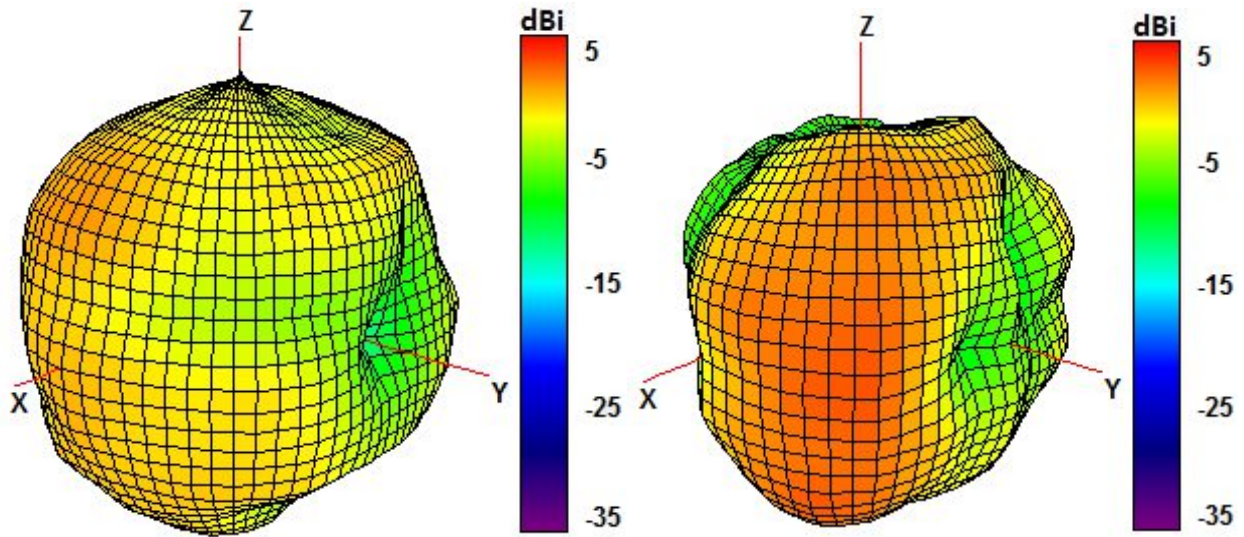


940 and 1750 MHz Radiation pattern

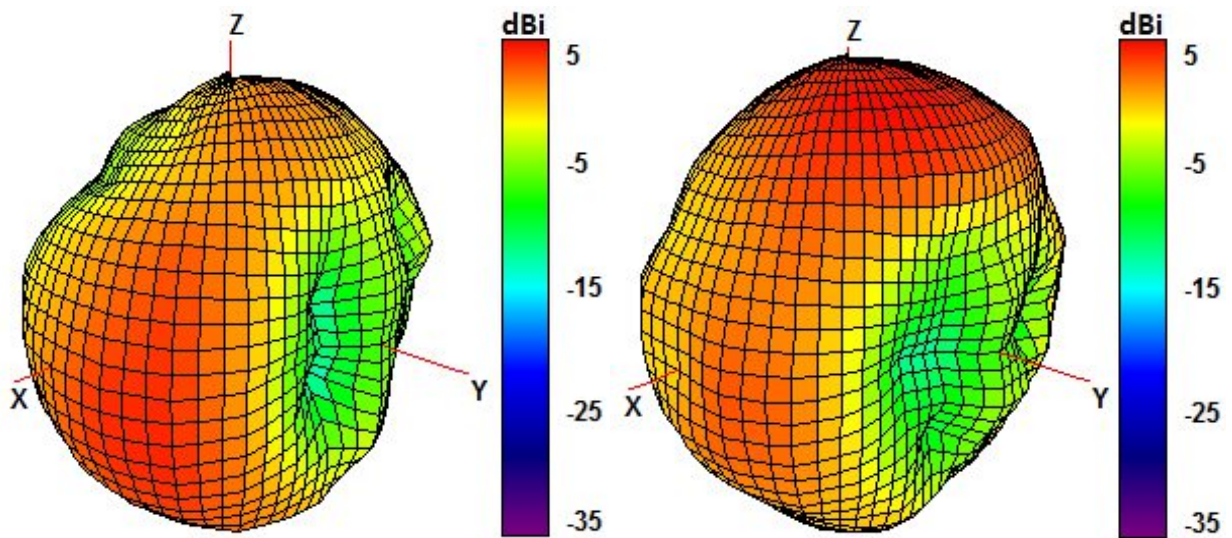


1850 and 1950 MHz Radiation pattern



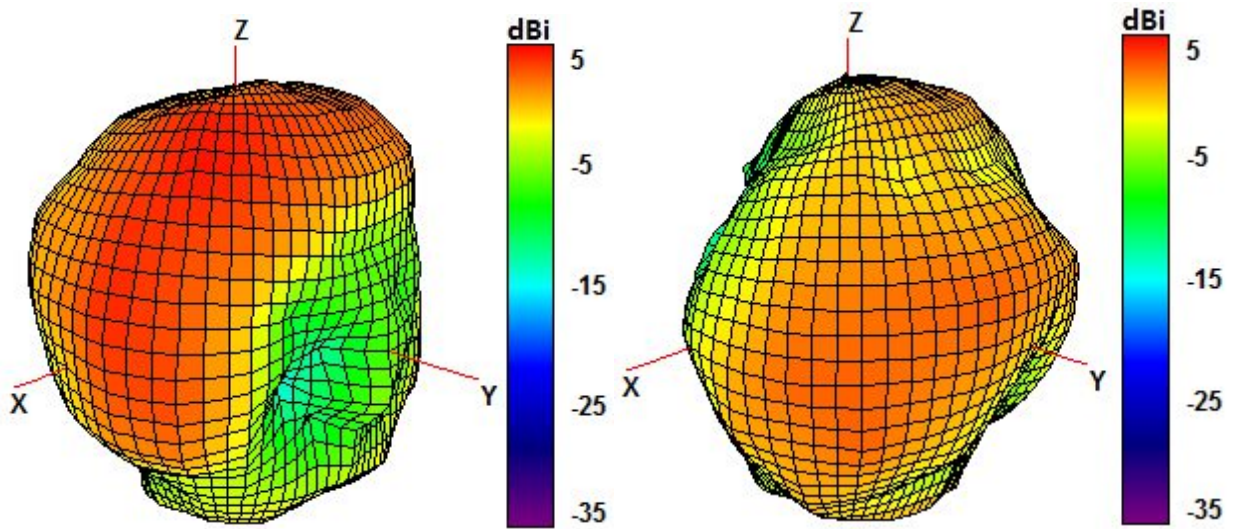


2100 and 2600 MHz Radiation pattern


Cable 2: CELLULAR/LTE

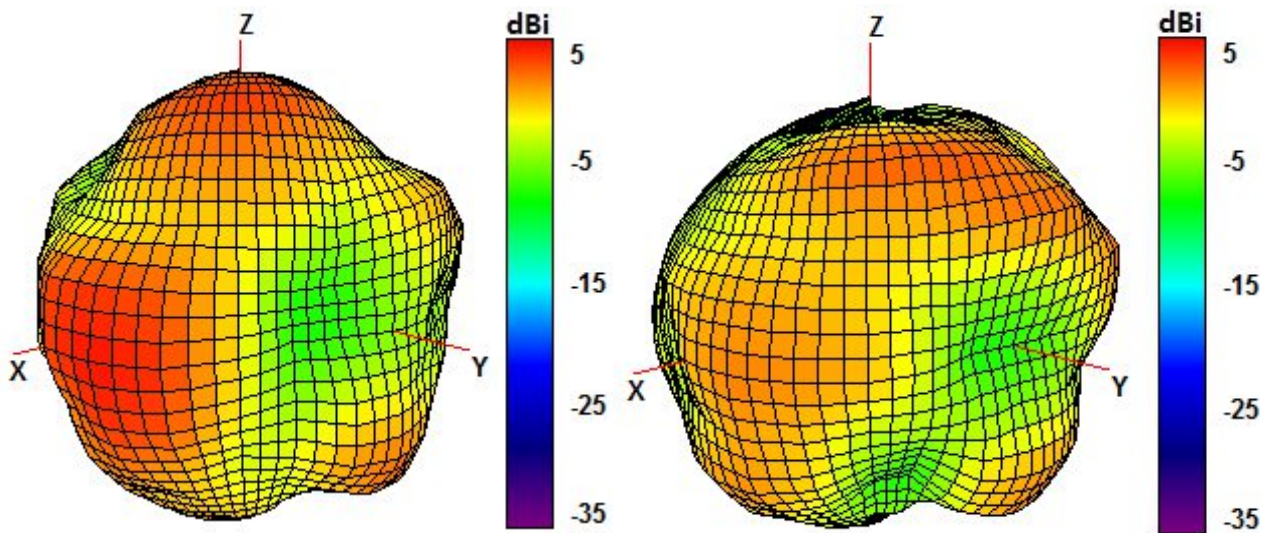


750 and 850 MHz Radiation pattern

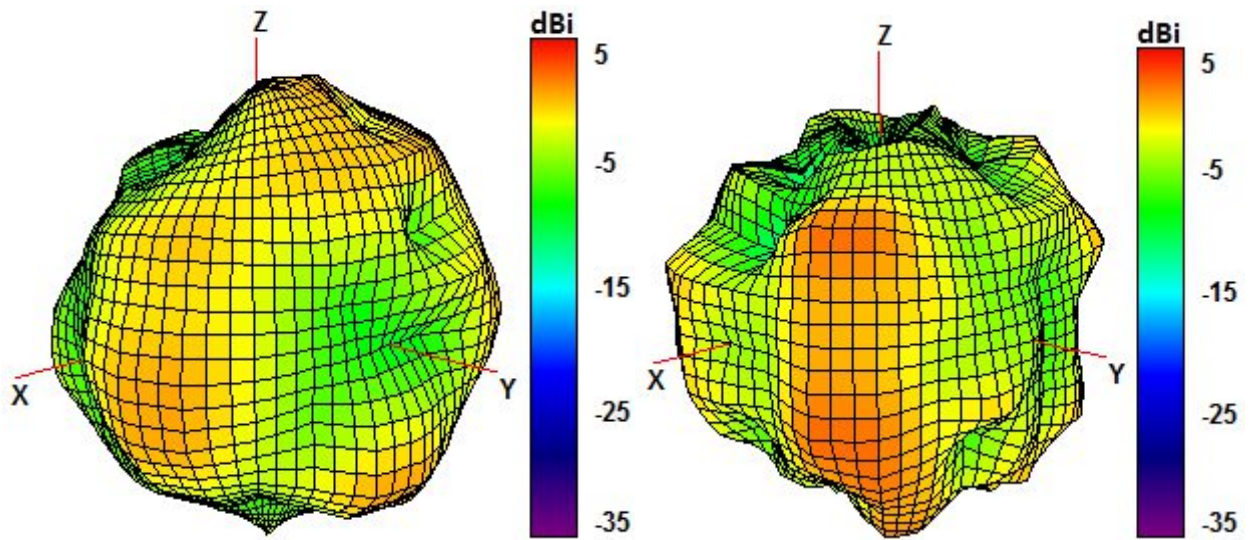

940 and 1750 MHz Radiation pattern

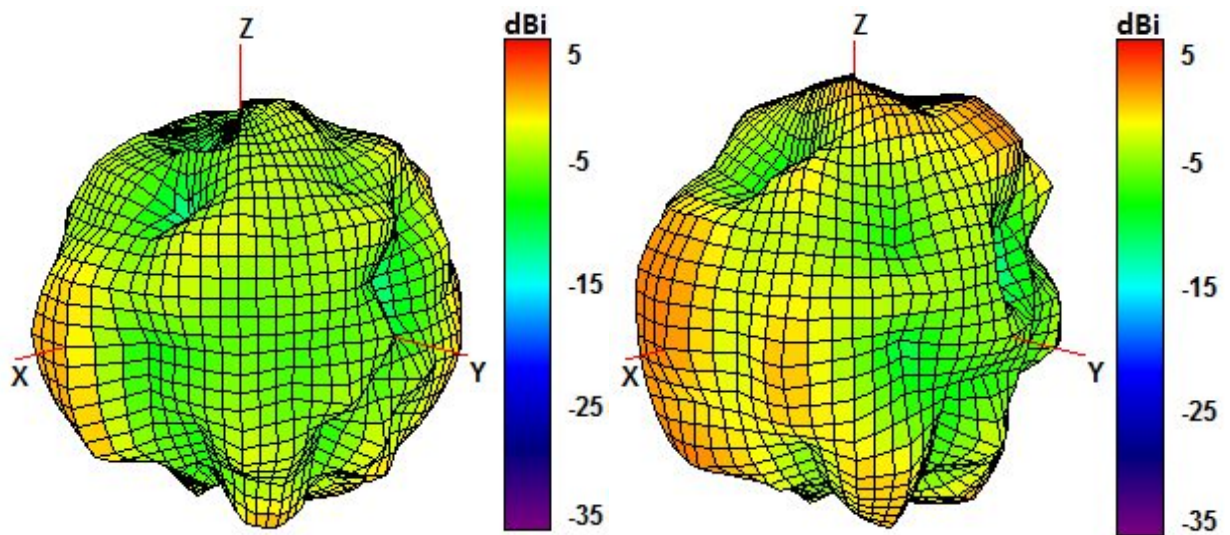


1850 and 1950 MHz Radiation pattern

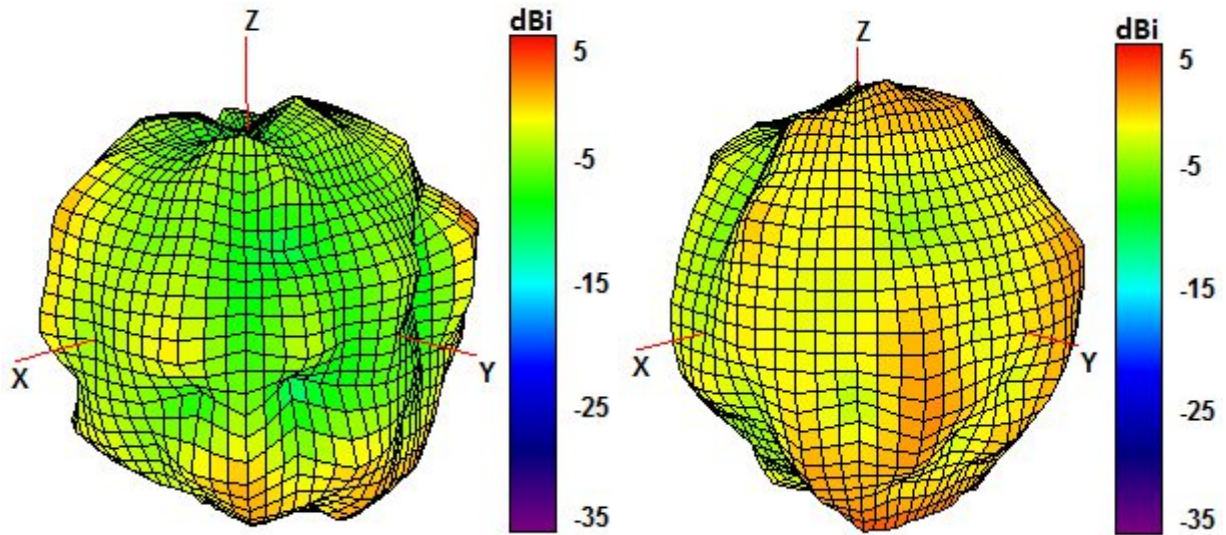


2100 and 2600 MHz Radiation pattern

Cable 3: 2.4/5.0 GHz ISM

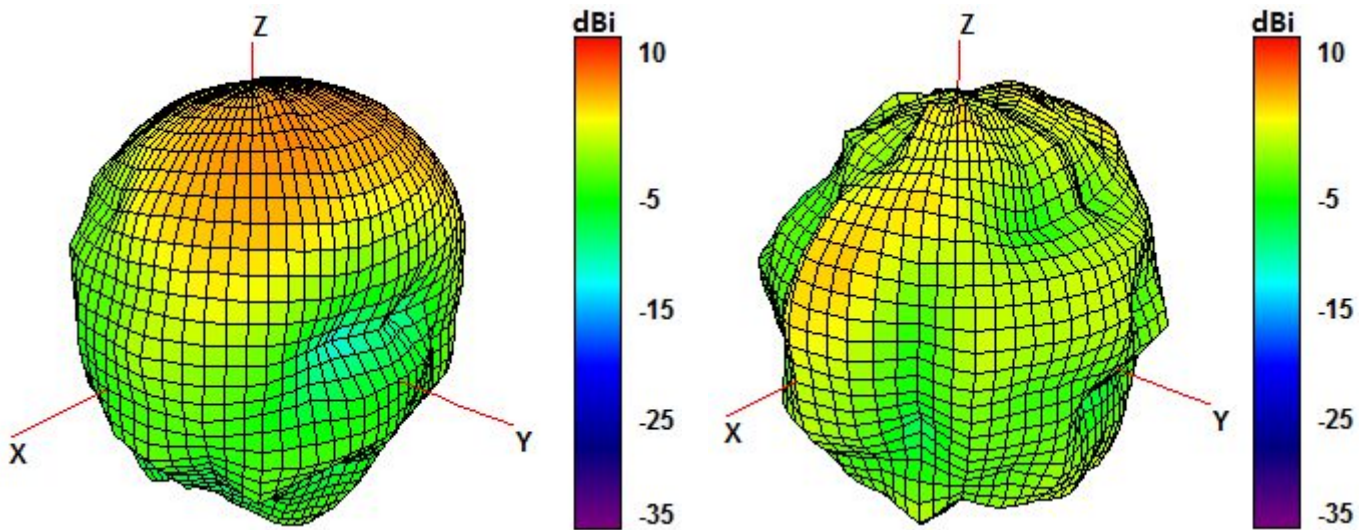




2450 and 5500 MHz Radiation pattern

Cable 4: 2.4/5.0 GHz ISM

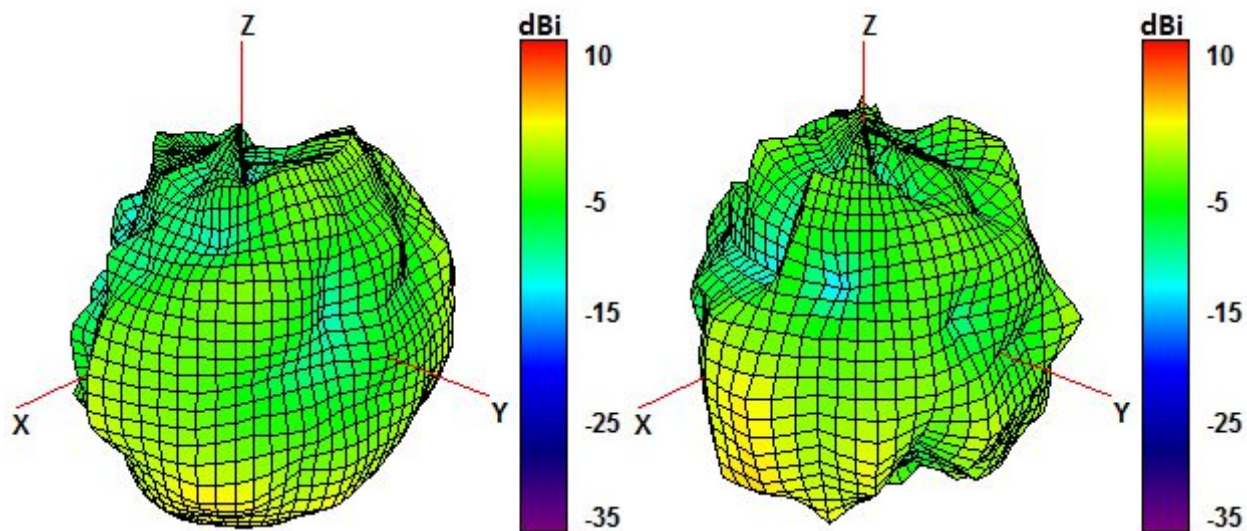


2450 and 5500 MHz Radiation pattern

## 4. Antenna drawings

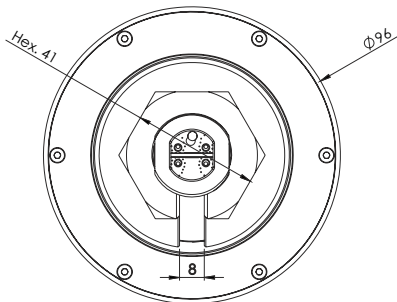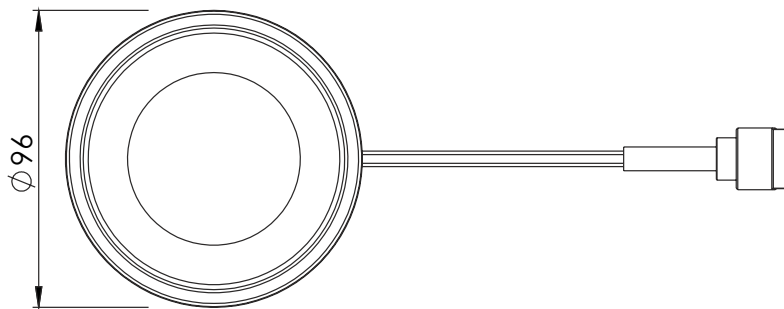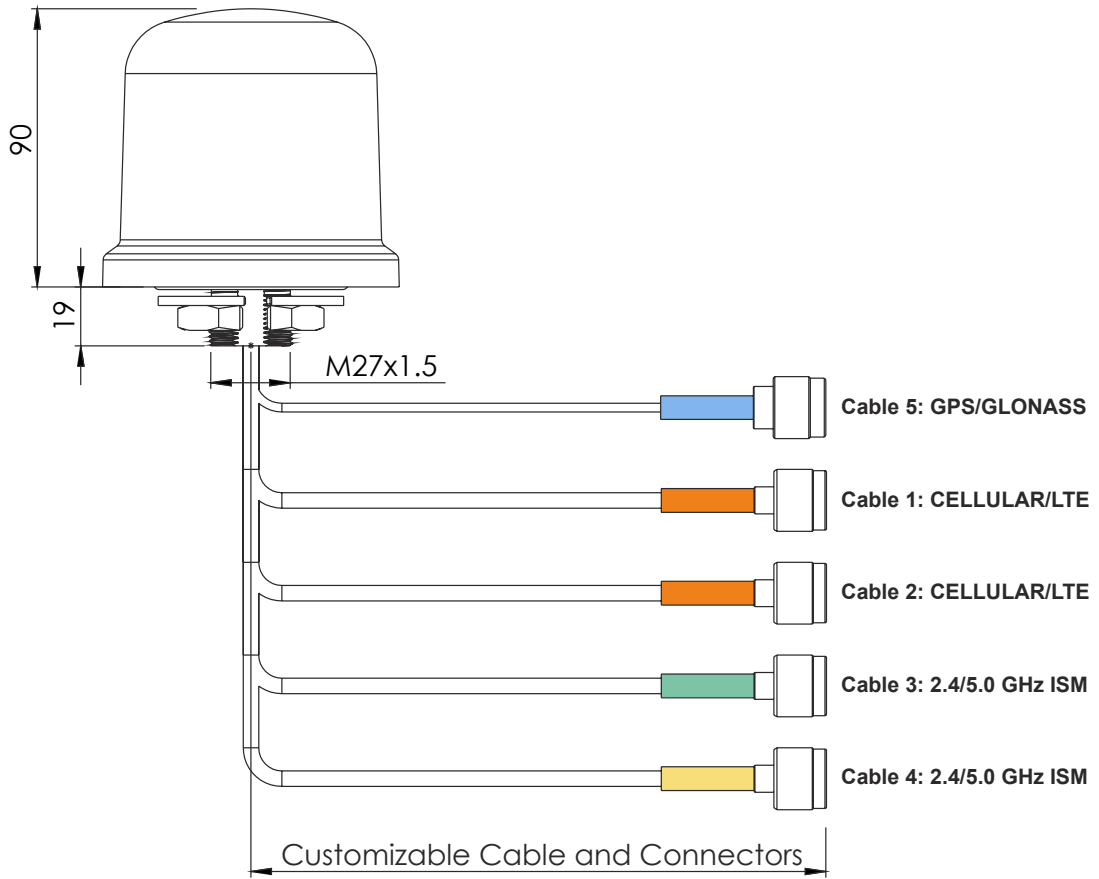


## 5. Jumper cables drawings - Optional

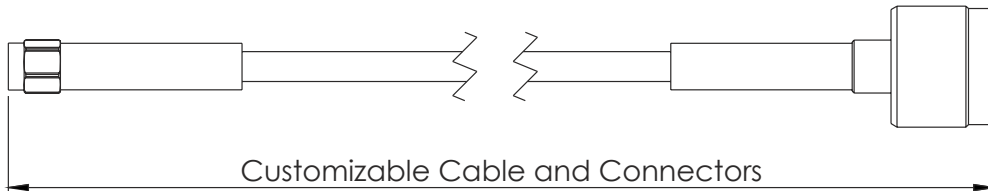


### C318N-LMR195-C91N OST - 2x

Cable 1 and 2: CELLULAR/LTE - Shrink tube Orange d6,4




### C318N-LMR195-C91N BST

Cable 5: GPS/GLONASS - Shrink tube Light blue d6,4




### C318N-LMR195-C151N GST

Cable 3: 2.4/5.0 GHz ISM - Shrink tube green d6,4



### C318N-LMR195-C151N YST

Cable 4: 2.4/5.0 GHz ISM - Shrink tube yellow d6,4



## 5. Antenna Images

