


MP203-5-D-L

Screwless terminal block stackable - Right side - Pitch 5mm - 3 Poles

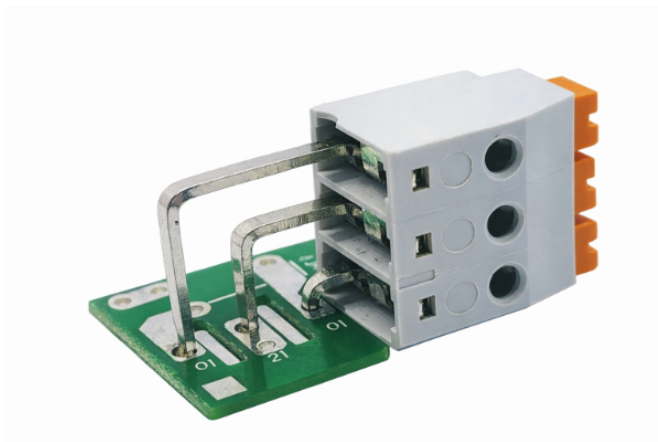

GENERAL INFORMATION

Pitch	5 mm
Height	15.1 mm
Depth	10.3 mm
Dimensional class	Media
Wire section	2.5 mm ² / 14 AWG
Clamp opening size	-
Wire stripping	max 9,5 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	16 A
Voltage	450 V
impulse voltage	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw Type	n/a
Recommended torque	-

APPROVALS DATA

			
Current	-	-	-
Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
Scip Number	-

POLES	NAME	3DFILE
03	MP203-5-D-L	Click here to download the file

DIMENSIONAL IMAGE

