


# Quectel RG620T Series

## IoT/ eMBB-Optimized 5G Sub-6 GHz LGA Module

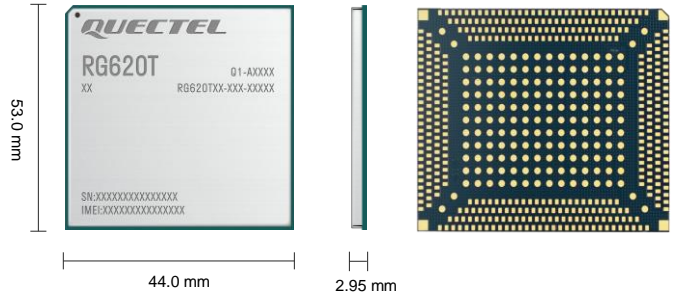

Quectel RG620T is a series of 5G Sub-6 GHz LGA modules optimized specially for IoT/ eMBB applications. Adopting the 3GPP Release 16 technology, the module supports the 5G modes of both NSA and SA and the deployment of Option 3x, 3a, 3, and 2. It also supports 4G or 3G.

RG620T series are industrial-grade for industrial and commercial applications only.

The module integrates a multi-constellation GNSS receiver that supports GPS, GLONASS, BDS, Galileo and QZSS. It helps to simplify the product design and can achieve high-precision, fast, and dependable positioning.

RG620T series have a quad-core 2.2 GHz CPU and integrate network and VPN accelerators, which extends the applicability of the module to a wide range of eMBB and IoT applications such as 5G router, CPE, MiFi, industrial router, and home gateway.



### Key Features

- ✓ Sub-6 GHz 5G module with LGA form factor, optimized for IoT and eMBB applications
- ✓ Both NSA and SA modes supported
- ✓ 5G 4CA supported
- ✓ Multi-mode network coverage, compatible with 4G network (Cat 19)
- ✓ Transmission Mode 9 (TM9) supported, increased spectral efficiency and improved performance
- ✓ Multi-constellation GNSS receiver available for applications requiring fast and accurate fixes in any environment



5G Sub-6 GHz Bands Supported



Max. 1.6 Gbps (DL)  
Max. 211 Mbps (UL)



Multi-Constellation GNSS



Embedded Abundant Protocols



LGA Form Factor



USB 3.1/ PCIe 4.0 Super Speed Interface



VoLTE/ VoNR (Optional)



Quectel Enhanced API

# Quectel RG620T Series

5G Sub-6	RG620T-NA	RG620T-EU
Region/Operator	North America	EMEA/ APAC <sup>①</sup> / Brazil
Dimensions (mm)	44.0 × 53.0 × 2.95	44.0 × 53.0 × 2.95
Temperature Range		
Operation Temperature	-30 °C to +70 °C	30 °C to +70 °C
Extended Temperature	-40 °C to +85 °C	-40 °C to +85 °C
Frequency Band		
	NR NSA	n2/ 5/ 7/ 12/ 13/ 14/ 25/ 26/ 30/ 38/ 41/ 48/ 66/ 70/71/ 77/ 78
	NR SA	n1/ 3/ 5 (71 <sup>②</sup> )/ 7/ 8/ 20/ 28/ 38/ 40/ 41/ 75/ 76/ 77/ 78
	NR SA	n2/ 5/ 7/ 12/ 13/ 14/ 25/ 26/ 29/ 30/ 38/ 41/ 48/ 66/ 70/71/ 77/ 78
	NR SA	n1/ 3/ 5 (71 <sup>②</sup> )/ 7/ 8/ 20/ 28/ 38/ 40/ 41/75/ 76/ 77/ 78
5G	DL CA	DL 4CA/ UL 2CA
	DL CA	DL 4CA/ UL 2CA
	DL 4 × 4 MIMO	n2/ 5/ 7/ 12/ 13/ 14/ 25/ 26/ 30/ 38/ 41/ 48/ 66/ 70/ 71/ 77/ 78
	DL 4 × 4 MIMO	n1/ 3/ 5 (71 <sup>②</sup> )/ 7/ 8/ 20/ 28/ 38/ 40/ 41/ 77/ 78
	UL 2 × 2 MIMO	n38/ 41/ 48/ 77/ 78
	UL 2 × 2 MIMO	n38/ 40/ 41/ 77/ 78
	LTE-FDD	B2/ 4/ 5/ 7/ 12 (17)/ 13/ 14/ 25/ 26/ 29/ 30/ 66/ 71
	LTE-FDD	B1/ 3/ 5 (71 <sup>②</sup> )/ 7/ 8/ 20/ 28/ 32
	LTE-TDD	B38/ 41/ 42/ 43/ 48
	LTE-TDD	B38/ 40/ 41/ 42/ 43
LTE	LAA	B46
	LAA	B46
	DL 4 × 4 MIMO	B2/ 4/ 5/ 7/ 12 (17)/ 13/ 14/ 25/ 26/ 30/ 38/ 41/ 42/ 43/ 48/ 66/ 71
	DL 4 × 4 MIMO	B1/ 3/ 5 (71 <sup>②</sup> )/ 7/ 8/ 20/ 28/ 38/ 40/ 41/ 42/ 43
UMTS	WCDMA	-
	WCDMA	B1/ 5/ 8
GNSS	GPS/ BDS/ GLONASS/ Galileo/ QZSS, L1 + L5	GPS/ BDS/ GLONASS/ Galileo/ QZSS, L1 + L5
Certification		
Carrier (Based on Carrier's RFP)	America: T-Mobile <sup>③</sup> / Verizon <sup>③</sup> / AT&T <sup>③</sup>	Europe: Deutsche Telekom <sup>③</sup> / British Telecom <sup>③</sup> France: Orange <sup>③</sup>
Regulatory	Global: GCF* North America: PTCRB* America: FCC Canada: IC	Global: GCF* Europe: CE Australia/New Zealand: RCM
Others	RoHS	RoHS
Data Rate (Max.)		
5G SA Sub-6 GHz	7.01 Gbps (DL)/ 2.5 Gbps (UL)	7.01 Gbps (DL)/ 2.5 Gbps (UL)
5G NSA Sub-6 GHz	5.67 Gbps (DL)/ 1.46 Gbps (UL)	5.67 Gbps (DL)/ 1.46 Gbps (UL)
LTE	1.6 Gbps (DL)/ 211 Mbps (UL)	1.6 Gbps (DL)/ 211 Mbps (UL)
DC-HSPA+	-	42.2 mbps (DL)/ 11.5 mbps (UL)
Interface		
Antenna	Cellular: × 8 GNSS: × 1	Cellular: × 8 GNSS: × 1
(U)SIM	× 2 (DSSS)	× 2 (DSSS)
UART	× 3	× 3
USB 3.1/2.0	USB 3.1 Gen2 × 1, USB 2.0 × 1	USB 3.1 Gen2 × 1, USB 2.0 × 1
USXGMII	× 2	× 2
PCIe	PCIe 4.0 × 1, PCIe 3.0 × 2	PCIe 4.0 × 1, PCIe 3.0 × 2
PCM	× 2	× 2
SPI	× 3	× 3
I2C	× 4	× 4
ADC	× 7	× 7
SDIO	× 1	× 1
DBI	× 1	× 1

## Note:

- ①: Exclude China/Japan.
- ②: Optional.
- ③: To Be Determined.
- \* : Under development/planned/in progress.

# Quectel RG620T Series

5G Sub-6	RG620T-NA	RG620T-EU
<b>Voice</b>		
<b>Voice</b>	Digital Audio and VoLTE/ VoNR (Voice over LTE/ New Radio) <sup>①</sup>	Digital Audio and VoLTE/ VoNR (Voice over LTE/ New Radio)
<b>Enhanced Feature</b>		
<b>DTMF</b>	●	●
<b>FOTA</b>	●	●
<b>(U)SIM Card Detection</b>	●	●
<b>Electrical/ RF Feature</b>		
<b>Power Supply</b>	3.3–4.4 V, typical 3.8 V	3.3–4.4 V, typical 3.8 V
<b>Power Consumption</b>	135 uA @ Power down 6 mA @ Sleep 145 mA @ Idle (USB connected)	135 uA @ Power down 6 mA @ Sleep 145 mA @ Idle (USB connected)
<b>Transmit Power</b>	Class 3 (23 dBm ±2 dB) for LTE-FDD bands Class 3 (23 dBm ±2 dB) for LTE-TDD bands Class 2 (26 dBm +2/ -3 dB) for LTE HPUE B38/ 41 Class 3 (23 dBm ±2 dB) for 5G NR bands Class 2 (26 dBm +2/ -3 dB) for 5G NR HPUE n38/ 41/ 77/ 78 Class 1.5 (29 dBm +2/ -3 dB) for 5G NR HPUE n41/ 77/ 78	Class 3 (23 dBm ±2 dB) for WCDMA bands Class 3 (23 dBm ±2 dB) for LTE-FDD bands Class 3 (23 dBm ±2 dB) for LTE-TDD bands Class 2 (26 dBm +2/ -3 dB) for LTE HPUE B41 Class 3 (23 dBm ±2 dB) for 5G NR bands Class 2 (26 dBm +2/ -3 dB) for 5G NR HPUE n41/ 77/ 78 Class 1.5 (29 dBm +2/ -3 dB) for 5G NR HPUE n41/ 77/ 78

**Note:**

- ①: Optional.
- : Supported.