


PDSVxx-10,16-V euroclamp

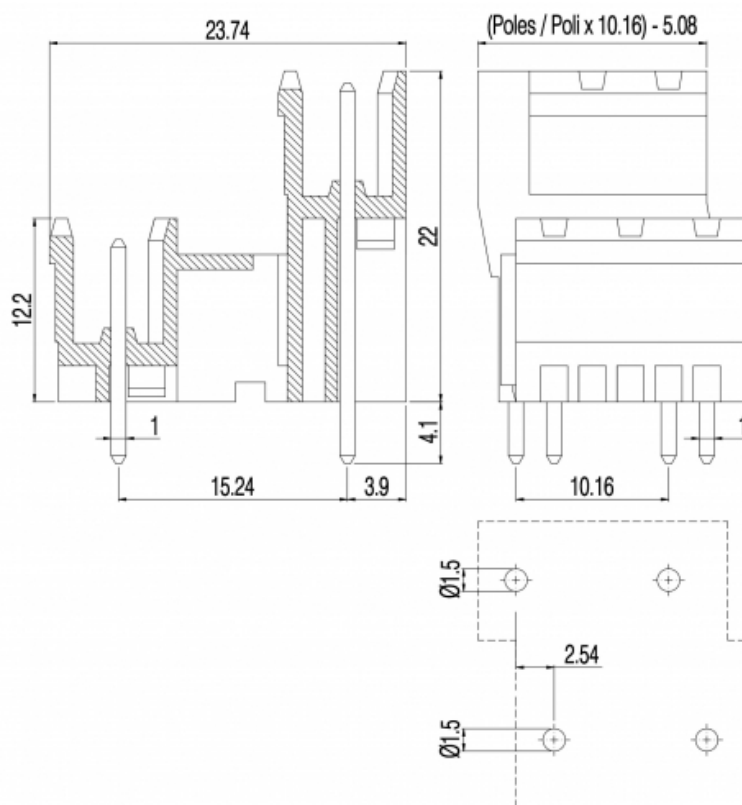

Male plug-in connector - Vertical - Dual row - Staggered - Modular version - Pitch 10,16mm - 01÷02 poles

GENERAL INFORMATION

pitch:	10,16 mm
housing height:	22,00 mm
housing depth:	23.74 mm
dimensional class:	medium
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	15A
voltage:	500V
impulse voltage:	6 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



EN 61984

current:	15A
voltage:	500V
FILE:	CA02.04178



EN 61984

15A
500V
40005779



UL 1059

12A factory / 12A field
600V
E178356

MATERIALS

housing:	PA - UL 94 V0
----------	---------------

AVAILABLE COLOURS

screw:
clamp/spring:
terminal:

n/a



n/a

other colours:

upon request

Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
01	PDSV01-10,16-V	N/A	N/A	N/A
02	PDSV02-10,16-V	N/A	N/A	N/A