

## Data sheet

734-435

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN  
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING  
WITHOUT SUPPORT**



## Technical data

Package size 100 pieces.

Pin spacing from	3.81 mm
Pin spacing from	0.15 in
pole count	5
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	6.23 g
Color	orange
Height	23 mm
Height	0.906 in
Width	21.14 mm
Width	0.832 in
Depth	16.8 mm
Depth	0.661 in

---

Data sheet

734-435

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN  
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING  
WITHOUT SUPPORT**

---

Approval	Voltage	Current	Approval number	Notes
CCA	250	10	123898-02	
CCA	250	10	NL5641	
KEMA	250	10	2077592.02	

---

**Data sheet**

734-435

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN  
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING  
WITHOUT SUPPORT**

---

**Accessories****Item number**

CODING KEY TO BE SNAPPED ABOVE BOTTOM LEVEL

734-400


CODING KEY TO BE SNAPPED ABOVE TOP LEVEL

734-130

## Data sheet

734-435

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN  
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING  
WITHOUT SUPPORT**

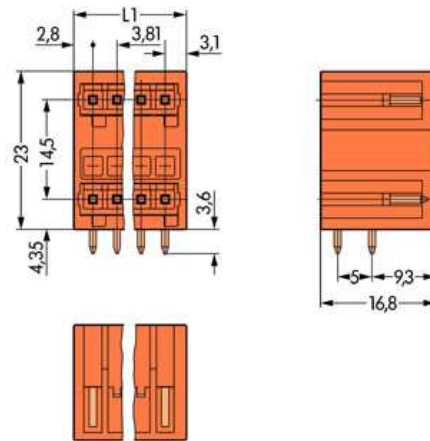

---

Data sheet

734-435

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN  
PIN SPACING 3.81 MM / 0.15 IN 100% PROTECTED AGAINST MISMATING  
WITHOUT SUPPORT**

---

Diameter of drilled hole:  $1,4^{+0,1}$  mm

$L = (\text{No. of poles} - 1) \times \text{pin spacing} + 5,9$  mm