

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® FL	14.11.2013

The seal profiles enable many problems to be solved
Several flat and round cables can be fed through at the same time
Through the internal conical contour in the upper part of the housing, the sealing inserts are pressed onto the cable



Robust

Application range

Cable flange that can be used universally, mainly for large flat cables.

Lifts

Conveyor systems

Crane and conveying machinery

Power chains

Note

When assembled professionally and properly, the protection class of IP 65 can be reached

For suitable flat cables, refer to ÖLFLEX® LIFT F for indoor applications or ÖLFLEX® CRANE F for outdoor applications

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Material:

Body: aluminium, special untreated alloy

Screws and spring washers: zinc-plated steel


Seal: NBR

Protection rating:

IP 65

Temperature range:


-20°C to +100°C

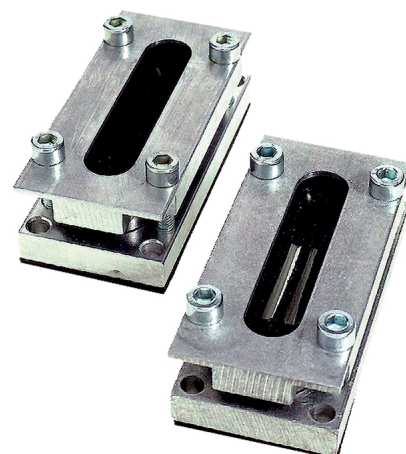

Product Management	Document: LAPP_PRO1084EN.pdf	1 / 3
--------------------	------------------------------	-------

Part number	Article designation / size	Cable pass length x width in mm	Dimensions: L x W x H (mm)	Pieces / PU
SKINDICHT® FL				
52008010	FL 1	70 x 15 + 63 x 7	45 x 35 x 95	1
52008020	FL 2	49 x 4,5	45 x 35 x 95	1
52008030	FL 3	49 x 4,5 + 49 x 4,5 (49 x 11,5)	45 x 35 x 95	1
52008040	FL 4	63 x 12,0 (+0,2)	45 x 35 x 95	1
52008050	FL 5	70 x 15	45 x 35 x 95	1

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	SKINDICHT® FL	14.11.2013

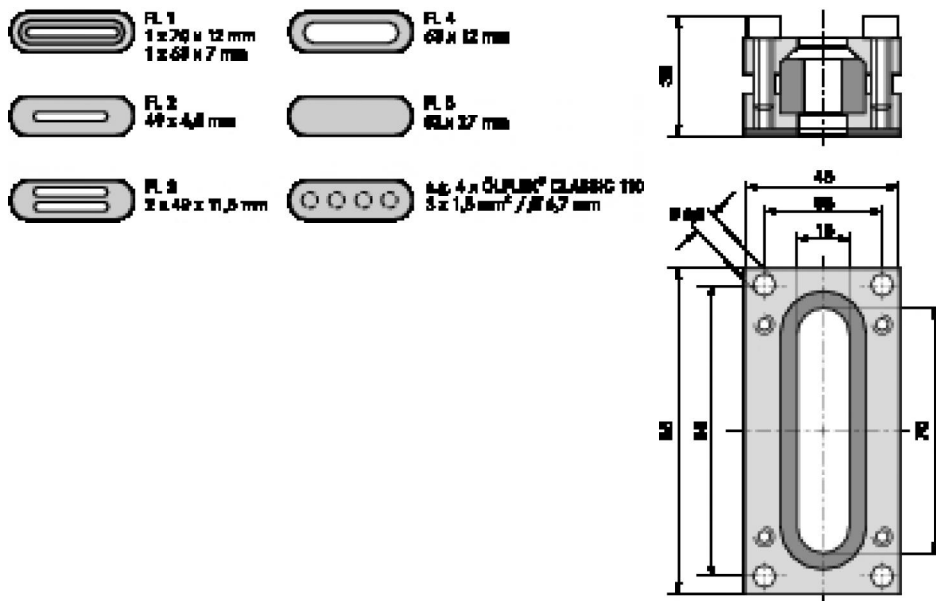

Product Management	Document: LAPP_PRO1084EN.pdf	3 / 3
--------------------	------------------------------	-------