
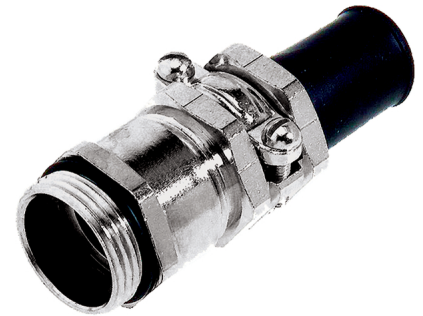



U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SKINDICHT® SR</b>	29.11.2013

Reliable bending and anti-kink protection  
 High strain relief  
 Robust  
 For cables with large outer diameters  
 High degree of protection



Wide clamping range



Optimum strain relief



Robust

### Application range

Cables for electrical appliances and machinery that are moved under normal use must be protected against excessive bending as required in accordance with VDE 0700-1

Handheld device  
 Portable equipment  
 Building sites  
 Moving machine parts

### Design

PG connection thread

### Note

Counter nut to be used: SKINDICHT® SM  
 For EMC version, refer to SKINDICHT® SRE

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

### Technical Data


Caution:	The installation dimensions can be found in appendix T21
On request:	Available with long connection thread
Material:	Body: nickel-plated brass O-ring: NBR Anti-kink protection: CR
Protection rating:	IP 65
Temperature range:	-20°C to +80°C


Product Management	Document: LAPP_PRO1089EN.pdf	1 / 3
--------------------	------------------------------	-------

## SKINDICHT® SR

29.11.2013

Part number	Article designation / size	Clamping range ØF (mm)	Max. fitting size for installation (mm)	SW1/SW2 mm	Overall length/ C (mm)	Thread length/ D (mm)
SKINDICHT® SR						
52000990	SR 07/05	3,5 - 5	23	14 / 15	50.0	5.0
52001000	SR 09/07	5,5 - 7	25	17 / 17	52.0	6.0
52001010	SR 11/07	5,5 - 7	28	20 / 20	56.0	6.0
52001020	SR 11/09	7,5 - 9	28	20 / 20	56.0	6.0
52001030	SR 13/09	7,5 - 9	32	22 / 22	62.0	6.5
52001040	SR 13/11	9 - 11	32	22 / 22	62.0	6.5
52001050	SR 13/13	11 - 13	32	22 / 22	62.0	6.5
52001060	SR 16/13	11,5 - 13	35	24 / 24	67.0	6.5
52001070	SR 16/15	13 - 15	35	24 / 24	67.0	6.5
52001080	SR 21/15	13,5 - 15	46	30 / 30	79.0	7.0
52001090	SR 21/17	15 - 17	46	30 / 30	79.0	7.0
52001100	SR 21/19	17 - 19	46	30 / 30	79.0	7.0
52001110	SR 21/20	18 - 20	46	30 / 30	79.0	7.0
52001120	SR 29/20	18 - 20	59	40 / 41	91.0	8.0
52001130	SR 29/23	21 - 23	59	40 / 41	91.0	8.0
52001140	SR 29/25	23 - 25	59	40 / 41	91.0	8.0
52001150	SR 36/26	23 - 26	70	50 / 50	110.0	9.0
52001160	SR 36/30	27 - 30	70	50 / 50	110.0	9.0
52001170	SR 36/33	30 - 33	70	50 / 50	110.0	9.0
52001180	SR 36/35	32 - 35	70	50 / 50	110.0	9.0
52001190	SR 42/35	32 - 35	75	57 / 57	114.0	10.0
52001200	SR 42/38	35 - 38	75	57 / 57	114.0	10.0
52001210	SR 42/40	36 - 40	75	57 / 57	114.0	10.0
52001220	SR 48/40	36 - 40	83	64 / 64	119.0	10.0
52001230	SR 48/44	40 - 44	83	64 / 64	119.0	10.0

U.I. Lapp GmbH	<b>PRODUCT INFORMATION</b>	
	<b>SKINDICHT® SR</b>	29.11.2013

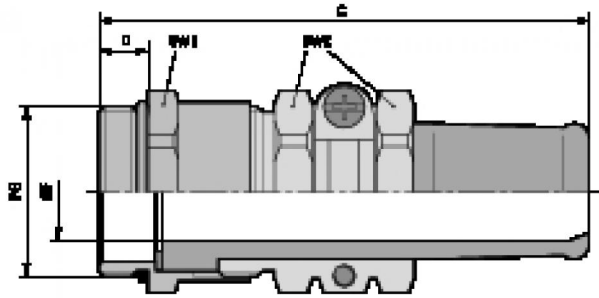

Product Management	Document: LAPP_PRO1089EN.pdf	3 / 3
--------------------	------------------------------	-------