

2J2115B-433-B05H

433 MHz ISM Wall Mount

Key Features

433 MHz ISM

- 433-435 MHz

Wall Mount

High Performance

Ground Plane Independent

Customized Cable and Connector

Dimensions 325 × 36 × 155 (220 × Ø 16) mm

Certificates: IP67



1. Antenna and electrical specifications

Parameters	433 MHz ISM Antenna
Standards	ISM, SIGFOX, LoRa
Band (MHz)	433 MHz
Frequency (MHz)	433-435
Return Loss (dB)	~-9.5
VSWR	~2.0:1
Efficiency (%)	~53.0
Peak Gain (dBi)	~2.4
Average Gain (dB)	~-2.8
Impedance (Ohm)	50
Polarisation	Linear
Radiation Pattern	Omni-Directional
Max. Input Power (W)	25
Connector Type	Most RF Connectors (SMA-Male Standard)
Cable Length	Any Cable Length (300cm Standard)
Cable Type	Other Cables Available (RG58 Standard)

Antenna Measurement Conditions:

Free Space



200 cm RG58 Cable



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2J2115B-433-B05H
Mounting Type	Wall Mount
Dimensions (mm)	325 × 36 × 155 (220 × Ø 16)
Radome	ASA
Radome color	Black
Antenna Base	Brass
Bracket	Stainless Steel
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Substance Compliance	RoHS
Certificates	IP67


3. Antenna parameters

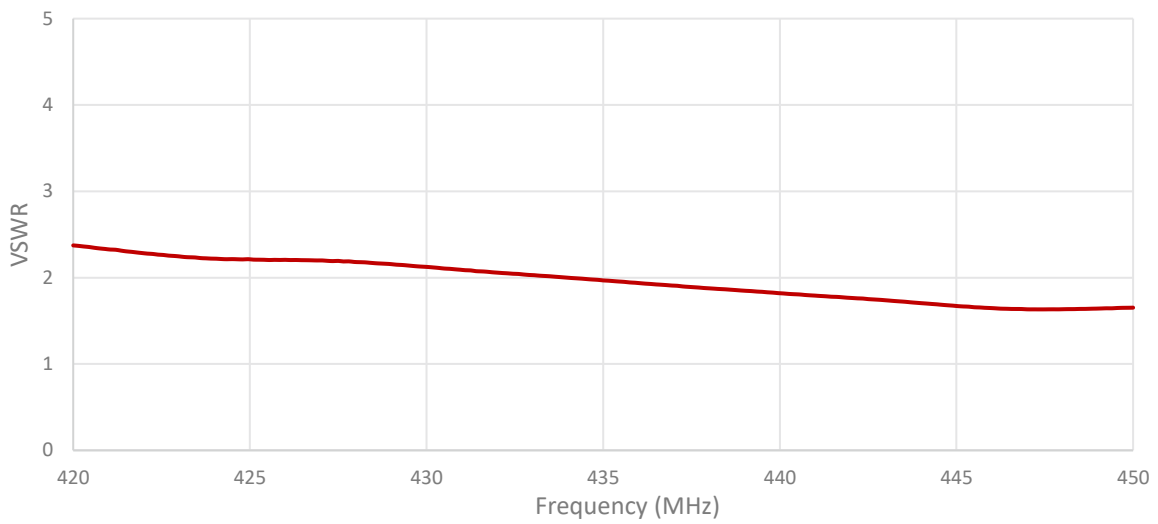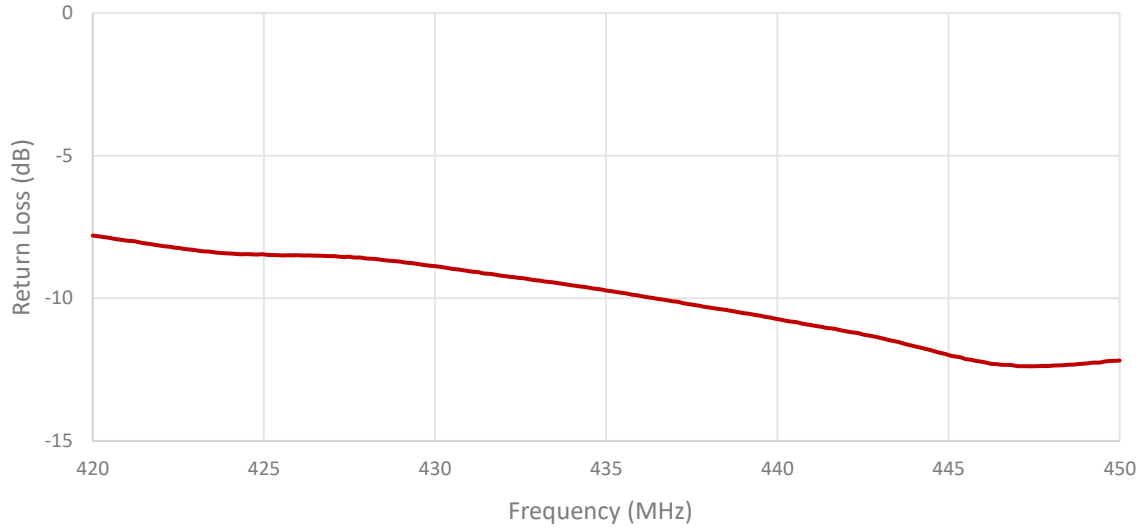

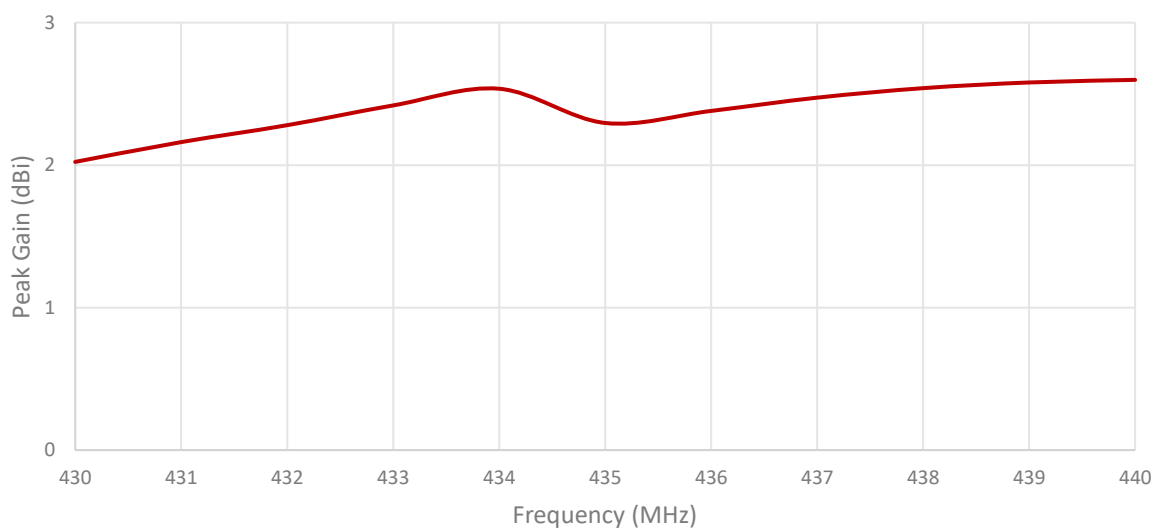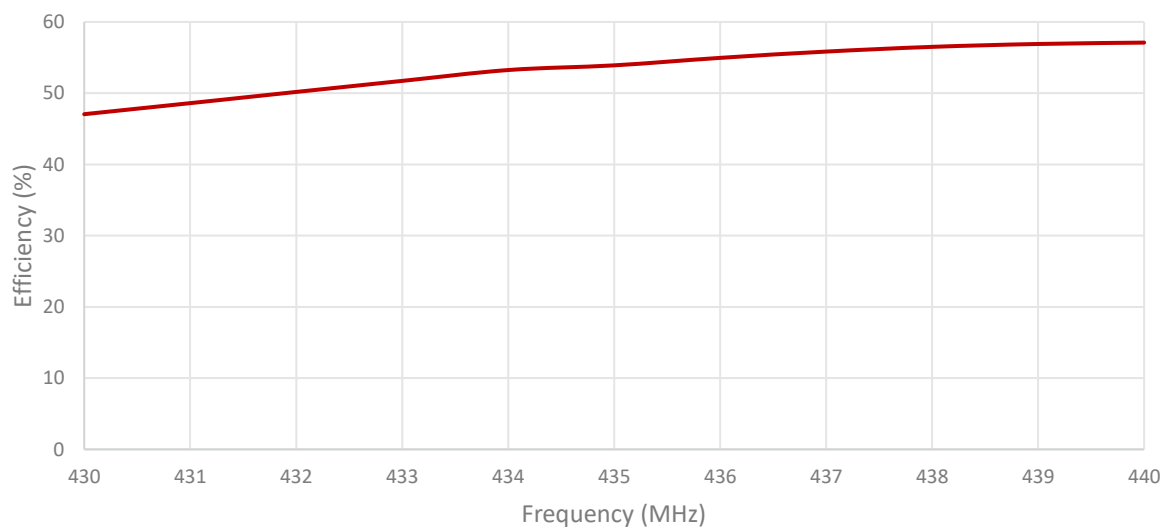

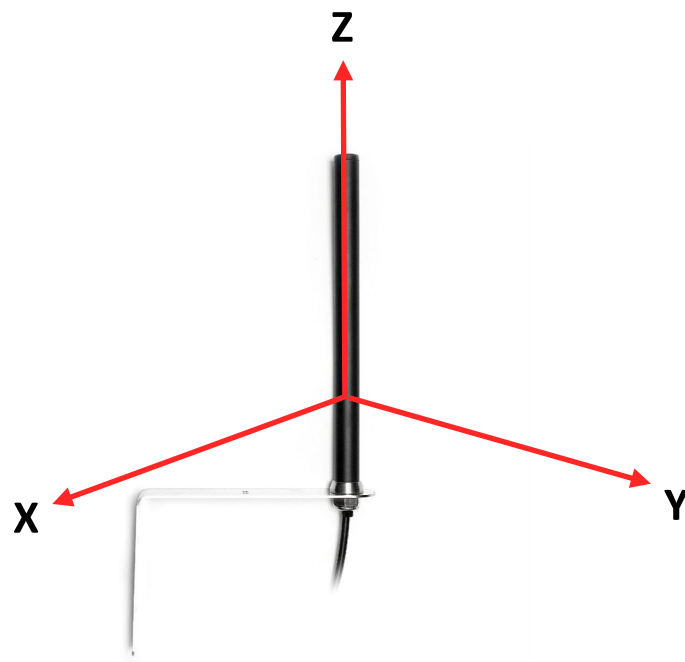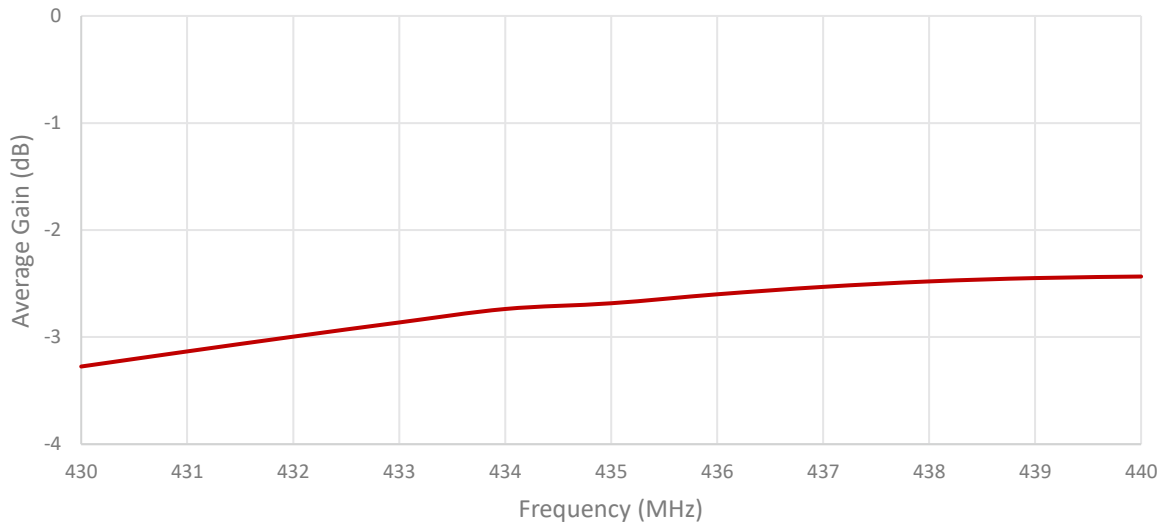


Radiation pattern reference

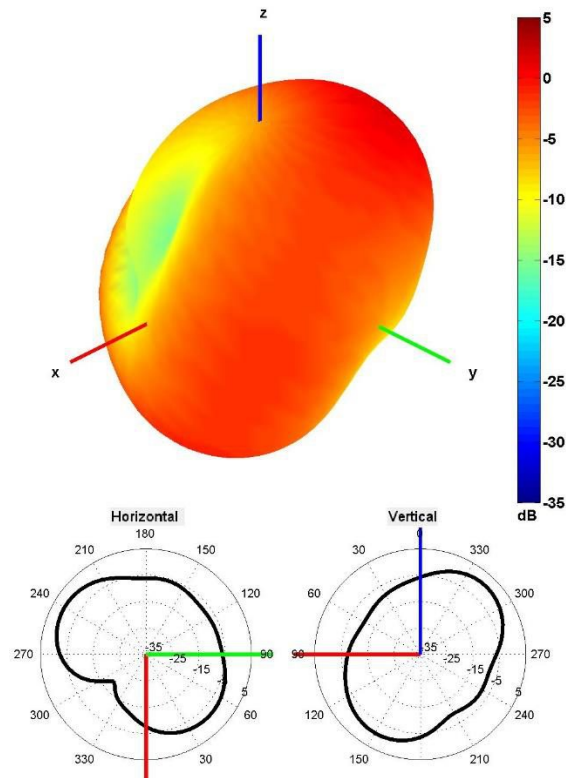

433 MHz Radiation pattern

4. Antenna drawings

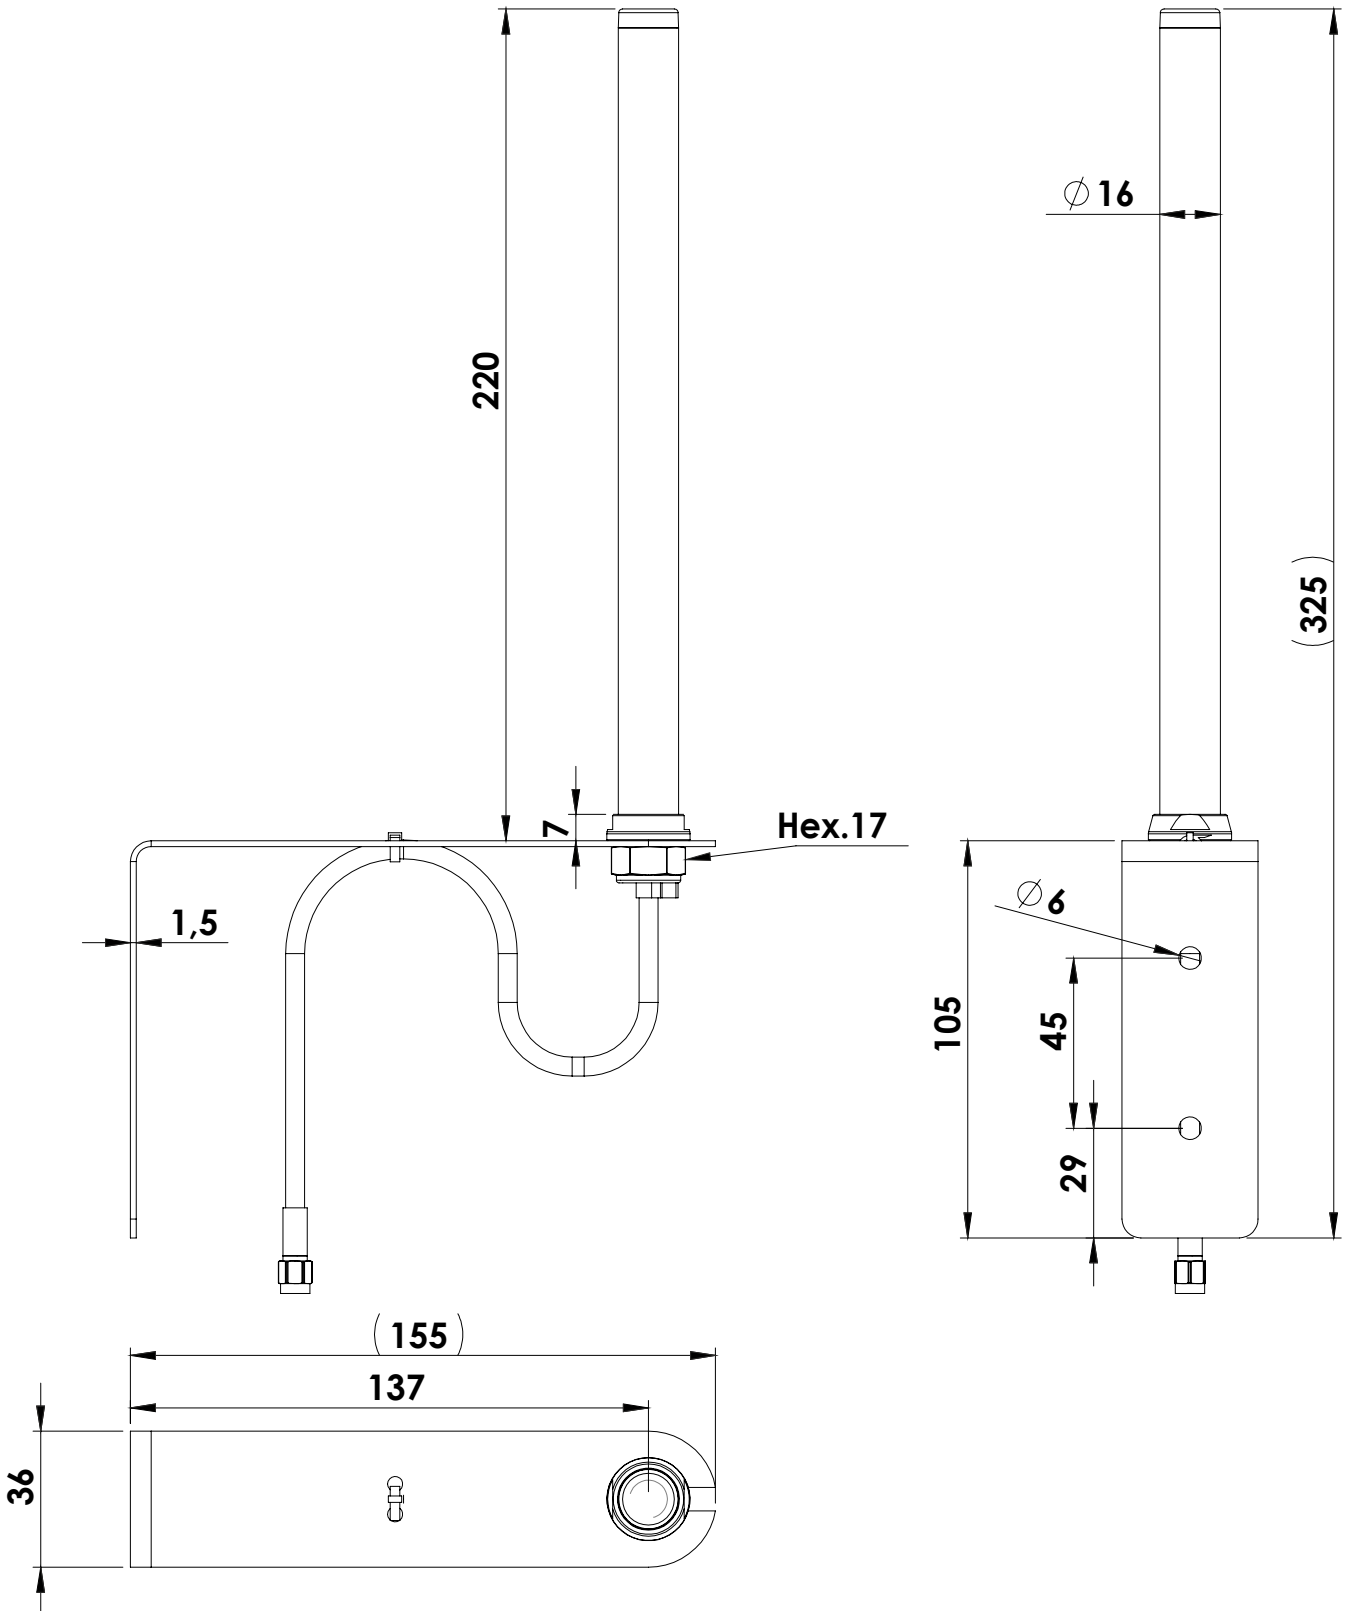

5. Antenna Images

