


Item no.: 2002-1811/1000-541
 Product description: 4-conductor fused disconnect terminal block with pivoting fuse holder for miniature metric fuses 5 x 20 mm 12 - 30 V WITH BLOWN FUSE INDICATION BY LED

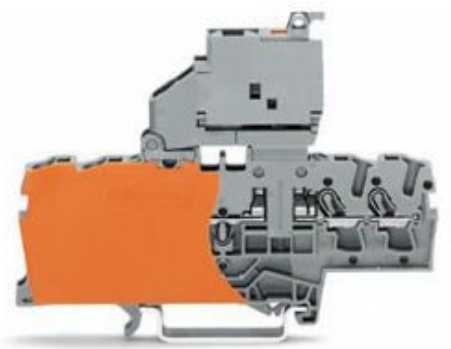

Produkt kann von Bild abweichen / product may differ

Packing unit 50 pieces

RoHS compliant

Cross section to [AWG]	12 AWG
Cross section to [AWG]	12 AWG
Cross section [AWG]	22 - 22 AWG
Width	0.244 in
Cross section [mm ²]	0.25 - 0.25 mm ²
Strip length	0.43 in
Height	2.268 in
Cross section to [mm ²]	2.5 mm ²
Depth	3.44 in
Cross section to [mm ²]	4 mm ²
Measured shock voltage	6 kV
Width	6.2 mm
Current intensity EN	6.3 A
Strip length from	10 mm
Strip length to	12 mm
Weight	15.743 g
Height	57.6 mm
Depth	87.5 mm

Measured voltage EN	250 V
No. of potentials	1
Pollution degree	3
No. of connection Points	4



Connection method	CAGE CLAMP®S Connection
Wiring method	e+f
Color	gray
Wiring type	Front-entry
Customs Tariff No.	85369085
Country of Origin	Deutschland
Safety information 1	The nominal voltage and nominal current are defined by the indicator lamp or the fuse.

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected