



U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® SR-M	29.11.2013

Reliable bending and anti-kink protection
 High strain relief
 Robust
 For cables with large outer diameters
 High degree of protection



Mechanical resistance



Optimum strain relief

Application range

Cables for electrical appliances and machinery that are moved under normal use must be protected against excessive bending as required in accordance with VDE 0700-1

Handheld device
 Portable equipment
 Building sites
 Moving machine parts

Design

Metric connection thread acc. to EN 50262

Note

Counter nut to be used: SKINDICHT® SM-M

For EMC version, refer to SKINDICHT® SRE-M

Example description: SR-M 12/7/512 = metric connection thread7 = PG function thread5 = clear opening of seal

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data

Caution:

The installation dimensions
 can be found in appendix T21

On request:

Available with long connection thread

Material:

Metal parts: nickel-plated brass
 O-ring: NBR
 Anti-kink protection: CR/NBR

Protection rating:

IP 65

Temperature range:


-20°C to +80°C


Product Management	Document: LAPP_PRO1011EN.pdf	1 / 3
--------------------	------------------------------	-------

SKINDICHT® SR-M

29.11.2013

Part number	Article designation / size	Clamping range ØF (mm)	Max. fitting size for installation (mm)	Function thread PG	SW1/SW2 mm	Overall length/ C (mm)	Thread length/ D (mm)	Clear opening F (mm)
SKINDICHT® SR-M								
52106410	12 x 1,5	4 - 5	23	7	14 / 15	49.0	5.0	5
52106420	16 x 1,5	5,5 - 7	25	9	18 / 17	50.0	5.0	7
52106430	20 x 1,5	5,5 - 7	28	11	22 / 20	55.0	6.0	7
52106440	20 x 1,5	7,5 - 9	28	11	22 / 20	55.0	6.0	9
52106450	20 x 1,5	7,5 - 9	32	13.5	22 / 22	60.0	6.0	9
52106460	20 x 1,5	9 - 11	32	13.5	22 / 22	60.0	6.0	11
52106470	20 x 1,5	11 - 13	32	13.5	22 / 22	60.0	6.0	13
52106480	20 x 1,5	12 - 13	35	16	24 / 24	65.0	6.0	13
52106481	20 x 1,5	13 - 15	35	16	24 / 24	66.0	6.0	15
52106490	25 x 1,5	12,5 - 15	46	21	30 / 30	78,5	7.0	15
52106500	25 x 1,5	14 - 17	46	21	30 / 30	78,5	7.0	17
52106510	25 x 1,5	17 - 19	46	21	30 / 30	78,5	7.0	19
52106520	25 x 1,5	17 - 20	46	21	30 / 30	78,5	7.0	20
52106530	32 x 1,5	19 - 20	59	29	40 / 41	90,5	8.0	20
52106540	32 x 1,5	22 - 23	59	29	40 / 41	90,5	8.0	23
52106550	32 x 1,5	23 - 25	59	29	40 / 41	90,5	8.0	25
52106560	40 x 1,5	24 - 26	70	36	50 / 50	108.0	8.0	26
52106570	40 x 1,5	28 - 30	70	36	50 / 50	108.0	8.0	30
52106580	40 x 1,5	31 - 33	70	36	50 / 50	108.0	8.0	33
52106590	40 x 1,5	33 - 34,5	70	36	50 / 50	108.0	8.0	35
52106600	50 x 1,5	31 - 34,5	75	42	57 / 57	111.0	9.0	35
52106610	50 x 1,5	32 - 38	75	42	57 / 57	111.0	9.0	38
52106620	50 x 1,5	37 - 40	75	42	57 / 57	111.0	9.0	40
52106630	63 x 1,5	32 - 40	83	48	66 / 64	118.0	10.0	40
52106640	63 x 1,5	36 - 44	83	48	66 / 64	118.0	10.0	44

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® SR-M	29.11.2013

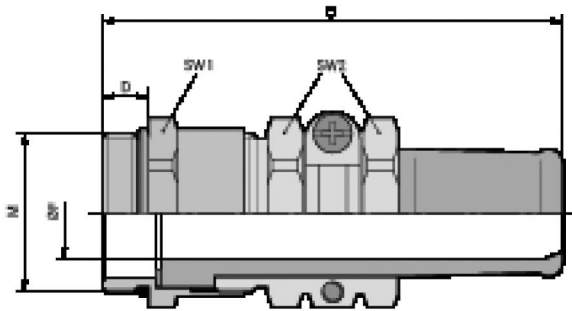

Product Management	Document: LAPP_PRO1011EN.pdf	3 / 3
--------------------	------------------------------	-------