Fieldbus couplers ▸ Modbus TCP; ECO

750-362

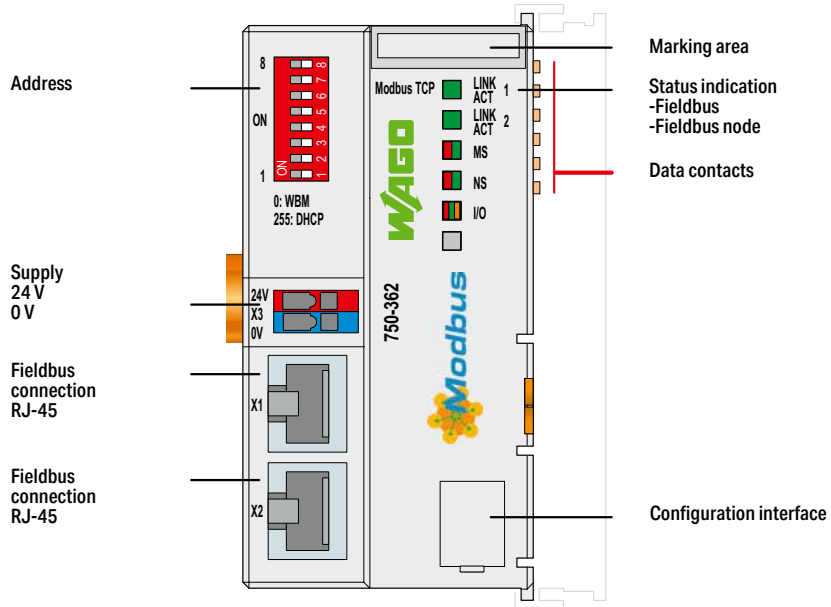

Version	Standard	BootP is preset
Item no.	750-362	750-362/000-001
Order Text	FC Modbus TCP; G4	

Technical data		
Communication	Modbus (TCP, UDP)	
ETHERNET protocols	HTTP(S); BootP; DHCP; DNS; SNTP; FTP(S); SNMP	
Connection technology: communication/fieldbus	Modbus (TCP, UDP): 2 x RJ-45	
Baud rate	10/100 Mbit/s	
Transmission medium (communication/fieldbus)	Twisted pair S-UTP; 100 Ω; Cat. 5; 100 m maximum cable length	
Transmission performance	Class D per EN 50173	
Number of modules per node (max.)	250	
Input and output process image (fieldbus) max.	1020 words/1020 words	
Supply voltage (system)	24 VDC (-25 … +30 %); via pluggable connector	
Input current (typ.) at nominal load (24 V)	280 mA	
Current consumption (5 V system supply)	350 mA	
Total current (system supply)	700 mA	
Ambient temperature (operation)	0 … +55 °C	
Dimensions W x H x D	(49.5 x 96.8 x 71.9) mm	
Approvals	CE; KC; Marine; cULus OrdLoc/HazLoc; Ex ATEX/IECEx	-
For data sheet and additional information, see:	wago.com/750-362	