


CONFIDENTIAL

VERTRAULICH


THIS DRAWING IS THE EXCLUSIVE PROPERTY OF MARQUARDT. WITHOUT THEIR CONSENT IT MAY NOT BE REPRODUCED OR GIVEN TO THIRD PARTIES.


Alle Rechte bei Marquardt, auch fuer den Fall von Schutzrechtsanmeldungen. Jede Veruegungsbefugnis, wie Kopier- und Weitergaberecht, bei uns.

A	recommended cut-out for snap-in fixing (edge opposite to snap-in direction)	1	2	3	4
		wall thickness	length of cut-out	width of cut-out	
		0.75 to 1.25	19.2 -0.1	12.9+0.1	
		1.25 to 2	19.4 -0.1	12.9+0.1	
		2 to 3	19.8 -0.1	12.9+0.1	

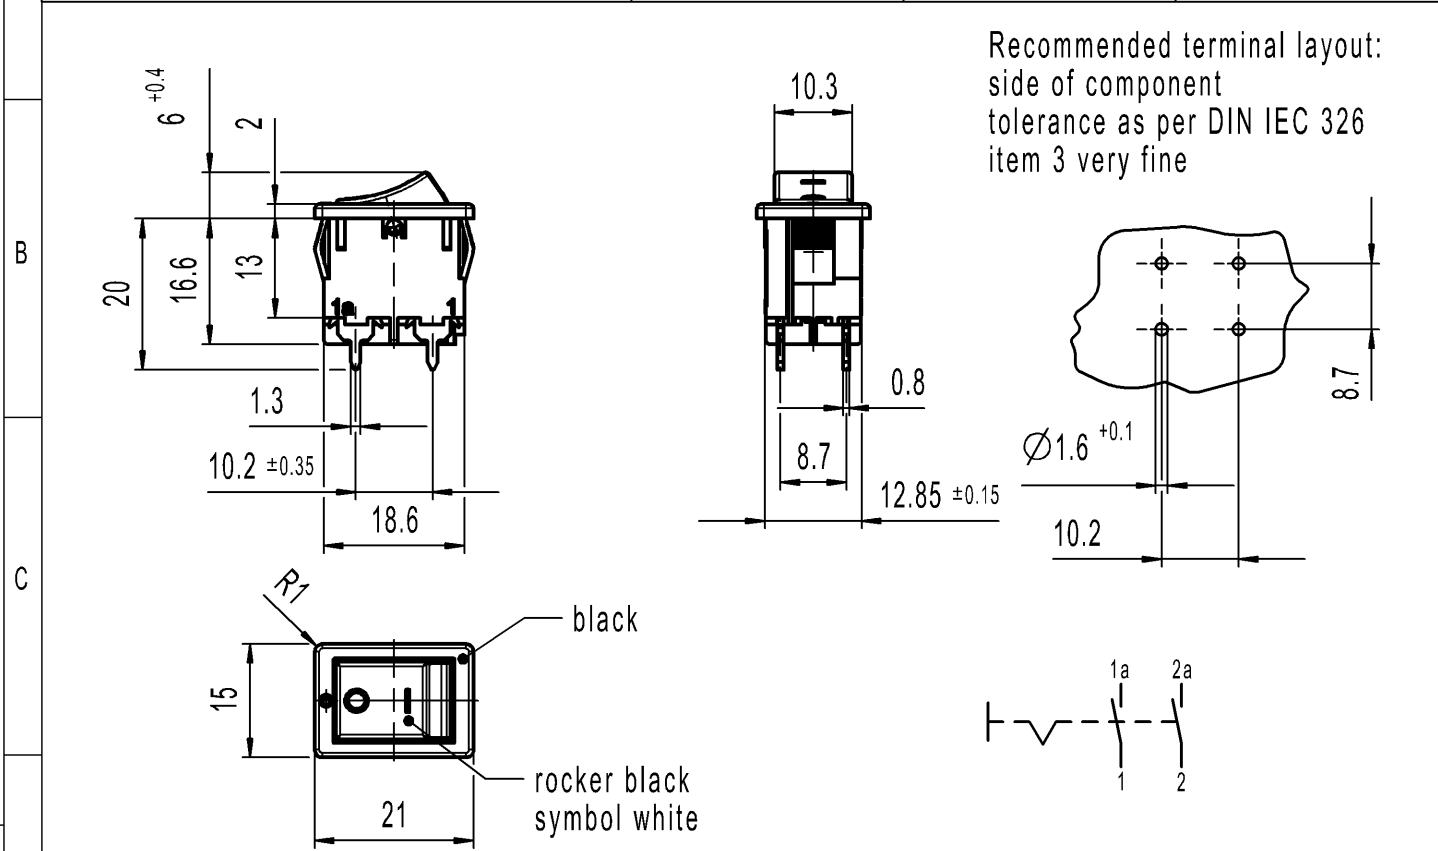


Recommended terminal layout:  
side of component  
tolerance as per DIN IEC 326  
item 3 very fine


**D** Marking  
  
 1858.

10(10)A 250Vac 5E4  
 16(10)A 250Vac 1E4  
 15 T100/55 cULus

**E** Code of manufacture: place/year/week  
 On box: Customer Part No. see variant table  
 G

**DPST**  
 Suitable for appliance of class II  
 Protected according to DIN 40 050, IP40  
 G= matching IEC 60335-1:2001 clause 30



-	-	0041.1750	1858.2204-XX
Figure	Type	Customer Part No.	Art.No.-PI
Shape and location	Angle ± 2 °	Sheet 01	Ident. K
	Edge tolerance	Format DIN A4	Document number 18582204
	Length	Projection	Index h
	Radii	Scale 1:1	Appliance Switch
		All dimensions are in millimetres	
h	141198	2022-01-13	 <b>MARQUARDT</b>
g	108404	2017-05-15	
f	47886	2006-06-23	
e	41634	2004-12-03	
Index	MEC-No.	Date (YYYY-MM-DD)	
		System NX V1872	Replacement of
		Zg.gl.Nr.v.13.06.1996	