

## Data sheet

234-208

PCB TERMINAL STRIP 2 SOLDER PINS / POLE  
PIN SPACING 2.5 MM / 0.098 IN WITH PUSH BUTTONS FRONT-ENTRY



## Technical data

Package size 220 4\*55 pieces.

Pin spacing from	2.5 mm
Pin spacing from	0.098 in
pole count	8
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	0.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	20 AWG
Voltage UL	150 V
Voltage CSA	150 V
Current UL	4 A
Current CSA	4 A
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	6 A
Weight	3.8 g
Color	grey
Wiring type	Front-entry
No. of connection Points	8
No. of potentials	8
Height	14 mm
Height	0.551 in
Width	22.2 mm

---

**Data sheet**

**234-208**

**PCB TERMINAL STRIP 2 SOLDER PINS / POLE  
PIN SPACING 2.5 MM / 0.098 IN WITH PUSH BOTTONS FRONT-ENTRY**

---

Width	0.874 in
Depth	14.4 mm
Depth	0.567 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

---

**Data sheet**

234-208

**PCB TERMINAL STRIP 2 SOLDER PINS / POLE  
PIN SPACING 2.5 MM / 0.098 IN WITH PUSH BOTTONS FRONT-ENTRY**

---

Approval	Voltage	Current	Approval number	Notes
BV	250	6	11915/A0	
CSA	150	4	154112-1465035	
CSM	250	4	017956	
DEMKO	250	6	118980ES	
DEMKO	250	4	DK96-03660	
DNV	250	4	E6998	
GL	250	4	17296-00HH	
KEMA	250	6	90.6212.01/02	
NEMKO	125	4	L87192	
RMR	250	4	99.00007.250	
RosTesT	250	4	B09523	
SEMKO	250		9043004	
UL	150	4	E45172	

---

**Data sheet**

234-208

**PCB TERMINAL STRIP 2 SOLDER PINS / POLE  
PIN SPACING 2.5 MM / 0.098 IN WITH PUSH BOTTONS FRONT-ENTRY**

---


**Accessories****Item number**

SCREWDRIVER Type 1, bar (2,5 x 0,4) mm	210-119
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 2.5MM; SERIES 233, 234, 733	249-151
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 2.5MM; SERIES 233, 234, 733	249-152
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 2.5MM; SERIES 233, 234, 733	249-153

Data sheet

234-208

PCB TERMINAL STRIP 2 SOLDER PINS / POLE  
PIN SPACING 2.5 MM / 0.098 IN WITH PUSH BUTTONS FRONT-ENTRY

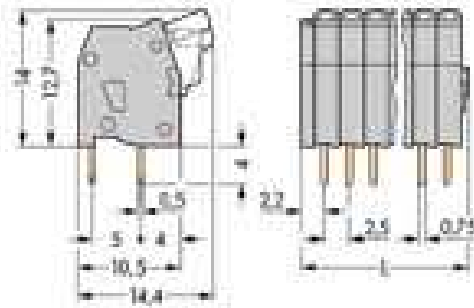

---

Data sheet

234-208

**PCB TERMINAL STRIP 2 SOLDER PINS / POLE  
PIN SPACING 2.5 MM / 0.098 IN WITH PUSH BOTTONS FRONT-ENTRY**

---

Diameter of drilled hole:  $1,1^{+0,1}$  mm

$L = (\text{No.of poles} \times \text{pin spacing}) + 2,2$  mm