


Digital output ► 24 VDC ► high-side switching ► 0.5 A



750-1504

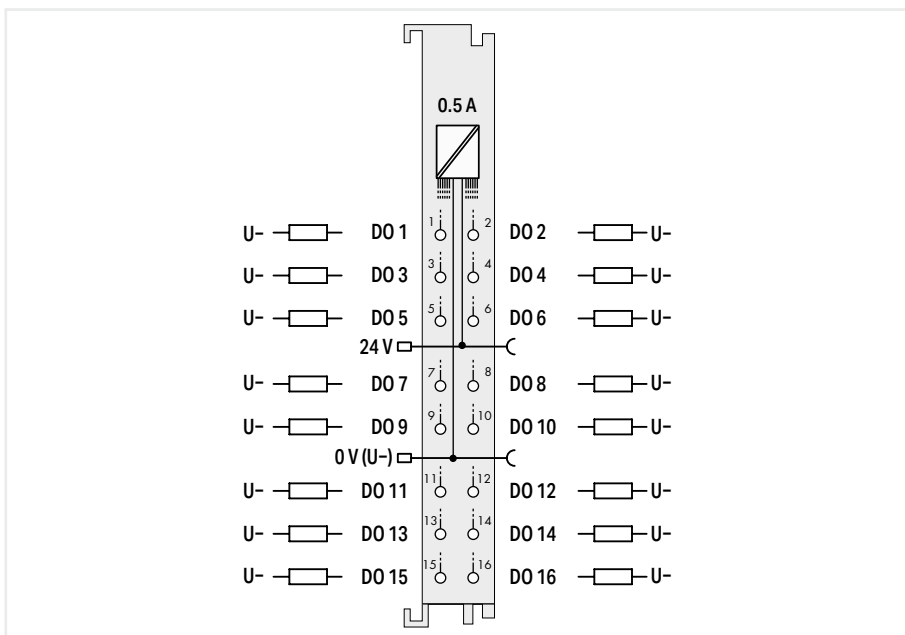

| | |
|------------------|--|
| Item description | 16-Channel Digital Output; 24 VDC; 0.5 A |
| Version | Standard with 16 connectors |
| Item no. | 750-1504 |
| Order Text | 16DO; 24 VDC; 0.5A |

| Technical data | |
|--|---|
| Pluggable connector | fixed |
| Number of digital outputs | 16 |
| Signal type | Digital |
| Signal type (voltage) | 24 VDC |
| Output characteristic | high-side switching |
| Output current per channel | 0.5 A |
| Output current | short-circuit-protected |
| Load type | Resistive, inductive, lamp load |
| Actuator connection | 16 x (1-wire) |
| Switching frequency (max.) | 1 kHz |
| Supply voltage (field) | 24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact) |
| Current consumption, field supply (module with no external load) | 29 mA |
| Current consumption (5 V system supply) | 40 mA |
| Output data width (internal) max. | 16 bits |
| Isolation | 500 V system/field |
| Ambient temperature (operation) | 0 ... +55 °C |
| Dimensions W x H x D | (12 x 100 x 69) mm |
| Approvals | CE; Marine; OrdLoc/HazLoc; ATEX/IECEX |

For data sheet and additional information, see:

wago.com/750-1504