



<b>DATA SHEET</b>	10196000
<b>EPIC® H-BE 24 SS / H-BE 24 BS</b>	Valid from: 09.07.2015

## Description

- Standard inserts with screw termination, crimp termination, cage clamp termination and Push-In termination
- The EPIC® H-BE series is suitable for applications that require a reliable connection when working with high voltages and currents



## General Characteristics

Series	H-BE 24
Version	Male/Female(Article 10197000)
Wire Protection	Yes
Number of Contacts	24 + PE
Termination Methods	Screw termination: 0.5 - 2.5 mm <sup>2</sup>
Temperature Range	-40°C to +100°C, short-term up to +125°C

## Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----

## Electrical Characteristics

Rated Voltage, IEC	500 V
Rated Voltage, UL	600 V
Rated Voltage, CSA	600 V
Rated Impulse Voltage	6 kV
Rated Current, IEC	16 A
Rated Current, UL	16 A
Rated Current, CSA	16 A
Contact Resistance	< 2 mOhm
Degree of Soiling	3

## Materials and Surfaces

Contacts	Copper alloy, hard silver-plated
Insulating Body	PC
Flammability Class according to UL 94	V0

## Approvals



UL-Approval, E-File-Number	E75770
VDE-Approval, VDE-REG.-Nr.	B437

## Standard

Product Standard	IEC 61984, UL 1977
------------------	--------------------

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB10196000EN Version: 00	Page 1 of 2
---	---------------------------------------	-------------

**Technical Drawings**

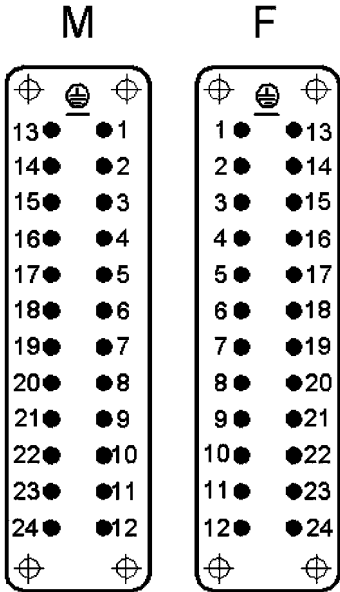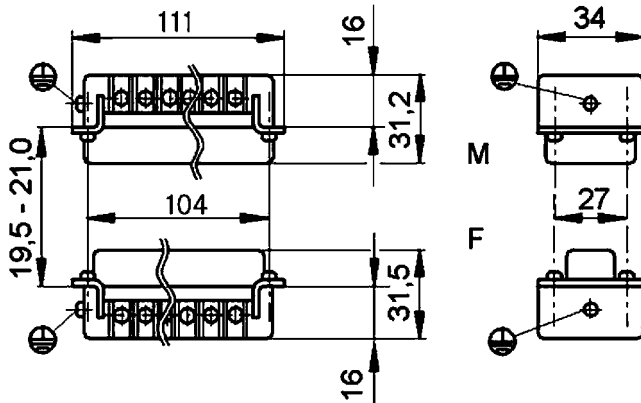

Robust



Temperature-resistant

**Info**

Multifunctional insert for versatile applications  
 Screw, crimp, cage clamp and Push-In version - freely combinable  
 Also as EPIC® H-BE 48 available

**Application range**

Mechanical engineering  
 Light & sound technology  
 Plastics industry

**Remark**

Photographs are not to scale and do not represent detailed images of the respective products.