


U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® SVRN-M	29.11.2013

High mechanical stability
Optimum strain relief




Good chemical resistance



Corrosion-resistant



Mechanical resistance



Optimum strain relief



Application range

Brass cable gland with hexagonal fitting, for fast assembly with a flat spanner.

Design

Metric connection thread acc. to EN 50262

Design

For connection thread M 50 x 1.5 and M 63 x 1.5, refer to SKINDICHT® SVRE-M

Note

Counter nut to be used: SKINDICHT® SM-M

Example order identification: SVRN-M 12 / 7 / 512 = Connection thread metric7 = Function thread PG5 = Clear width F

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Technical Data


Caution:	The installation dimensions can be found in appendix T21
On request:	Available with long connection thread
Material:	Body: nickel-plated brass Sealing ring: CR/NBR
Protection rating:	IP 54
Temperature range:	-20°C to +100°C


Product Management	Document: LAPP_PRO1005EN.pdf	1 / 3
--------------------	------------------------------	-------

SKINDICHT® SVRN-M

29.11.2013

Part number	Article designation / size	Function thread PG	SW1/SW2 mm	Overall length/ C (mm)	Thread length/ D (mm)	Clear opening F (mm)
SKINDICHT® SVRN-M						
52104800	12 x 1,5	7	14 / 13	20,6	5.0	5
52104810	12 x 1,5	7	14 / 13	20,6	5.0	6
52104820	12 x 1,5	7	14 / 13	20,6	5.0	7
52104830	16 x 1,5	9	18 / 15	21,6	5.0	7
52104840	16 x 1,5	9	18 / 15	21,6	5.0	8
52104850	16 x 1,5	9	18 / 15	21,6	5.0	9
52104860	20 x 1,5	11	22 / 18	23,6	6.0	10
52104870	20 x 1,5	11	22 / 18	23,6	6.0	11
52104880	20 x 1,5	13.5	22 / 20	25,6	6.0	11
52104890	20 x 1,5	13.5	22 / 20	25,6	6.0	12
52104900	20 x 1,5	16	24 / 22	26,6	6.0	13
52104910	20 x 1,5	16	24 / 22	26,6	6.0	14
52104920	25 x 1,5	21	30 / 28	29,6	7.0	18
52104930	32 x 1,5	29	40 / 37	32,6	8.0	27
52104940	40 x 1,5	36	50 / 47	37,6	8.0	34

U.I. Lapp GmbH	PRODUCT INFORMATION	
	SKINDICHT® SVRN-M	29.11.2013

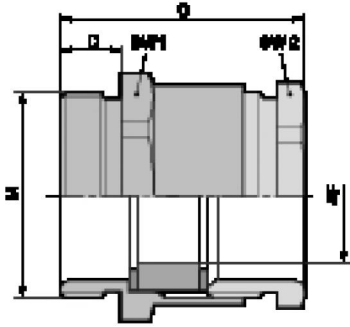

Product Management	Document: LAPP_PRO1005EN.pdf	3 / 3
--------------------	------------------------------	-------