

Data sheet

734-404

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING
WITHOUT SUPPORT**



Technical data

Package size 100 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	4
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	4.6 g
Color	light grey
Height	23 mm
Height	0.906 in
Width	16.4 mm
Width	0.646 in
Depth	16.8 mm
Depth	0.661 in

Data sheet**734-404****DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING
WITHOUT SUPPORT**

Approval	Voltage	Current	Approval number	Notes
CCA	250	10	123898-02	
CCA	250	10	NL5641	
KEMA	250	10	2077592.02	

Data sheet**734-404****DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING
WITHOUT SUPPORT**

Accessories**Item number**

CODING KEY TO BE SNAPPED ABOVE BOTTOM LEVEL

734-400


CODING KEY TO BE SNAPPED ABOVE TOP LEVEL

734-130

Data sheet

734-404

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING
WITHOUT SUPPORT**

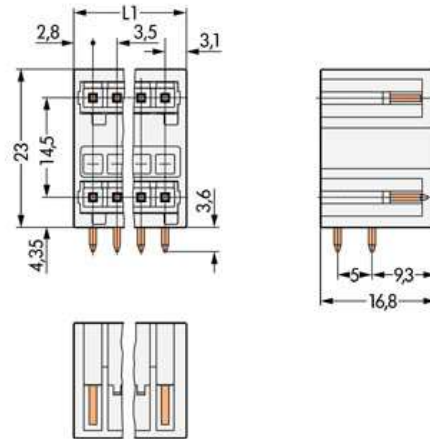

Data sheet

734-404

**DOUBLE DECK HEADERS RIGHT ANGLE SOLDER PIN, 1 X 1 MM / 0.039 X 0.039 IN
PIN SPACING 3.5 MM / 0.138 IN 100% PROTECTED AGAINST MISMATING
WITHOUT SUPPORT**

Diameter of drilled hole: $1,4^{+0,1}$ mm

$L = (\text{No. of poles} - 1) \times \text{pin spacing} + 5,9$ mm