



PIC32 Microcontroller Families

PIC32<sup>®</sup>



# Performance-Leading PIC32 Microcontrollers

Building on the heritage of Microchip Technology's world-leading 8- and 16-bit PIC® microcontrollers, the PIC32 family delivers 32-bit performance and more memory to solve increasingly complex embedded system design challenges.

## Broad Portfolio

From simple USB device connectivity to RTOS-driven graphical user interface applications with advanced audio processing, there is a PIC32 device to meet your design challenges.

- PIC32MZ Series: Up to 200 MHz/330 DMIPS, MIPS® microAptiv™ or M-Class core with DSP instructions
- PIC32MX Series: Up to 120 MHz/150 DMIPS, MIPS M4K core
- Floating Point Unit (FPU) for fast single- and double-precision math
- Memory Management Unit (MMU) for optimum embedded OS execution
- Fast interrupts and context switch
- Dual-panel Flash with live update
- 16 KB to 2 MB Flash
- 4 KB to 512 KB RAM for data and program execution
- Temperature range: -40 to 85°C; -40 to 105°C; 0 to 70°C; -40 to 125°C (planned)
- Low pin count devices with Peripheral Pin Select (PPS) for pin remapping of most digital I/O























## Industry-Leading Compatibility


Create scalable products in a consistent environment.

- Common MPLAB® X development tools
- Pin- and peripheral-compatible with 16-bit PIC MCUs
- Common software stacks across MCUs
- Common tools environment for over 1,100 PIC MCUs

## PIC32 Software Solutions Support

Get the latest updates at [www.microchip.com/harmony](http://www.microchip.com/harmony).

<b>USB</b>	USB Host, Device, On-the-Go with Class Drivers 
<b>HMI</b>	Microchip Graphics Library  MPLAB® Harmony Graphics Composer (HGC)  mTouch® Capacitive Touch Library Touch System Service Library 
<b>CAN</b>	CAN Driver and PLIB support for PIC32 
<b>Audio and Speech</b>	Audio Library for PIC32MX: Speex, ADPCM and WAV  ; MP3  ; AAC Decode  and WMA Decode  USB Audio 2.0 Device Class  ; Sample Rate Conversion (SRC) Library; PIC32 Bluetooth Audio Software Suites  ; Audio Equalizer Filter Library
<b>Connectivity</b>	Microchip TCP/IP with SSL and BSD  ; IrDA® Stack; Bluetooth® SPP Stack for PIC32  ; Wi-Fi® Software Library  ; IEEE 802.15.4 and Sub-GHz MiWi™ Development Environment
<b>Encryption</b>	Cryptographic Library 
<b>Basic Libraries</b>	File System Library  ; Floating Point Math Library  ; Peripheral Library  ; EEPROM Emulation; IEC 60730 Class B Software; Fixed Point Math Library  ; Fixed Point DSP Library 
<b>Boot Loader</b>	Serial Port Boot Loader  USB Host Boot Loader  Ethernet Boot Loader

 MPLAB Harmony Software Framework compatible.  
Additional software libraries listed in the table above are planned to be included in MPLAB Harmony.

## Fast, Easy Development

Shorten your project design cycle.

- Free MPLAB X Integrated Development Environment supporting all Microchip MCUs
- Free MPLAB XC32/XC32++ Compiler
- MPLAB Harmony Software Framework to get you started with communications, graphics, Bluetooth®, file system, audio and signal processing
- Work in a familiar environment with a broad third party ecosystem of IDEs, RTOS and debuggers
- Development kits starting at \$34.95 with free C compiler

## More Design Options

Simplify your system design through integration.

- Extensive analog and digital peripherals including 10/100 Ethernet MAC, I<sup>2</sup>C™, I<sup>2</sup>S, 10/12-bit ADCs with up to 48 analog channels, serial communications, SQI, EBI and Hi-Speed USB
- Up to 26 DMA channels
- 8/16-bit parallel master port supporting graphic interface and additional memory
- Capacitive touch for improved human interfaces with capacitive buttons or slider control

# MPLAB Harmony for PIC32

## Introduction

MPLAB Harmony is a flexible, abstracted, fully integrated firmware development environment for PIC32 microcontrollers. It enables robust framework development of interoperable RTOS-friendly libraries with quick and extensive Microchip support for third party software integration. MPLAB Harmony includes a set of peripheral libraries, drivers and system services that are readily accessible for application development. The code development format allows for maximum re-use and reduces time-to-market. It features the MPLAB Harmony Configurator (MHC) plug-in that provides a graphical way to select and configure all MPLAB Harmony components, including middleware, system services and peripherals with ease.

## Benefits

- Faster time-to-market
- Improved code interoperability
- Simplified support
- MPLAB Harmony Configurator (MHC) for enhanced user experience
- Improved 32-bit scalability
- Enhanced third party software integration

## PIC32 Software Development Tools Available with MPLAB Harmony

Applications	Operating System Abstract Layer (OSAL)	Middleware/ Software Libraries	Device Drivers	Development Software	Third Party Software
<ul style="list-style-type: none"> <li>■ Graphics applications</li> <li>■ TCP/IP applications and utilities</li> <li>■ USB applications</li> </ul>	<ul style="list-style-type: none"> <li>■ OSAL interface with "basic" and "none" implementation</li> <li>■ ThreadX</li> <li>■ embOS</li> <li>■ FreeRTOS</li> <li>■ OpenRTOS</li> <li>■ Micrium µC/OS-II</li> <li>■ Micrium µC/OS-III</li> </ul>	<ul style="list-style-type: none"> <li>■ Graphics</li> <li>■ TCP/IP</li> <li>■ USB</li> <li>■ Cryptographic libraries</li> <li>■ File systems</li> <li>■ System services</li> <li>■ Bluetooth®</li> <li>■ DSP/Math</li> </ul>	<ul style="list-style-type: none"> <li>■ ADC</li> <li>■ Ethernet media access controller</li> <li>■ Ethernet PHY interface</li> <li>■ Controllerless graphics</li> <li>■ Epson LCD controller</li> <li>■ Non-volatile memory</li> <li>■ SPI, UART, high-speed USB</li> <li>■ Timer, parallel master port</li> </ul>	<ul style="list-style-type: none"> <li>■ MPLAB® X IDE</li> <li>■ MPLAB XC32++</li> <li>■ MPLAB Harmony Configurator (MHC) Plug-In</li> <li>■ MPLAB Harmony Graphics Composer (HGC)</li> <li>■ Board Support Packages (BSP)</li> </ul>	<ul style="list-style-type: none"> <li>■ DHCP</li> <li>■ DNS</li> <li>■ Networking</li> <li>■ Security</li> <li>■ Cloud services</li> </ul>

Additional software components planned

### Application Layer

- Implements desired overall behavior
- Abstracted hardware access
- Allows for easy port across PIC32 parts

### Common System Services


- Provides common functionality to avoid duplication and conflicts
- Eliminates complex interactions and interdependencies between modules
- OSAL provides OS compatibility and interface
- Manages shared resources
- Supports low-level configuration and board support package

### Peripheral Libraries (PLIB) Layer

- Provide functional interface for Microchip PIC32 scalability
- Implements part-specific features



## MPLAB Harmony Block Diagram

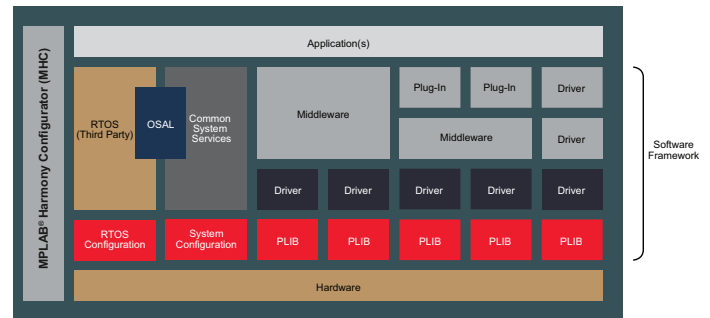


### Middleware Layer

- Implements complex libraries and protocols (USB, TCP/IP, file systems, graphics)
- Provides a highly abstracted application program interface
- Libraries are thread-safe and RTOS-ready
- Built on drivers, PLIBs, system services
- Supports third party library integration

### Device Driver Layer

- Provides highly abstracted interface to peripheral
- Controls access to the peripheral
- Manages multiple hardware instances and software clients with select drivers
- Manages peripheral state and multiple peripheral instances
- Accesses hardware via PLIB
- Supports blocking or non-blocking code


# Inside the MIPS® M4K Core PIC32 MCU

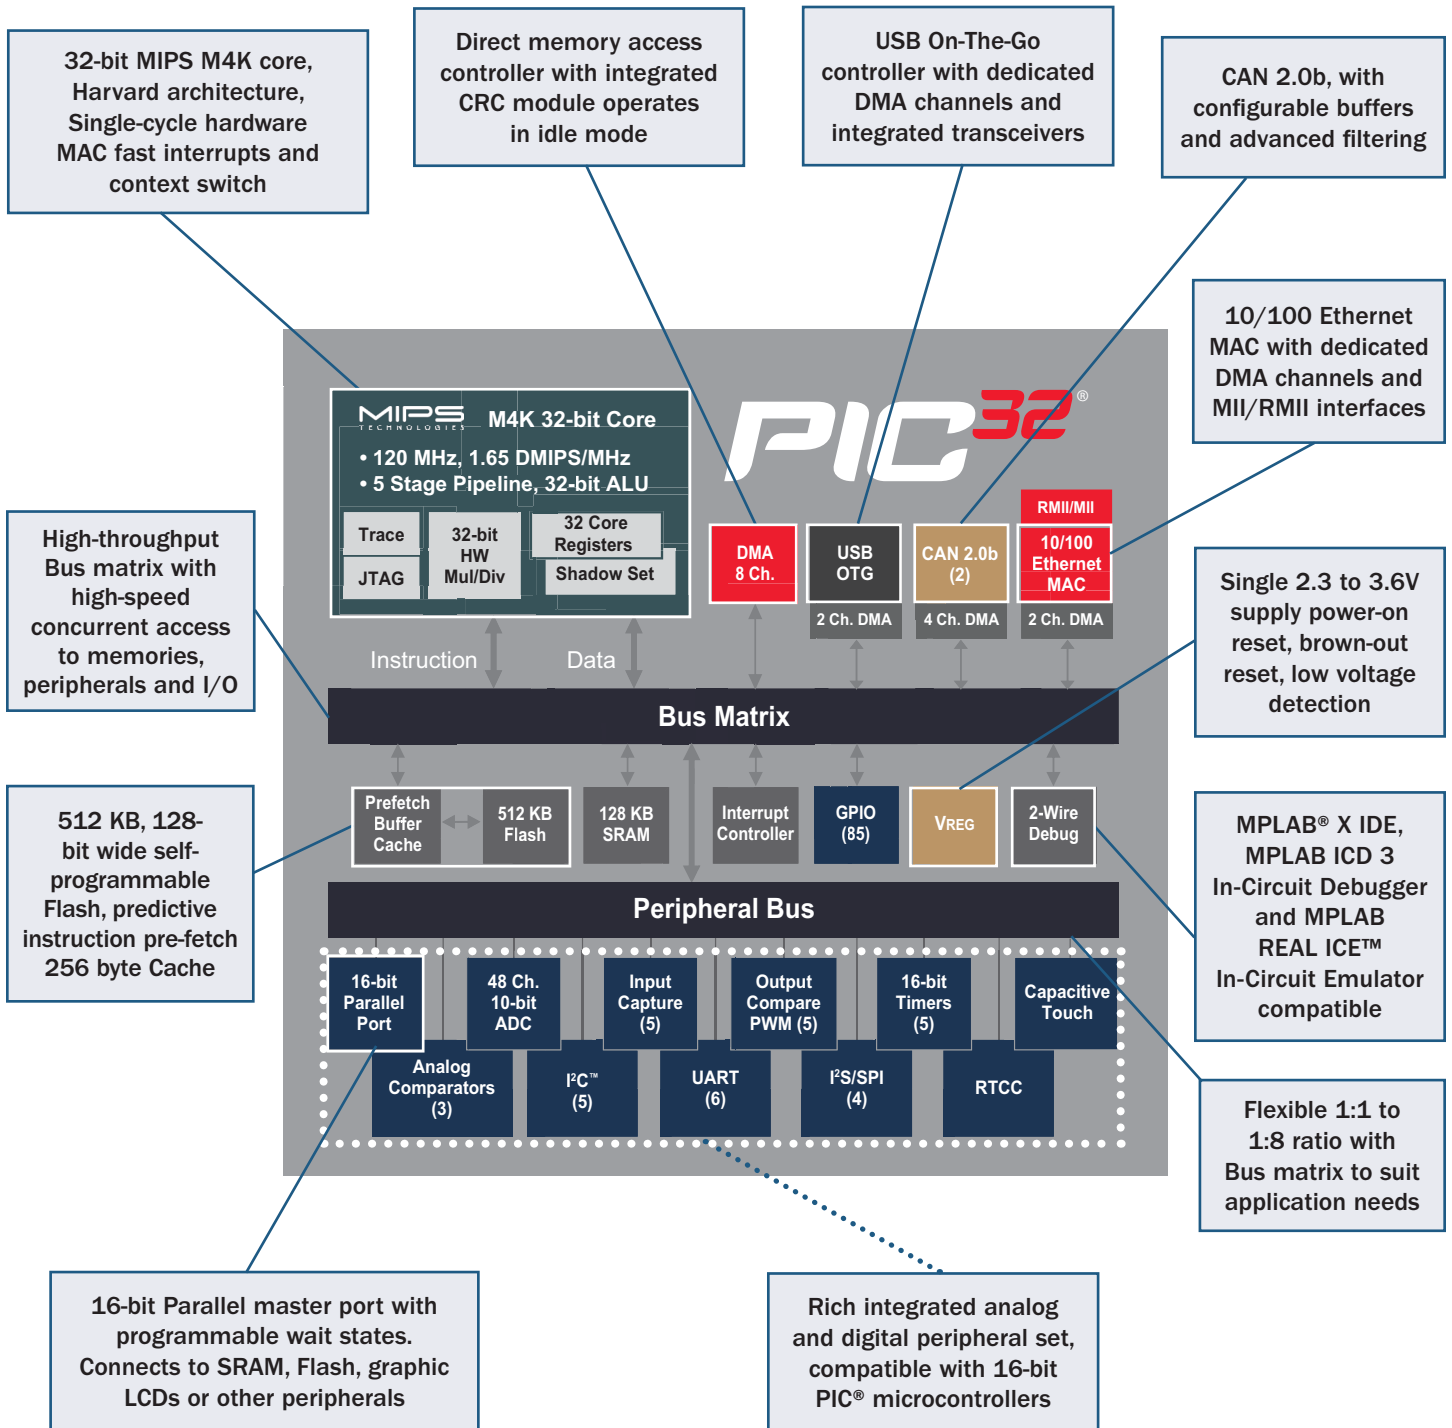

**Note:** Not all features are available on all PIC32 devices. Please see product family table for more information.



# Inside the MIPS32® microAptiv Core PIC32 MCU

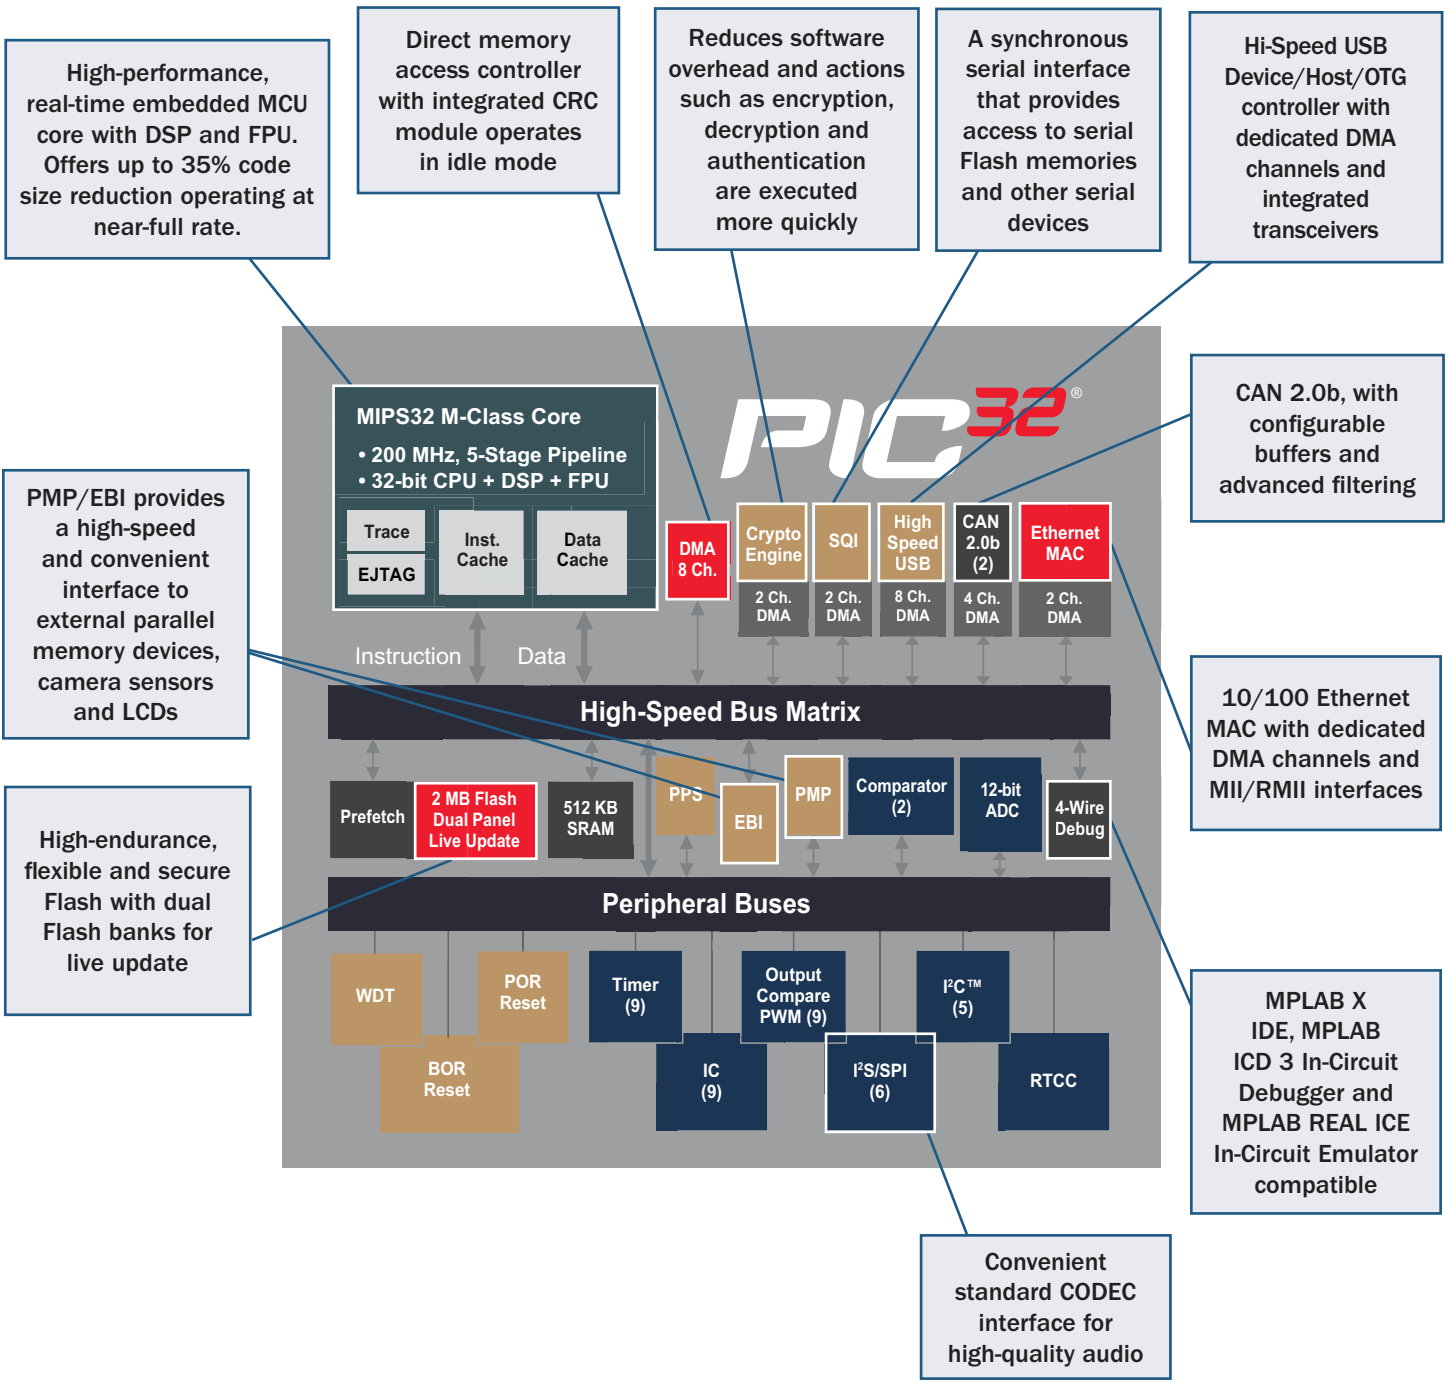

**Note:** Not all features are available on all PIC32 devices. Please see product family table for more information.

# Developing with the PIC32 Microcontroller

Microchip is the only silicon vendor with a full 8-, 16- and 32-bit microcontroller portfolio supported by a unified development environment. The MPLAB X IDE is free and easy to use.



## PIC32 Starter Kits

Getting started is easy with any of the fully integrated PIC32 Starter Kits. They feature simple installation, a getting started tutorial and a PIC32 starter board which easily connects to your PC via USB. The starter kits include:

- MPLAB X IDE and MPLAB XC32 C Compiler†
- PIC32 starter board with integrated programmer and debugger
- Code examples, documentation, tutorials and sample projects; optional I/O expansion board allows signal breakouts and connections for PICtail™ Plus daughter cards


†Free version has **no code size limit** and full optimizations. After 60 days some optimizations are disabled.

## PIC32 Development Tools

Choose a Platform: *Explorer 16 Platform OR Starter Kit Platform*


### Explorer 16 Platform

Explorer 16 Development Board (DM240001)



+

PIC32 Plug-in Modules (MA320001/2/3/11/12/14/15/18) (MA320002-2)

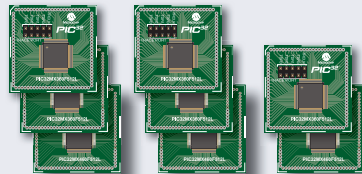

AND

MPLAB® ICD 3 In-Circuit Debugger (DV164035)



OR


MPLAB REAL ICE In-Circuit Emulation System (DV244005)



# Developing with the PIC32 Microcontroller

## Starter Kit Platform

PIC32MX1/2/5  
Starter Kit  
(DM320100)



Microstick II  
(DM330013-2)




PIC32 USB  
Starter Kit II  
(DM320003-2)



PIC32 USB  
Starter Kit III  
(DM320003-3)




PIC32 Starter Kit  
(DM320001)



Wi-Fi® G Demo Board  
(DV102412)




PIC32 Bluetooth  
Starter Kit  
(DM320018)



PIC32 Ethernet  
Starter Kit II  
(DM320004-2)




PIC32MZ Embedded  
Connectivity Starter Kit  
(DM320006)



PIC32MZ Embedded  
Connectivity Starter Kit  
with Crypto Engine  
(DM320006-C)



PIC32MZ with FPU  
Embedded Connectivity  
Starter Kit  
(DM320007)



PIC32MZ with FPU and  
Crypto Engine Embedded  
Connectivity Starter Kit  
(DM320007-C)



## OPTIONAL

PIC32 Audio Codec  
Daughter Board  
(AC320100)




Multimedia  
Expansion Board  
(DM320005)



Multimedia  
Expansion Board II  
(DM320005-2)



PIC32 Plug-in Modules for Bluetooth  
Audio Development Kit  
(MA320013/16/17/19)\*

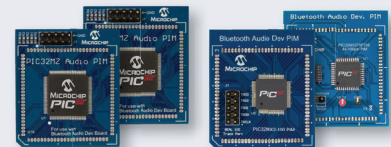


PIC32 Audio DAC  
Daughter Board  
(AC320032-2)



PIC32 GUI Development Board  
with Projected Capacitive Touch  
(DM320015)



PIC32 I/O  
Expansion Board  
(DM320002)



PIC32 Bluetooth® Audio  
Development Kit  
(DV320032)




\*Does not work with the Explorer 16 Development Board


# Developing with the PIC32 Microcontroller

## PICtail™ Boards Common to Both Development Platforms

Graphics Daughter Board  
with 3.2" Display Kit  
(AC164127-3)

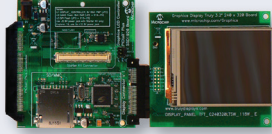


CAN/LIN PICtail Plus  
Daughter Board  
(AC164130-2)



Low-Cost Controllerless (LCC)  
Graphics PICtail Plus Board  
(AC164144)



M2M PICtail  
Daughter Board  
(AC320011)



PIC32 VGA Camera Sensor  
(VCS) PICtail Plus Board  
(AC164150)




MRF24WB0MA Wi-Fi  
Daughter Board  
(AC164136-4)




MRF24J40MA PICtail Plus  
2.4 GHz RF Card  
(AC164134)




PIC32MX CTMU  
Evaluation Board  
(AC323027)



Graphics Controller PICtail  
Plus Epson S1D13517 Board  
(AC164127-7)



Graphics Display Truly 7"  
800 × 480 (WVGA) PICtail  
Plus Board (AC164127-9)



... and many more!

## Third Party Application Software and Hardware Support

- Ashling Microsystems
- AVIX-RT
- chipKIT.net
- CMX Systems
- Digilent Inc.
- E.E. Tools
- EasyCode
- EasyGUI
- eflightworks
- ELNEC
- Express Logic
- FreeRTOS
- Fubarino
- Green Hills Software Inc.
- HCC-Embedded
- Interniche Technologies Inc.
- Lauterbach
- Macraigor Systems
- Micrium
- Micro/sys Inc.
- OLIMEX Ltd.
- OpenRTOS
- Pumpkin
- PubNub
- RoweBots Research Inc.
- Schmalzhaus
- SEGGER
- Serious Integrated
- Softlog
- SparkFun Electronics
- TechToys Company
- Virtual Fab
- wolfSSL

MPLAB Harmony Software Framework compatible.

For up-to-date information about our 32-bit portfolio, related development tools and technical support, visit: [www.microchip.com/PIC32](http://www.microchip.com/PIC32).



# PIC32 Microcontroller Product Families

## PIC32MX Devices

Device	Flash KB + Boot Flash (KB)	SRAM (KB)	Pin Count	Speed (MHz)	I <sup>2</sup> S/SPI	I <sup>2</sup> C™	UARTs	DMA Channels General/Dedicated	PPS	USB (Full/Hi-Speed)	10/100 Ethernet	CAN 2.0b	IC/OC/PWM	10-bit ADC 1 Msps	Analog Comparator	Timers 16b/32b	RTCC	Parallel Master Port	JTAG Program, Debug, Boundary Scan	Temp. Range (°C)			
PIC32MX110F016B	16 + 3	4	28	40	2/2	2	2	4/0	Y	N	N	N	5/5/5	10	3	5/2	Y	Y	Y	-40 to +105			
PIC32MX110F016C	16 + 3	4	36											12									
PIC32MX110F016D	16 + 3	4	44											13									
PIC32MX120F032B	32 + 3	8	28	40/50	2/2	2	4/0	Y	N	N	N	5/5/5	10	3	5/2	Y	Y	Y	-40 to +105				
PIC32MX120F032C	32 + 3	8	36										12										
PIC32MX120F032D	32 + 3	8	44										13										
PIC32MX120F064H	64 + 3	8	64	3		4							28										
PIC32MX130F064B	64 + 3	16	28	40	2/2		2							10									
PIC32MX130F064C	64 + 3	16	36											12									
PIC32MX130F064D	64 + 3	16	44											13									
PIC32MX130F128H	128 + 3	16	64		3		4							28									
PIC32MX130F128L	128 + 3	16	100											4								5	48
PIC32MX130F256B	256 + 3	16	28											2									10
PIC32MX130F256D	256 + 3	16	44	2		13																	
PIC32MX150F128B	128 + 3	32	28	40/50	2/2	2	2	4/0	Y	N	N	N	5/5/5	10	3	5/2	Y	Y	Y	-40 to +105			
PIC32MX150F128C	128 + 3	32	36											12									
PIC32MX150F128D	128 + 3	32	44											13									
PIC32MX150F256H	256 + 3	32	64	3		4							28										
PIC32MX150F256L	256 + 3	32	100	4		5							48										
PIC32MX170F256B	256 + 3	64	28		2/2		2							10									
PIC32MX170F256D	256 + 3	64	44											13									
PIC32MX170F512H	512 + 3	64	64											3									4
PIC32MX170F512L	512 + 3	64	100	4		5							48										
PIC32MX210F016B	16 + 3	4	28	40	2/2	2	2	4/2	Y	FS	N	N	5/5/5	9	3	5/2	Y	Y	Y	-40 to +105			
PIC32MX210F016C	16 + 3	4	36											12									
PIC32MX210F016D	16 + 3	4	44											13									
PIC32MX220F032B	32 + 3	8	28	40/50	2/2	2	2	4/2	Y	FS	N	N	5/5/5	9	3	5/2	Y	Y	Y	-40 to +105			
PIC32MX220F032C	32 + 3	8	36											12									
PIC32MX220F032D	32 + 3	8	44											13									
PIC32MX230F064B	64 + 3	16	28	40	2/2		2							9									
PIC32MX230F064C	64 + 3	16	36											12									
PIC32MX230F064D	64 + 3	16	44											13									
PIC32MX230F128H	128 + 3	16	64		3		4							28									
PIC32MX230F128L	128 + 3	16	100											4								5	48
PIC32MX230F256B	256 + 3	16	28											2									9
PIC32MX230F256D	256 + 3	16	44	2		13																	
PIC32MX250F128B	128 + 3	32	28	40/50	2/2	2	2	4/2	Y	FS	N	N	5/5/5	9	3	5/2	Y	Y	Y	-40 to +105			
PIC32MX250F128C	128 + 3	32	36											12									
PIC32MX250F128D	128 + 3	32	44											13									
PIC32MX250F256H	256 + 3	32	64	3		4							28										
PIC32MX250F256L	256 + 3	32	100	4		5							48										
PIC32MX270F256B	256 + 3	64	28		2/2		2							9									
PIC32MX270F256D	256 + 3	64	44											13									
PIC32MX270F512H	512 + 3	64	64											3									4
PIC32MX270F512L	512 + 3	64	100	4		5							48										

Note: AEC-Q100 qualified for grade 2 and 3. Check individual product pages on [www.microchip.com](http://www.microchip.com) for details.

# PIC32 Microcontroller Product Families

## PIC32MX Devices (Continued)

Device	Flash KB + Boot Flash (KB)	SRAM (KB)	Pin Count	Speed (MHz)	I <sup>2</sup> S/SPI	I <sup>2</sup> C™	UARTs	DMA Channels General/Dedicated	PPS	USB (Full/Hi-Speed)	10/100 Ethernet	CAN 2.0b	IC/OC/PWM	10-bit ADC 1 Msps	Analog Comparator	Timers 16b/32b	RTCC	Parallel Master Port	JTAG Program, Debug, Boundary Scan	Temp. Range (°C)												
PIC32MX320F032H	32 + 12	8	64	40	2/2	2	2	0/0	N	N	N	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105												
PIC32MX320F064H	64 + 12	16	64	40																												
PIC32MX320F064L			64	80																												
PIC32MX320F128H	128 + 12	16	64	80																												
PIC32MX320F128L			100	80																												
PIC32MX330F064H	64 + 12	16	64	100																												
PIC32MX330F064L			100	100	4/5	4/0	Y						28 ch																			
PIC32MX340F128H	128 + 12	32	64	80	2/2	2	2	4/0	N	N	N	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105												
PIC32MX340F128L			100	80																												
PIC32MX340F256H	256 + 12	32	64	80																												
PIC32MX360F256L			100	80																												
PIC32MX340F512H	512 + 12	32	64	80																												
PIC32MX360F512L			100	80																												
PIC32MX350F128H	128 + 12	32	64	100	2/2	2	4	4/0	Y	N	N	N	5/5/5	28 ch	2	5/2	Y	Y	Y	-40 to +105												
PIC32MX350F128L			100/124																		5											
PIC32MX350F526H	256 + 12	64	64																		4											
PIC32MX350F526L			100/124																		5											
PIC32MX370F512H	512 + 12	128	64																		4											
PIC32MX370F512L			100/124																		5											
PIC32MX420F032H	32 + 12	8	64	40	0/1	2	2	0/2	N	FS	N	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105												
PIC32MX430F064H	64 + 12	16	64	100	2/2																4	4/2	Y	28 ch								
PIC32MX430F064L			100	100	2/2																5			28 ch								
PIC32MX440F128H	128 + 12	32	64	80	0/1																2	N	N	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX440F128L			100	80	0/2																											
PIC32MX440F256H	256 + 12	32	64	80	0/1																											
PIC32MX460F256L			100	80	0/2																											
PIC32MX440F512H	512 + 12	32	64	80	0/1																											
PIC32MX460F512L			100	80	0/2																											
PIC32MX450F128H	128 + 12	32	64	100	2/2																4	4/2	Y	28 ch								
PIC32MX450F128L			100/124	5																												
PIC32MX450F256H	256 + 12	64	64	4																												
PIC32MX450F256L			100/124	5																												
PIC32MX470F512H	512 + 12	128	64	100/120		4																										
PIC32MX470F512L			100/124	5																												

Note: AEC-Q100 qualified for grade 2 and 3. Check individual product pages on [www.microchip.com](http://www.microchip.com) for details.

# PIC32 Microcontroller Product Families

## PIC32MX Devices (Continued)

Device	Flash KB + Boot Flash (KB)	SRAM (KB)	Pin Count	Speed (MHz)	I <sup>2</sup> S/SPI	I <sup>2</sup> C™	UARTs	DMA Channels General/Dedicated	PPS	USB (Full/Hi-Speed)	10/100 Ethernet	CAN 2.0b	IC/OC/PWM	10-bit ADC 1 Msps	Analog Comparator	Timers 16b/32b	RTCC	Parallel Master Port	JTAG Program, Debug, Boundary Scan	Temp. Range (°C)
PIC32MX530F128H	128+3	16	64	40/50	3	2	4	4/4	Y	FS	N	Y	5/5/5	28	3	5/2	Y	Y	Y	-40 to +105
PIC32MX530F128L	128+3	16	100		4		5													
PIC32MX570F512H	512+3	64	64		3		4													
PIC32MX570F512L	512+3	64	100		4		5													
PIC32MX570F512H	512+3	64	64		3		4													
PIC32MX570F512L	512+3	64	100		4		5													
PIC32MX534F064H	64 + 12	16	64	80	0/3	4	4/4	N	FS	N	1	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105	
PIC32MX534F064L		100	80	0/4	5															
PIC32MX564F064H		32	64	80	0/3	4														
PIC32MX564F064L		100	80	0/4	5															
PIC32MX564F128H	128 + 12	32	64	80	0/3	4	6	4/4	N	FS	N	1	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX564F128L			100	80	0/4	5														
PIC32MX575F256H	256 + 12	64	64	80	0/3	4	8/4	N	FS	Y	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105	
PIC32MX575F256L			100	80	0/4	5														
PIC32MX575F512H	512 + 12	64	64	80	0/3	4	6	4/4	N	FS	Y	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX575F512L			100	80	0/4	5														
PIC32MX664F064H	64 + 12	32	64	80	0/3	4	6	4/4	N	FS	Y	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX664F064L			100	80	0/4	5														
PIC32MX664F128H	128 + 12	32	64	80	0/3	4	6	4/4	N	FS	Y	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX664F128L			100	80	0/4	5														
PIC32MX675F256H	256 + 12	64	64	80	0/3	4	6	4/4	N	FS	Y	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX675F256L			100	80	0/4	5														
PIC32MX675F512H	512 + 12	64	64	80	0/3	4	8/4	N	FS	Y	N	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105	
PIC32MX675F512L			100	80	0/4	5														
PIC32MX695F512H	512 + 12	128	64	80	0/3	4	6	4/6	N	FS	Y	2	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX695F512L			100	80	0/4	5														
PIC32MX764F128H	128 + 12	32	64	80	0/3	4	6	4/6	N	FS	Y	1	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX764F128L			100	80	0/4	5														
PIC32MX775F256H	256 + 12	64	64	80	0/3	4	6	8/8	N	FS	Y	2	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX775F256L			100	80	0/4	5														
PIC32MX775F512H	512 + 12	64	64	80	0/3	4	6	8/8	N	FS	Y	2	5/5/5	16 ch	2	5/2	Y	Y	Y	-40 to +105
PIC32MX775F512L			100	80	0/4	5														
PIC32MX795F512H		128	64	80	0/3	4														
PIC32MX795F512L			100	80	0/4	5														

Note: AEC-Q100 qualified for grade 2 and 3. Check individual product pages on [www.microchip.com](http://www.microchip.com) for details.

# PIC32 Microcontroller Product Families

## PIC32MZ Devices

Device	Flash KB + Boot Flash (KB)	SRAM (KB)	Pin Count	Speed (MHz)	I <sup>2</sup> S/SPI	I <sup>2</sup> C™	UARTs	DMA Channels General/Dedicated	PPS	USB (Full/Hi-Speed)	10/100 Ethernet	CAN 2.0b	IC/OC/PWM	10-bit ADC	ADC S/H	Analog Comparator	Timers 16b/32b	RTCC	SQI	EBI	Parallel Master Port	JTAG Program, Debug, Boundary Scan	Crypto Engine	Temp. Range (°C)	
PIC32MZ2048ECG144	2048 + 160	512	144	200	6	5	6	8/12	Y	HS	Y	N	9/9/9	48 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85
PIC32MZ2048ECH144	2048 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ2048ECG124	2048 + 160	512	124	200	6	5	6	8/12	Y	HS	Y	N	9/9/9	48 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85
PIC32MZ2048ECH124	2048 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ2048ECG100	2048 + 160	512	100	200	6	5	6	8/12	Y	HS	Y	N	9/9/9	40 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85
PIC32MZ2048ECH100	2048 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ2048ECG064	2048 + 160	512	64	200	4	4	6	8/12	Y	HS	Y	N	9/9/9	24 ch	1	2	9/4	Y	Y	N	Y	Y	Y	N	-40 to +85
PIC32MZ2048ECH064	2048 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ1024ECG144	1024 + 160	512	144	200	6	5	6	8/12	Y	HS	Y	N	9/9/9	48 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85
PIC32MZ1024ECH144	1024 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ1024ECG124	1024 + 160	512	124	200	6	5	6	8/12	Y	HS	Y	N	9/9/9	48 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85
PIC32MZ1024ECH124	1024 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ1024ECG100	1024 + 160	512	100	200	6	5	6	8/12	Y	HS	Y	N	9/9/9	40 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85
PIC32MZ1024ECH100	1024 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ1024ECG064	1024 + 160	512	64	200	4	4	6	8/12	Y	HS	Y	N	9/9/9	24 ch	1	2	9/4	Y	Y	N	Y	Y	Y	N	-40 to +85
PIC32MZ1024ECH064	1024 + 160							8/16	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
PIC32MZ2048ECM144	2048 + 160	512	144	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ2048ECM124	2048 + 160								6	5	6	8/18	Y	HS	Y	2	9/9/9	40 ch	1	2	9/4	Y	Y	Y	Y
PIC32MZ2048ECM100	2048 + 160	512	100	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	40 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ2048ECM064	2048 + 160		64											4											
PIC32MZ1024ECM144	1024 + 160	512	144	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ1024ECM124	1024 + 160		124											4											
PIC32MZ1024ECM100	1024 + 160	512	100	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	40 ch	1	2	9/4	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ1024ECM064	1024 + 160		64											4											



# PIC32 Microcontroller Product Families

## PIC32MZ Devices with Floating Point Unit (FPU)

Device	Flash KB + Boot Flash (KB)	SRAM (KB)	Pin Count	Speed (MHz)	I <sup>2</sup> S/SPI	I <sup>2</sup> C™	UARTs	DMA Channels General/Dedicated	PPS	USB (Full/Hi-Speed)	10/100 Ethernet	CAN 2.0b	IC/OC/PWM	10-bit ADC	ADC S/H	Analog Comparator	Timers 16b/32b	RTCC	SQI	EBI	Parallel Master Port	JTAG Program, Debug, Boundary Scan	Crypto Engine	Temp. Range (°C)		
PIC32MZ2048EFG144	2048 + 160	512	144	200	6	5	6	8/12	Y	HS	Y	-	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85	
PIC32MZ2048EFH144	2048 + 160							8/16				2														
PIC32MZ2048EFG124	2048 + 160	512	124	200	6	5	6	8/12	Y	HS	Y	-	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85	
PIC32MZ2048EFH124	2048 + 160							8/16				2														
PIC32MZ2048EFG100	2048 + 160	512	100	200	6	5	6	8/12	Y	HS	Y	-	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85	
PIC32MZ2048EFH100	2048 + 160							8/16				2														
PIC32MZ2048EFG064	2048 + 160	512	64	200	4	4	6	8/12	Y	HS	Y	-	9/9/9	24	6	2	9/4	Y	Y	N	Y	Y	Y	N	-40 to +85	
PIC32MZ2048EFH064	2048 + 160							8/16				2														
PIC32MZ1024EFG144	1024 + 160	512	144	200	6	5	6	8/12	Y	HS	Y	-	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85	
PIC32MZ1024EFH144	1024 + 160							8/16				2														
PIC32MZ1024EFG124	1024 + 160	512	124	200	6	5	6	8/12	Y	HS	Y	-	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85	
PIC32MZ1024EFH124	1024 + 160							8/16				2														
PIC32MZ1024EFG100	1024 + 160	512	100	200	6	5	6	8/12	Y	HS	Y	-	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	N	-40 to +85	
PIC32MZ1024EFH100	1024 + 160							8/16				2														
PIC32MZ1024EFG064	1024 + 160	512	64	200	4	4	6	8/12	Y	HS	Y	-	9/9/9	24	6	2	9/4	Y	Y	N	Y	Y	Y	N	-40 to +85	
PIC32MZ1024EFH064	1024 + 160							8/16				2														
PIC32MZ2048EFM144	2048 + 160	512	144	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ2048EFM124	2048 + 160	512	124	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ2048EFM100	2048 + 160	512	100	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ2048EFM064	2048 + 160	512	64	200	4	4	6	8/18	Y	HS	Y	2	9/9/9	24	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ1024EFM144	1024 + 160	512	144	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ1024EFM124	1024 + 160	512	124	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ1024EFM100	1024 + 160	512	100	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85
PIC32MZ1024EFM064	1024 + 160	512	64	200	4	4	6	8/18	Y	HS	Y	2	9/9/9	24	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	Y	-40 to +85

Note: AEC-Q100 qualified for grade 1, 2 and 3. Check individual product pages on [www.microchip.com](http://www.microchip.com) for details. Please contact your Microchip representative for availability.


# PIC32 Microcontroller Product Families

## PIC32MZ Devices with Floating Point Unit (FPU) (Continued)

Device	Flash (KB + Boot Flash (KB))	SRAM (KB)	Pin Count	Speed (MHz)	I <sup>2</sup> S/SPI	I <sup>2</sup> C™	UARTs	DMA Channels General/Dedicated	PPS	USB (Full/Hi-Speed)	10/100 Ethernet	CAN 2.0b	IC/OC/PWM	10-bit ADC	ADC S/H	Analog Comparator	Timers 16b/32b	RTCC	SQI	EBI	Parallel Master Port	JTAG Program, Debug, Boundary Scan	Crypto Engine	Temp. Range (°C)	
PIC32MZ1024EFE144	1024 + 160	256	144	200	6	5	6	8/12	Y	HS	Y	–	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	–40 to +85
PIC32MZ1024EFF144	1024 + 160							8/16	2																
PIC32MZ1024EFE124	1024 + 160	256	124	200	6	5	6	8/12	Y	HS	Y	–	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	–40 to +85
PIC32MZ1024EFF124	1024 + 160							8/16	2																
PIC32MZ1024EFE100	1024 + 160	256	100	200	6	5	6	8/12	Y	HS	Y	–	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	N	–40 to +85
PIC32MZ1024EFF100	1024 + 160							8/16	2																
PIC32MZ1024EFE064	1024 + 160	256	64	200	4	4	6	8/12	Y	HS	Y	–	9/9/9	24	6	2	9/4	Y	Y	N	Y	Y	Y	N	–40 to +85
PIC32MZ1024EFF064	1024 + 160							8/16	2																
PIC32MZ1024EFK144	1024 + 160	256	144	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	–40 to +85
PIC32MZ1024EFK124	1024 + 160	256	124	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	–40 to +85
PIC32MZ1024EFK100	1024 + 160	256	100	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	–40 to +85
PIC32MZ1024EFK064	1024 + 160	256	64	200	4	4	6	8/18	Y	HS	Y	2	9/9/9	24	6	2	9/4	Y	Y	N	Y	Y	Y	Y	–40 to +85
PIC32MZ0512EFE144	512 + 160	128	144	200	6	5	6	8/12	Y	HS	Y	–	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	–40 to +85
PIC32MZ0512EFF144	512 + 160							8/16	2																
PIC32MZ0512EFE124	512 + 160	128	124	200	6	5	6	8/12	Y	HS	Y	–	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	N	–40 to +85
PIC32MZ0512EFF124	512 + 160							8/16	2																
PIC32MZ0512EFE100	512 + 160	128	100	200	6	5	6	8/12	Y	HS	Y	–	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	N	–40 to +85
PIC32MZ0512EFF100	512 + 160							8/16	2																
PIC32MZ0512EFE064	512 + 160	128	64	200	4	4	6	8/12	Y	HS	Y	–	9/9/9	24	6	2	9/4	Y	Y	N	Y	Y	Y	N	–40 to +85
PIC32MZ0512EFF064	512 + 160							8/16	2																
PIC32MZ0512EFK144	512 + 160	128	144	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	–40 to +85
PIC32MZ0512EFK124	512 + 160	128	124	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	48	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	–40 to +85
PIC32MZ0512EFK100	512 + 160	128	100	200	6	5	6	8/18	Y	HS	Y	2	9/9/9	40	6	2	9/4	Y	Y	Y	Y	Y	Y	Y	–40 to +85
PIC32MZ0512EFK064	512 + 160	128	64	200	4	4	6	8/18	Y	HS	Y	2	9/9/9	24	6	2	9/4	Y	Y	N	Y	Y	Y	Y	–40 to +85

Note: AEC-Q100 qualified for grade 1, 2 and 3. Check individual product pages on [www.microchip.com](http://www.microchip.com) for details. Please contact your Microchip representative for availability.

# Package Options



28-pin QFN  
6 × 6 mm (ML)



28-pin SSOP  
10.2 × 7.8 mm (SS)



28-pin SOIC  
17.9 × 10.3 mm (SO)



28-pin SPDIP  
36 × 7.5 mm (SP)




36-pin VTLA  
5 × 5 mm (TL)



44-pin VTLA  
6 × 6 mm (TL)




44-pin TQFP  
10 × 10 mm (PT)




44-pin QFN  
8 × 8 mm (ML)



64-lead TQFP  
10 × 10 mm (PT)




64-lead QFN  
9 × 9 mm (MR)



124-lead VTLA (TL)  
9 × 9 mm



121-ball BGA  
10 × 10 mm (BG)



100-ball TFBGA\*  
7 × 7 × 1.2 mm



100-lead TQFP  
12 × 12 mm (PT)



100-lead TQFP  
14 × 14 mm (PF)



144-lead TQFP (PH)  
16 × 16 × 1 mm



144-lead LQFP (PL)  
20 × 20 × 1.4 mm

\*For availability please contact your local Microchip Sales Office.

## Support

Microchip is committed to supporting its customers in developing products faster and more efficiently. We maintain a worldwide network of field applications engineers and technical support ready to provide product and system assistance. In addition, the following service areas are available at [www.microchip.com](http://www.microchip.com):

- **Support** link provides a way to get questions answered fast: <http://support.microchip.com>
- **Sample** link offers evaluation samples of any Microchip device: <http://sample.microchip.com>
- **Forum** link provides access to knowledge base and peer help: <http://forum.microchip.com>
- **Buy** link provides locations of Microchip Sales Channel Partners: [www.microchip.com/sales](http://www.microchip.com/sales)

## Sales Office Listing

### AMERICAS

**Atlanta**  
Tel: 678-957-9614

**Austin**  
Tel: 512-257-3370

**Boston**  
Tel: 774-760-0087

**Chandler**  
Tel: 480-792-7200

**Chicago**  
Tel: 630-285-0071

**Cleveland**  
Tel: 216-447-0464

**Dallas**  
Tel: 972-818-7423

**Detroit**  
Tel: 248-538-2250

**Houston**  
Tel: 281-894-5983

**Indianapolis**  
Tel: 317-773-8323

**Los Angeles**  
Tel: 949-462-9523

**New York**  
Tel: 631-435-6000

**San Jose**  
Tel: 408-735-9110

**Toronto**  
Tel: 905-673-0699

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39

**Denmark - Copenhagen**  
Tel: 45-4450-2828

**France - Paris**  
Tel: 33-1-69-53-63-20

**Germany - Dusseldorf**  
Tel: 49-2129-3766400

**Germany - Munich**  
Tel: 49-89-627-144-0

**Germany - Pforzheim**  
Tel: 49-7231-424750

**Italy - Milan**  
Tel: 39-0331-742611

**Italy - Venice**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399

**Poland - Warsaw**  
Tel: 48-22-3325737

**Spain - Madrid**  
Tel: 34-91-708-08-90

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800

## Training

If additional training interests you, then Microchip can help. We continue to expand our technical training options, offering a growing list of courses and in-depth curriculum locally, as well as significant online resources – whenever you want to use them.

- Technical Training Centers and Other Resources: [www.microchip.com/training](http://www.microchip.com/training)
- MASTERS Conferences: [www.microchip.com/masters](http://www.microchip.com/masters)
- Worldwide Seminars: [www.microchip.com/seminars](http://www.microchip.com/seminars)
- eLearning: [www.microchip.com/webseminars](http://www.microchip.com/webseminars)

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Hangzhou**  
Tel: 86-571-87928115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-5407-5533

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xiamen**  
Tel: 86-592-2388138

**China - Xian**  
Tel: 86-29-8833-7252

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-3019-1500

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-6201-9857

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-5778-366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

01/27/15

Microcontrollers • Digital Signal Controllers • Analog • Memory • Wireless

Information subject to change. The Microchip name and logo, the Microchip logo, the PIC32 logo, MPLAB and PIC are registered trademarks and MiWi, PICTail and REAL ICE are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. mTouch is a registered trademark of Microchip Technology Incorporated in the U.S.A. All other trademarks mentioned herein are property of their respective companies. © 2015, Microchip Technology Incorporated. All Rights Reserved. Printed in the U.S.A. 6/15 DS30009904Q

  
**MICROCHIP**  
[www.microchip.com](http://www.microchip.com)

Microchip Technology Inc.  
2355 W. Chandler Blvd.  
Chandler, AZ 85224-6199