

60W Waterproof LED Power Supply

1 of 2



Features :

- IP67 design for indoor or outdoor installations
- Protections: Short circuit / Overload/Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting
- Products through CE, RoHS Certification
- 1 years warranty


IP67 CE RoHS

SPECIFICATION

MODEL		05V60W	12V60W	24V60W		
OUTPUT	DC VOLTAGE	5V	12V	24V		
	RATED CURRENT	12A	5A	2.5A		
	CURRENT RANGE	0~12A	0~5A	0~2.5A		
	RATED POWER	60W	60W	60W		
	RIPPLE & NOISE (max.) ^{NOTE 2}	150mV	150mV	150mV		
	VOLTAGE TOLERANCE ^{NOTE 3}	±10%	±4%	±2%		
	SETUP, RISE TIME	80ms/220VAC				
	HOLD UP TIME (Typ.)	60ms/220VAC				
INPUT	VOLTAGE RANGE	170 ~ 250VAC				
	FREQUENCY RANGE	50 ~ 60Hz				
	POWER FACTOR (Typ.)	PF>0.6/220VAC				
	EFFICIENCY (Typ.)	77%	80%	81%		
	AC CURRENT (Typ.)	0.57A/220VAC				
	INRUSH CURRENT (Typ.)	COLD START 40A/220VAC				
PROTECTION	Short circuit	Protection type : recovers automatically after fault condition is removed				
	Overload	More than rated load protection				
	Over temperature	Protection type : Shut down o/p voltage, re-power on to recover				
ENVIRONMENT	WORKING TEMP.	-30 ~ +50°C (Refer to output load derating curve)				
	WORKING HUMIDITY	20 ~ 99% RH non-condensing(Waterproof)				
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C , 10 ~ 99% RH				
SAFETY & EMC	SAFETY STANDARDS	CE Mark (LVD) , IP67				
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-GND:1.5KVAC				
	EMC Test Standards	EN55015:2006 ; EN61547:1995+A1:2000 ; EN61000-3-2:2006 ; EN61000-3-3:1995+A2:2005 ; EN61347-1:2001 ; EN61347-2-13:2006				
NOTE	<p>1. All parameters NOT specially mentioned are measured at 220VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 10uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p>					

60W Waterproof LED Power Supply

Mechanical Specification

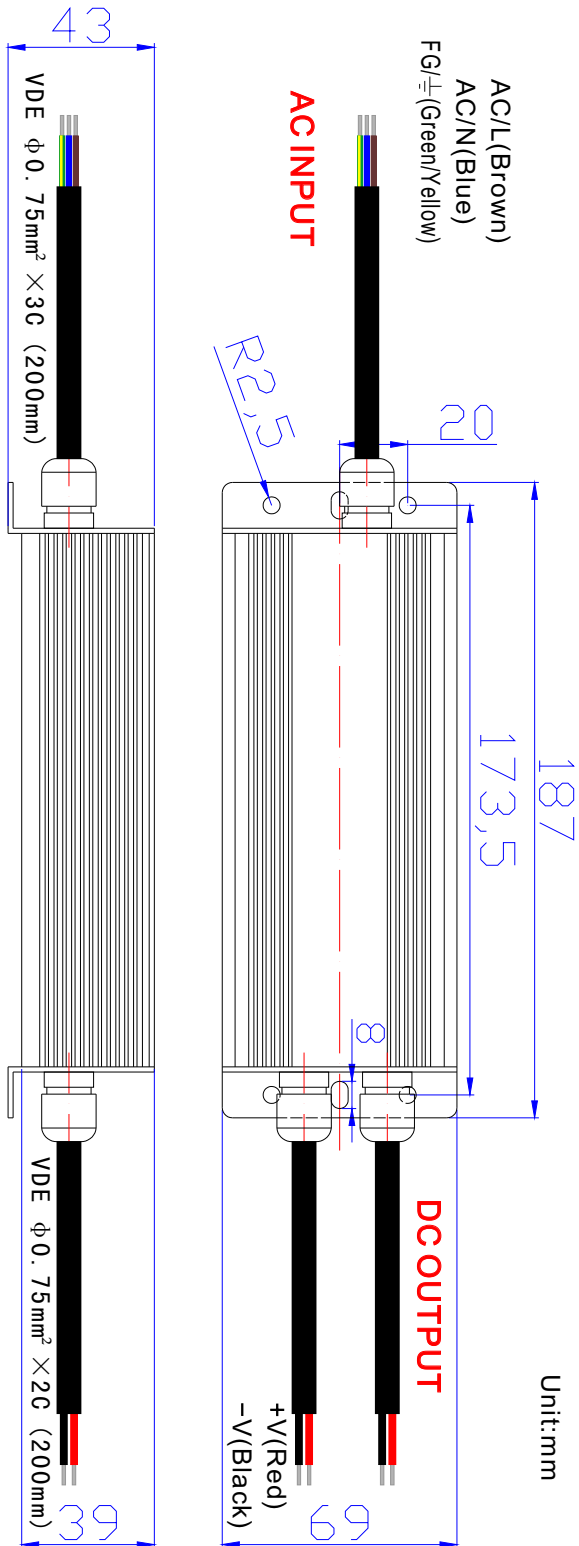

Others

DIMENSION	187×69×43(mm) (L×W×H)
CARTON QUANTITY	20PCS/Carton
CARTON SIZE	450×315×200(mm)
WEIGHT	900g/PCS

Derating Curve

