



GPS antenna | 2JM040

reference

**2JM040**

mounting position	<b>SMD</b>
frequency	<b>1575.42 MHz</b>
nominal impedance	<b>50 Ohms</b>
power	<b>30mW (at 3V)</b>
voltage	<b>2,7V to 5V</b>
current	<b>9mA at 3V</b>
gain	<b>18dB</b>
polarization	<b>RHCP</b>
noise figure	<b>2,2dB</b>
dimensions - ceramic patch	<b>13mm x 13mm x 4mm</b>
dimensions - PCB - perpendicular to CP	<b>13mm x 7mm x 0,8mm</b>
working temperature	<b>-40°C to +85°C</b>

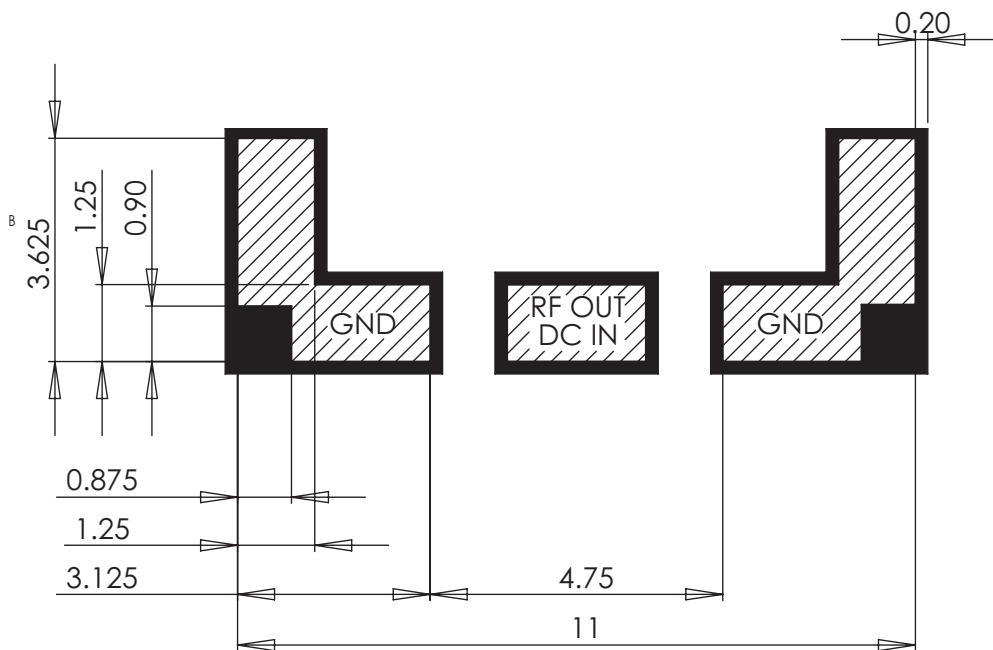

Solder Resist



Copper