

P/N: TA72

Copyright

© 2017, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: TA72

Release:

Commit: 42570

Language:

Modified: 2017-05-09

Formatted: 2017-05-09

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



Part number	TA72
Name	Large Universal Flex Current Probe Accessory
Description	10" (25 cm) 3000 A AC flexible current probe with universal mV output and worklights
<p>The FLIR Universal Flex Current Probe accessories are designed to add capabilities, simplify challenges, and get the best readings with your existing meter. Made with a narrow flexible coil clamp and locking mechanism, the FLIR TA72 and TA74 let you easily take measurements in tight or awkward spots—a difficult task with a traditional hard jaw clamp meter. The connection is a standard banana plug and the output is a voltage signal, so it's compatible with most DMMs and clamp meters, regardless of brand.</p>	
<p>Take accurate measurements in tight or awkward spots—tricky conductors conquered:</p> <ul style="list-style-type: none"> Snake the coil around obstacles with ease, even in deep, crowded cabinets. Measure multiple conductors and targets with limited clearance. Switchable AC current range: 30 A, 300 A, and 3000 A. 	
<p>Empower your meter—compatible with most DMMs and clamp meters, regardless of brand:</p> <ul style="list-style-type: none"> Adds 3000 A AC measurements to existing meters. Standard banana plug connectors fit most meters. AC voltage output for wide compatibility. 	
<p>Easy inspection and navigation—designed with your convenience in mind:</p> <ul style="list-style-type: none"> Bright, dual-LED worklights provide built-in illumination for dark cabinets. Rugged design drop-tested to 3 m, portable, and lightweight. Limited lifetime warranty with registration. 	
Minimum requirements for meter compatibility with TA7x	AC voltage function, 4000-count display, 1 mV resolution
Suitable main units	DM93, DM92
Measurement	
Maximum AC	3000 A AC
AC ranges and resolution	30.00 A, 300.0 A, 3000 A
Basic AC accuracy (full scale)	±3.0% + 5 digits
Measurement rate	1.5 samples per second, nominal
AC bandwidth	45–500 Hz (sine wave)
Detailed accuracy	30.00 A ± (3.0% + 5 digits), 300.0 A ± (3.0% + 5 digits), 3000 A ± (3.0% + 5 digits)
Positional error (distance from optimum)	15 mm (0.6") ± 2.0%, 25 mm (1.0") ± 2.5%, 35 mm (1.4") ± 3.0%



FLIR TA72

P/N: TA72

© 2017, FLIR Systems, Inc.

#TA72; r. /42570;

Meter data	
Maximum conductor diameter	6 cm (2.4")
Flex cable length	25 cm (10")
Coil bend radius	38 mm (1.5")
Coil diameter	7.5 mm (0.3")
Coil tip diameter	13 mm (0.5")
Probe length	1.9 m (73")
Worklight	Two white LEDs
Power system	
Power supply	2 × 1.5 V AAA
Battery life	160 hours with alkaline batteries (calculated)
Auto power off	Approximately 10 minutes after power on or disable
Environmental	
Drop test	3 m (9.8')
IP rating	IP54 dust-protected and splash-resistant
Maximum operating altitude	2000 m (6562')
Operating temperature	0–50°C (32–122°F)
Operating humidity	Maximum 80% up to 35°C (95°F) decreasing linearly to 60% at 45°C (113°F)
Temperature coefficient	0.2 × specified accuracy/°C, <64.5°F (18°C), >82.4°F (28°C)
Storage temperature	–20 to +60°C (–4 to +140°F) without batteries
Storage humidity	80% relative humidity (maximum)
Certifications	
Agency approvals	RCM, CSA, KC
Safety compliance	CAT IV—600 V, CAT III—1000 V
Standards	EN61010-1, EN61010-2-032, EN61326-1
Physical data	
Dimensions (W × H × D)	120 mm × 280 mm × 25 mm (4.7" × 11.0" × 1.0")
Weight	170 g (6.0 oz.) with batteries
Shipping	
Packaging type	Color box
Packaging contents	TA72, 2 × AAA 1.5 V Energizer batteries, quick start guide, user manual on CD
Packaging weight	0.61 kg
Packaging dimensions (L × W × H)	32 cm × 18.5 cm × 6.8 cm
Inner carton quantity	3
Inner carton weight	1.94 kg
Inner carton dimensions (L × W × H)	59.5 cm × 6.3 cm × 20.3 cm
Master carton quantity	12
Master carton weight	9.5 kg
Master carton dimensions (L × W × H)	61 cm × 50 cm × 22 cm
EAN-13	079395037727



FLIR TA72


P/N: TA72

© 2017, FLIR Systems, Inc.

#TA72; r. /42570;

Shipping	
UPC-12	793950377727
Country of origin	Taiwan
Tariff code	9030908821
Technical support	
Website	http://support.flir.com
E-mail	TMSupport@flir.com
Phone	855-499-3662
Repairs	repair@flir.com

© 2015, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited

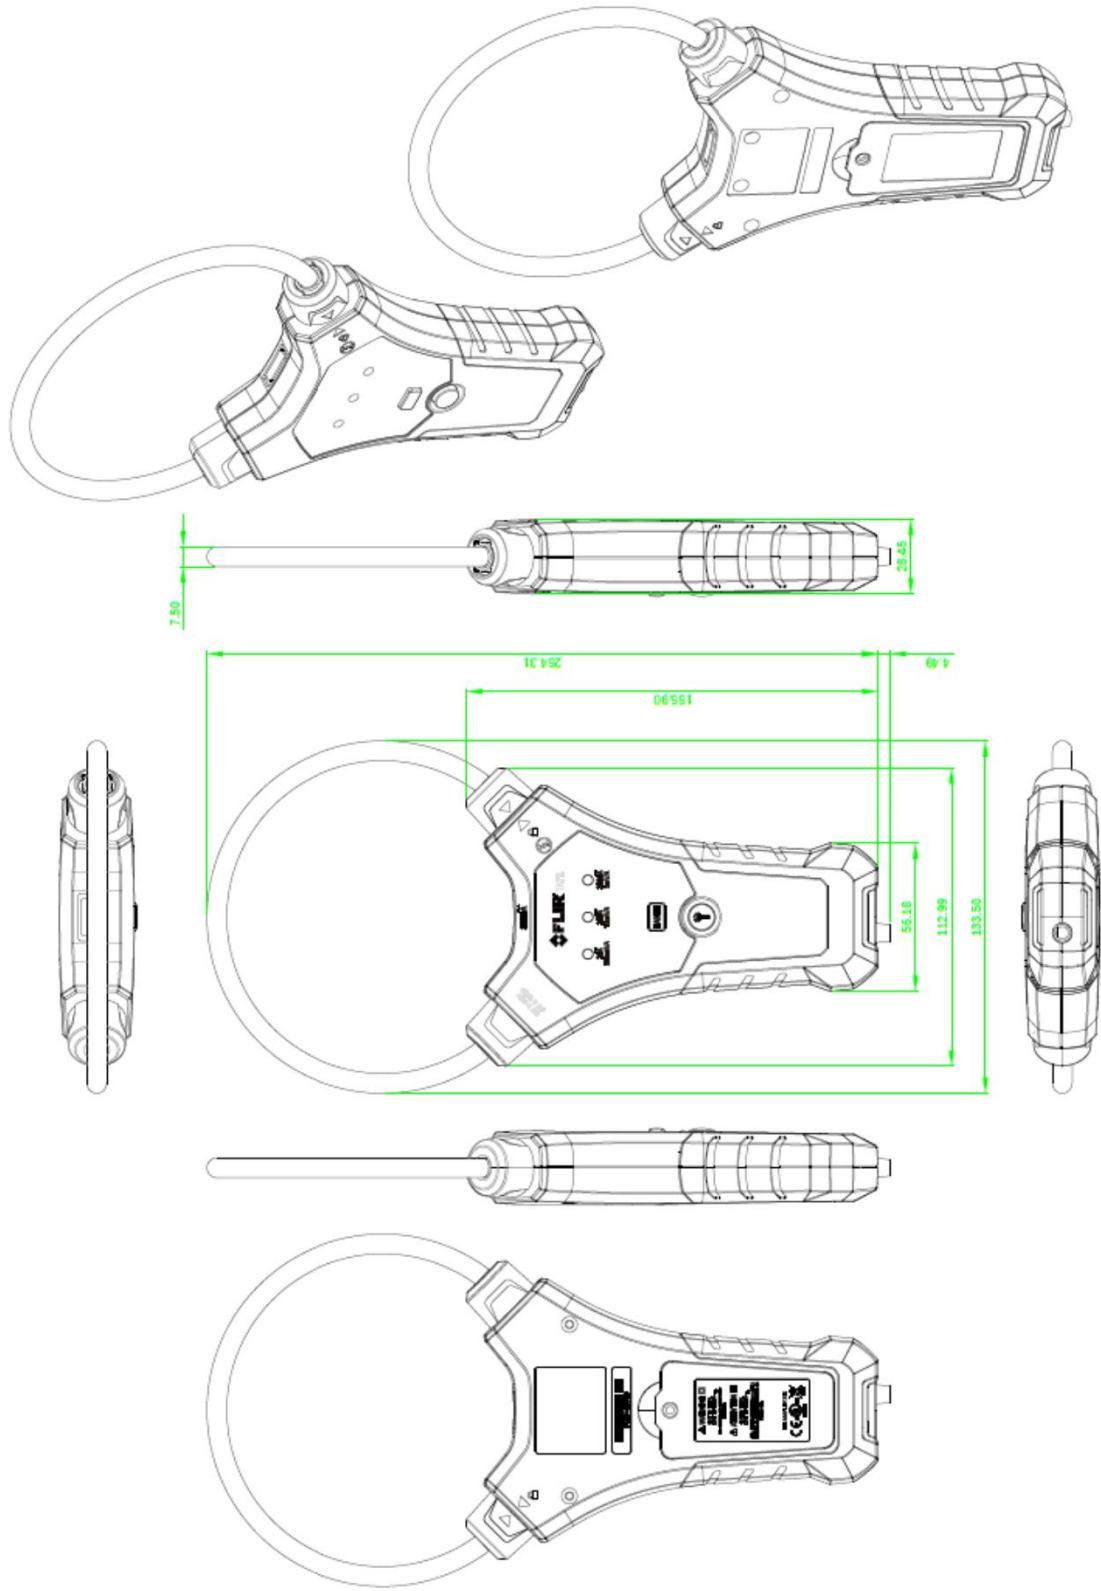

Modified Date	Modified By
Thursday, April 23, 2015	T&M Engineering
Description	
FLIR TA72 Flex Clamp Probe	