




SPECIFICATIONS

Voltage Rating : 100V AC/DC
 Current Rating : 2A AC/DC
 Withstanding Voltage : 800V AC/minute
 Insulation Resistance : 1,000MΩ min
 Temperature Range : - 25℃ to + 85℃
 Contact Resistance : 20mΩ max


Material :
 Contact : Brass
 Package: bag

721-7 1-xx T W 09
 1 2 3 4 5

- 1. 7: Green Product(NY66)
9: Green Product High Temp
- 2. No. of contacts per row
- 3. G: Gold flash
S: Selective
T: Tin plated
- 4. S: Crystal insulator
W: White insulator
- 5. Pinrex internal code.
Without post/With Kink

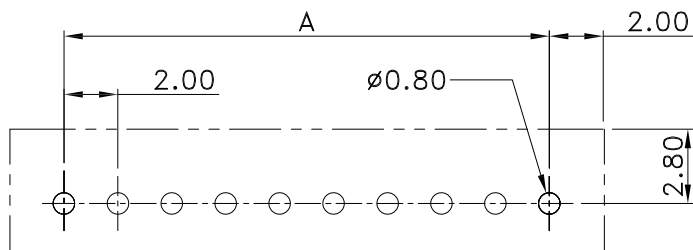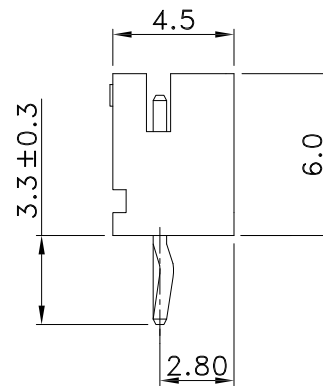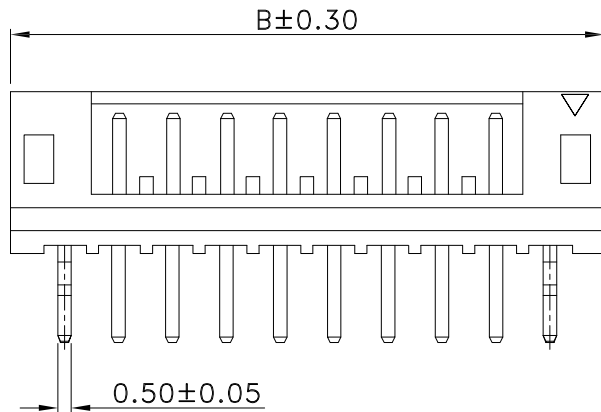

Recommended PCB Layout
 General Tolerances ±0.05



Poles	Dimension(mm)		
	A	B	C
02	2.00	6.00	5.00
03	4.00	8.00	7.00
04	6.00	10.00	9.00
05	8.00	12.00	11.00
06	10.00	14.00	13.00
07	12.00	16.00	15.00
08	14.00	18.00	17.00
09	16.00	20.00	19.00
10	18.00	22.00	21.00
11	20.00	24.00	23.00
12	22.00	26.00	25.00
13	24.00	28.00	27.00
14	26.00	30.00	29.00
15	28.00	32.00	31.00
16	30.00	34.00	33.00

		TOLERANCE				OLD PART NO.		TITLE			頻銳科技股份有限公司 PINREX TECHNOLOGY CORP.
C	Update	2023/06/14	.0 =±.30	UNITS : mm	DRAWER 罗苗苗	CHECK 李剑	JST 2.0mm WAFER STRAIGHT TYPE		DRAW NO.		
B	增加工作溫度	2016/04/29	.00 =±.20	SCALE NONE	SHEET 1 OF 1	REV. C	APP'D 李剑	NEW PART NO.		721-71-xxTW09	721-71-xxTW09(C版)
A	RELEASE	2013/05/22	.0000=±.	SIZE A4							
REV.	DESCRIPTION	DATE	ANG.=±3'								