


Item no.: 250-502/000-006
 Product description: 1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER
 PIN/POLE IN LINE 2 POLE PIN SPACING 5 MM / 0.197 IN
 WITH PUSH BUTTONS WITH TEST SLOT FOR Ø

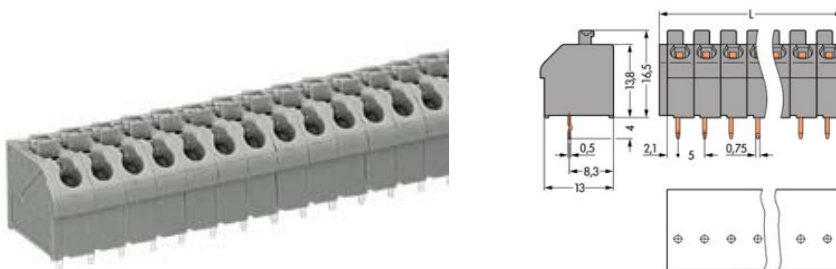

Produkt kann von Bild abweichen / product may differ

Packing unit 400 4*100 pieces

RoHS compliant

Product group	4 (Printed Circuit)
Weight	2.119 g
Color	blue
No. of connection Points	2
No. of potentials	2
pole count	2
Height	16.5 mm
Height	0.65 in
Width	11.5 mm
Width	0.453 in
Depth	13 mm
Depth	0.512 in
Pin spacing from	5 mm
Pin spacing from	0.197 in
Pollution degree	2
Measured voltage EN	320 V
Measured shock voltage	4 kV
Current intensity EN	17.5 A

Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	4 kV
Current intensity EN	17.5 A



Cross section [mm ²]	0.5 - 1.5 mm ²
Wiring method	solid
Cross section [mm ²]	0.75 - 1.5 mm ²
Wiring method	fine-stranded
Cross section [mm ²]	0.5 - 1 mm ²
Wiring method	fine-stranded (with ferrule and plastic collar)
Cross section [mm ²]	0.5 - 1 mm ²
Wiring method	fine-stranded (with ferrule, without plastic collar)
Cross section [AWG]	20 - 14 AWG
Strip length from	9 mm
Strip length to	10 mm
Material group	I
Contact material	Electrolytic copper (Ecu)
Contact surface	tin-plated

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected