


# TWN4 MULTITECH 2 M HF

## SINGLE-FREQUENCY RFID MODULE FOR HF WITH NFC SUPPORT

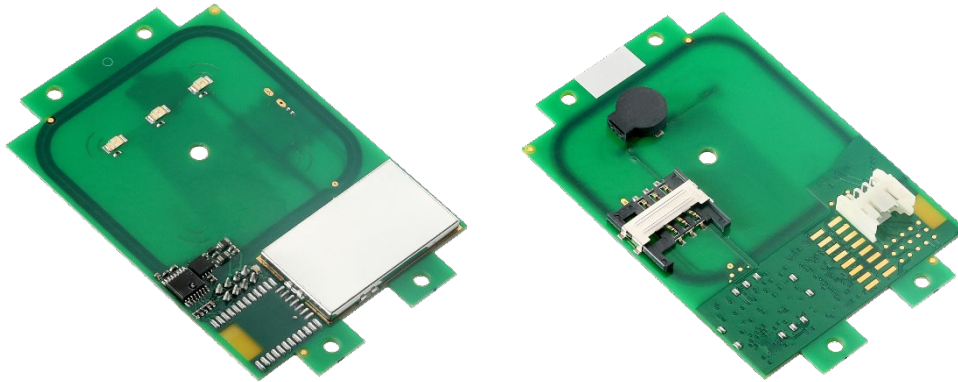

TWN4 MultiTech 2 M HF  
(exemplary illustrations)

The TWN4 MultiTech 2 family of contactless RFID readers and modules allows users to read and write to almost any LF and HF tags and labels. All products support NFC and, optionally, Bluetooth Low Energy (BLE). In addition, they are also compatible with the two most commonly used smartphone operating systems, Android and iOS, which gives the option to integrate them in mobile identification applications. The desktop readers are available as Plug & Play devices that can be easily customized (i.e. inlay and housing color), whereas the PCB modules offer a large amount of interfaces and a perfect form factor for an easy and quick integration in any host device. This broad range of product features makes the TWN4 MultiTech 2 family an excellent solution for almost every project.

Key features of the TWN4 MultiTech 2 M HF RFID module include a powerful SDK for writing apps that are executed directly on the module, the possibility to upgrade the firmware in the field and a direct chip-commands support. Additionally, the module can read simultaneously a lot of HF RFID technologies from the 13.56 MHz frequency band, including NFC. This gives the option to select as many of the technologies required instead of being forced to select just a few ones.

### Special features:

- + Possibility to read many HF RFID technologies
- + Cost-optimized reader solution
- + Supports Apple VAS (Apple ECP 2.0 ready)<sup>1)</sup>
- + Powerful SDK for writing apps which are executed directly on the module
- + Firmware update in the field possible
- + On-board 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Direct chip-commands support
- + CCID and PC/SC 2.01
- + Compact form factor for easy integration



Elevator



EV Chargers



Access



Shop POS



Fitness  
Equipment



Ticket POS



PC Log-on



Document  
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time  
Attendance



Industrial  
PC

## TECHNICAL DATA

FREQUENCY	13.56 MHz (HF)
ANTENNA(S)	Integrated
DIMENSIONS (L X W X H)	Approx. 76 x 49 x 9 mm / 3.0 x 1.9 x 0.35 inch
POWER	USB: 4.3 V - 5.5 V Generic interface (X1): 3.3 V ± 5% RS-232: requires 5 V external power supply PS2 classified power source according to IEC 62368-1, short-circuit current < 8 A
CURRENT CONSUMPTION	RF field on: 200 mA typically
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -40 °C up to +85 °C (-40 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
READ/WRITE DISTANCE	Up to 100 mm / 4 inch, depending on environment and transponder
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
MTBF	500,000 hours
WEIGHT	Approx. 10 g / 0.36 oz (without cable)
OS SUPPORT	Windows 7 (32-/64-bit) and higher versions, Linux, Android <sup>2)</sup> , iOS <sup>2)</sup> , MAC OS X <sup>2)</sup>
PERIPHERAL INTERFACES	USB, RS-232, TTL serial (logic level 3.3 V, CMOS, 5 V tolerant), I <sup>2</sup> C, 4 GPIOs, Clock/Data, Wiegand D0/D1, 1 SAM slot
TRANSMISSION SPEED	Host: USB full speed (12 Mbit/s), RS-232: up to 115,200 baud, HF Air: up to 848 kbit/s
CERTIFICATION NAME	TWN4 MultiTech 2 M HF
CERTIFICATION(S)	CE/RED, FCC, IC, REACH and RoHS-III compliant, Apple VAS certified (Apple ECP 2.0 ready) <sup>1)</sup> , and many more <sup>3)</sup>
ORDER CODE(S)	T4BO-F2 Reader module, standard T4BO-F2-I Reader module, with I option

## SUPPORTED TRANSPONDERS<sup>4)</sup>


SUPPORTED TRANSPONDERS (STANDARD) 13.56 MHZ	<p><u>ISO 14443A:</u> LEGIC Advant<sup>5)</sup>, NTAG2xx, MIFARE Classic, MIFARE Classic EV1<sup>6)</sup>, MIFARE DESFire EV1, MIFARE DESFire EV2<sup>7)</sup>, MIFARE DESFire EV3<sup>7)</sup>, MIFARE DESFire Light<sup>2)</sup>, MIFARE Mini, MIFARE Plus S, MIFARE Plus X, MIFARE Smart MX<sup>8)</sup>, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1<sup>6)</sup>, SLE44R35<sup>9)</sup>, SLE66Rxx (my-d move)<sup>8)</sup>, Topaz</p> <p><u>ISO 14443B:</u> Calypso<sup>8)</sup>, Calypso Innovatron protocol<sup>8)</sup>, CEPAS<sup>8)</sup>, CTS, Pico Pass<sup>9)</sup>, SRI4K, SRI512, SRIX4K, SRT512</p> <p><u>ISO 15693:</u> EM4x33<sup>8)</sup>, EM4x35<sup>8)</sup>, ICODE SLI, LEGIC Advant<sup>5)</sup>, M24LR16/64, MB89R118/119, PicoPass<sup>9)</sup>, SRF55Vxx (my-d vicinity)<sup>8)</sup>, Tag-it</p> <p><u>ISO 18092 / ECMA-340:</u> NFC Forum Tag 1-5, Sony FeliCa<sup>10)</sup></p> <p><u>LEAF Identity:</u> LEAF<sup>11)</sup></p>
SUPPORTED TRANSPONDERS (I OPTION) <sup>12)</sup>	All standard transponders <sup>13)</sup> , HID MIFARE DESFire SE, HID MIFARE Classic SE, HID SEOS, HID iCLASS Legacy/SR/SE
SUPPORTED TRANSPONDERS (AV OPTION)	Apple VAS <sup>1)</sup>

<sup>1)</sup>For Apple licensees only and eligible implementers. Please contact ELATEC for details. <sup>2)</sup>On request <sup>3)</sup>More information on request <sup>4)</sup>Unless otherwise agreed with ELATEC, the product is delivered with a standard firmware version that might be older than the latest firmware developed by ELATEC. This firmware version can be changed using the ELATEC AppBlaster tool. Please note that the information given in this document regarding the transponder technologies supported by the product is based on the latest firmware version. <sup>5)</sup>UID only <sup>6)</sup>r/w enhanced security features on request <sup>7)</sup>Supported as part of the EV1 downward compatibility <sup>8)</sup>r/w in direct chip command mode <sup>9)</sup>UID only, r/w on request <sup>10)</sup>UID + r/w public area <sup>11)</sup>AV2 only, requires one free SAM slot for MIFARE SAM AV2 card <sup>12)</sup>Requires one free SAM slot for HID iCLASS SE processor <sup>13)</sup>The reader has one SAM slot only and cannot support LEAF and the I option at the same time.

## ACCESSORIES

CABLES	CAB-B2	USB cable type A 200 cm / 78.74 inch
	CAB-B3	USB cable type A 12 cm / 4.72 inch
	CAB-B4	USB cable type A 45 cm / 17.72 inch
	CAB-B7	USB cable type A 120 cm / 47.24 inch
	CAB-M1	USB cable mini 12 cm / 4.72 inch
	CAB-M2	USB cable mini 25 cm / 9.84 inch
	CAB-R2	RS-232 cable 200 cm / 78.74 inch
POWER SUPPLY	PWA-AUS4	Power supply (AUS)
	PWA-EU4	Power supply (EU)
	PWA-UK4	Power supply (UK)
	PWA-US4	Power supply (US)

## TECHNICAL DRAWINGS

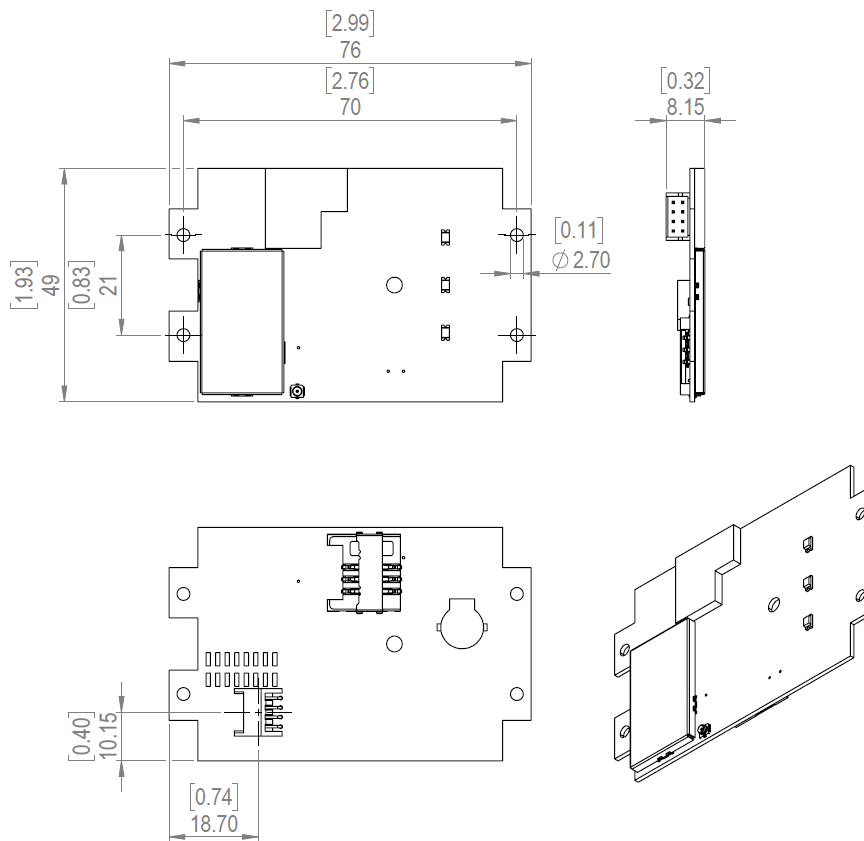

All measures in mm [inch]

### ELATEC GmbH

Zeppelinstr. 1  
82178 Puchheim  
Germany  
P +49 89 552 9961 0  
F +49 89 552 9961 129  
E-Mail: info-rfid@elatec.com  
Website: elatec.com

### ELATEC Systems GmbH

Schwieberdinger Str. 44  
71636 Ludwigsburg  
Germany  
P +49 7141 309736 0  
E-Mail: info-rfid@elatec.com  
Website: elatec.com

### ELATEC Inc.

1995 SW Martin Hwy  
Palm City • FL 34990  
USA  
P +1 772 210 2263  
F +1 772 382 3749  
E-Mail: americas-info@elatec.com  
Website: elatec.com

### ELATEC Technology (Shenzhen) LLC

918, Main Building, Tian An Cyber Times  
Tower, No. 6, Tairan Fourth Road, Tian 'an  
Community, Shatou Neighborhood  
Futian District • Shenzhen • China  
P/F +86 755 2394 6014  
E-Mail: apac-info@elatec.com  
Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.