

## Data sheet

236-736

**MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE  
1 POLE PIN SPACING 10/10.16 MM / 0.4 IN FRONT-/SIDE-ENTRY**



## Technical data

Package size 300 3\*100 pieces.

Pin spacing from	10 mm
Pin spacing up to	10.16 mm
Pin spacing from	0.394 in
Pin spacing up to	0.4 in
pole count	1
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Voltage UL	300 V
Voltage CSA	300 V
Current UL	15 A
Current CSA	15 A
Measured voltage EN	500 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	16 A
Measured voltage EN	1000 V
Measured shock voltage	6 kV
Pollution degree	2
Current intensity EN	16 A
Weight	1.234 g
Color	orange

---

**Data sheet****236-736****MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE  
1 POLE PIN SPACING 10/10.16 MM / 0.4 IN FRONT-/SIDE-ENTRY**

---

Wiring type	Front-/Side-entry
No. of connection Points	1
No. of potentials	1
Height	13 mm
Height	0.512 in
Width	10 mm
Width	0.394 in
Depth	14 mm
Depth	0.551 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

xxx-xxx/332-000

with 2 solder pins/pole and 5,5 mm long solder pins

---

**Data sheet**

236-736

**MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE  
1 POLE PIN SPACING 10/10.16 MM / 0.4 IN FRONT-/SIDE-ENTRY**

---

Approval	Voltage	Current	Approval number	Notes
BBJ	250	16	B/12/697/03	
BV	1000/500	16	11915/A0	
CCA	250	16	DK2082	
CSA	300	15	18677-10	
CSM	500	16	017956	
DEMKO	500	16	98-04355	
DNV	250	16	E6998	
GL	1000/500	16	17296-00HH	
KEMA	380	16	83.6970.01/02	
RMR	250	16	99.00007.250	
RosTesT	500	16	B09523	
SEMKO	400		9411003	
UL	300	15	E45172	

## Data sheet

236-736

### MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE 1 POLE PIN SPACING 10/10.16 MM / 0.4 IN FRONT-/SIDE-ENTRY

#### Accessories


#### Item number

END PLATE 1 MM / 0.039 IN THICK	236-600
Jumper GDS RM 5mm	Jumper PCB Spacing 5mm
Jumper GDS RM 7,5mm	Jumper PCB Spacing 7.5mm
OPERATING STICKER FOR PCB TERMINAL BLOCKS	210-191
OPERATING TOOL FITTED FOR SERIES 264, 280, 281	209-130
OPERATING TOOL PLASTICS	236-332
Profile PCB 236, 255, 256	Profile PCB 236, 255, 256
Profile PCB 257, 736, 737, 738	Profile PCB 257, 736, 737, 738
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-257
SCREWDRIVER 3.5 X 0.5 MM / 0.137 X 0.019IN	210-258
SCREWDRIVER Type 2, bar (3,5 x 0,5) mm	210-120
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 2, bar (3,5 x 0,5) mm	210-620
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10.16 MM	249-177
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10.16 MM	249-176/238-880
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10.16 MM	249-176/238-872
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10.16 MM	249-176/238-873
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10MM	249-175
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10MM	249-174/238-862
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10MM	249-174/238-863
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10MM	249-174/238-870
SELF-ADHESIVE MARKER STRIPS SUITABLE FOR TERMINAL STRIPS WITH PIN SPACING 10MM	249-174/237-108

## Data sheet

236-736

**MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE**  
**1 POLE PIN SPACING 10/10.16 MM / 0.4 IN FRONT-/SIDE-ENTRY**

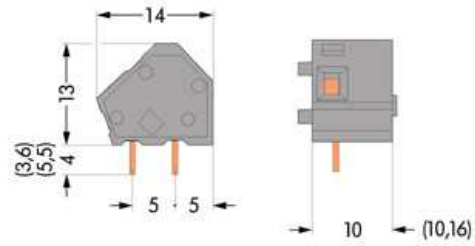

---

**Data sheet**

**236-736**

**MODULAR PCB TERMINAL BLOCK 1 SOLDER PIN / POLE  
1 POLE PIN SPACING 10/10.16 MM / 0.4 IN FRONT-/SIDE-ENTRY**

---

Diameter of drilled hole:  $1,1^{+0,1}$  mm