

## Data sheet

734-208

**FEMALE PLUG 8 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP  
CONNECTION**



## Technical data

Package size 50 pieces.

Pin spacing from	3.81 mm
Pin spacing from	0.15 in
pole count	8
Cross section from [mm <sup>2</sup> ]	0.08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	1.5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Voltage CSA	300 V
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	10 A
Weight	6.664 g
Color	orange
No. of connection Points	8
No. of potentials	8
Height	13.4 mm
Height	0.528 in
Width	32.68 mm
Width	1.287 in
Depth	18.6 mm
Depth	0.732 in
Strip length from	7 mm

---

Data sheet

734-208

**FEMALE PLUG 8 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP  
CONNECTION**

---

Strip length to	7 mm
Strip length	0.28 in

xxx-xxx/033-000	Strain relief plate 12,5 mm
-----------------	-----------------------------

---

**Data sheet**

734-208

**FEMALE PLUG 8 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP  
CONNECTION**

---

Approval	Voltage	Current	Approval number	Notes
BV	250	10	11915/A0	
CCA	250	10	123898-02	
CCA	250	10	NL5641	
CSM	250	10	17956	
DEMKO	250	10	00-00103	
DNV	250	10	E-6997	
GL	250	10	17296-00HH	
KEMA	250	10	2077592.02	
LR	250	10	96/20035	
RMR	250	10	99.00007.250	
RosTesT	250	10	B09523	

---

**Data sheet****734-208****FEMALE PLUG 8 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP  
CONNECTION**

---


**Accessories****Item number**

OPERATING STICKER FOR MULTI CONNECTION SYSTEM	210-199
SCREWDRIVER Type 1, bar (2,5 x 0,4) mm	210-119
SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm	210-619
SNAP-ON TYPE RELIEF HOUSING SUITABLE FOR PIN SPACING 3.81 MM / 0.15 IN	734-638
STRAIN RELIEF PLATE FOR SERIES 734	734-228

## Data sheet

734-208

**FEMALE PLUG 8 POLE**  
**100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP CONNECTION**

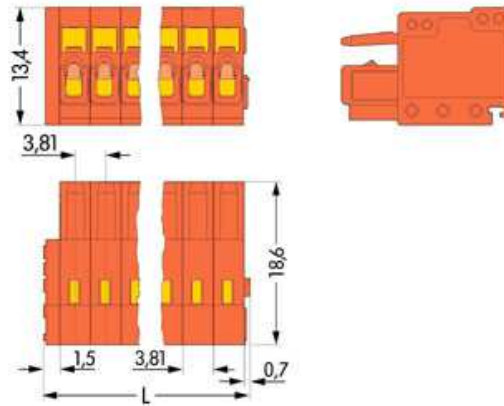

---

Data sheet

734-208

**FEMALE PLUG 8 POLE  
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP  
CONNECTION**

---

$L = (\text{No. of poles} \times \text{pin spacing}) + 2,2 \text{ mm}$