

Han 1A CA M12-D-cod. -lever m/m PVC 7.5m

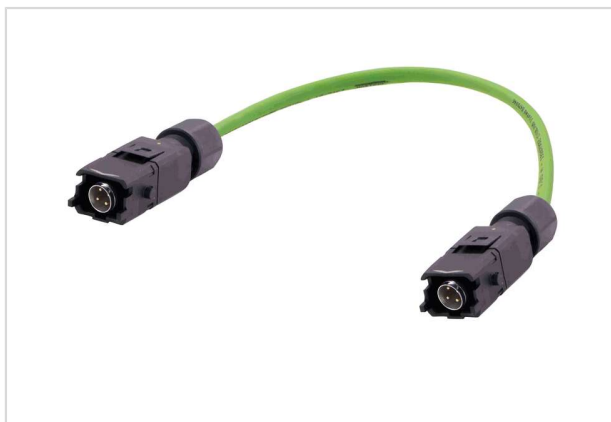


Image is for illustration purposes only. Please refer to product description.

Part number	33 50 464 6807 075
Specification	Han 1A CA M12-D-cod. -lever m/m PVC 7.5m
HARTING eCatalogue	https://harting.com/33504646807075

Identification

Category	System cabling
Series	Han® 1A
Element	Cable assemblies
Specification	Pre-assembled on both sides
Connector 1	Han® 1A
Connector 2	Han® 1A

Version

Cable length	7.5 m
Number of cores	4
Core structure	4x AWG 22/7
Coding	D-coding
Locking type	Single locking lever
Details	Not be coupled or decoupled under electrical load. Assembly and installation must be carried out by a qualified electrician.

Technical characteristics

Transmission characteristics	Cat. 5
Data rate	10 Mbit/s 100 Mbit/s
Limiting temperature	-40 ... +70 °C unmoved -20 ... +60 °C moved



Pushing Performance
 Since 1945

Material properties

Material (cable)	PVC
Colour (cable)	Green
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel

Specifications and approvals

Specifications	ISO/IEC 11801
	EN 50173-3
	UL 1685
	UL 1581

Commercial data

Packaging size	1
Country of origin	Romania
European customs tariff number	85444290
GTIN	5713140244177
eCl@ss	27060311 Assembled sensor actuator-line
ETIM	EC001855
UNSPSC 24.0	26121604