

Data sheet

734-210

FEMALE PLUG 10 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP CONNECTION



Technical data

Package size 50 pieces.

| | |
|---------------------------------------|----------------------|
| Pin spacing from | 3.81 mm |
| Pin spacing from | 0.15 in |
| pole count | 10 |
| Cross section from [mm ²] | 0.08 mm ² |
| Cross section to [mm ²] | 1.5 mm ² |
| Cross section from [AWG] | 28 AWG |
| Cross section to [AWG] | 14 AWG |
| Voltage CSA | 300 V |
| Measured voltage EN | 250 V |
| Measured shock voltage | 2.5 kV |
| Pollution degree | 2 |
| Current intensity EN | 10 A |
| Weight | 8.276 g |
| Color | orange |
| No. of connection Points | 10 |
| No. of potentials | 10 |
| Height | 13.4 mm |
| Height | 0.528 in |
| Width | 40.3 mm |
| Width | 1.587 in |
| Depth | 18.6 mm |
| Depth | 0.732 in |
| Strip length from | 7 mm |

Data sheet

734-210

**FEMALE PLUG 10 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

| | |
|-----------------|---------|
| Strip length to | 7 mm |
| Strip length | 0.28 in |

| | |
|-----------------|---------------------------|
| xxx-xxx/034-000 | Strain relief plate 25 mm |
|-----------------|---------------------------|

Data sheet

734-210

**FEMALE PLUG 10 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

| Approval | Voltage | Current | Approval number | Notes |
|----------|---------|---------|-----------------|-------|
| BV | 250 | 10 | 11915/A0 | |
| CCA | 250 | 10 | 123898-02 | |
| CCA | 250 | 10 | NL5641 | |
| CSM | 250 | 10 | 17956 | |
| DEMKO | 250 | 10 | 00-00103 | |
| DNV | 250 | 10 | E-6997 | |
| GL | 250 | 10 | 17296-00HH | |
| KEMA | 250 | 10 | 2077592.02 | |
| LR | 250 | 10 | 96/20035 | |
| RMR | 250 | 10 | 99.00007.250 | |
| RosTesT | 250 | 10 | B09523 | |

Data sheet

734-210

**FEMALE PLUG 10 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**


Accessories**Item number**

| | |
|--|---------|
| OPERATING STICKER FOR MULTI CONNECTION SYSTEM | 210-199 |
| SCREWDRIVER Type 1, bar (2,5 x 0,4) mm | 210-119 |
| SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm | 210-619 |
| SNAP-ON TYPE RELIEF HOUSING SUITABLE FOR PIN SPACING 3.81 MM / 0.15 IN | 734-640 |
| STRAIN RELIEF PLATE FOR SERIES 734 | 734-229 |

Data sheet

734-210

FEMALE PLUG 10 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP CONNECTION

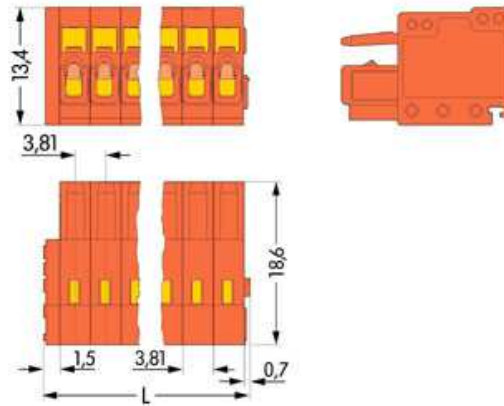

Data sheet

734-210

**FEMALE PLUG 10 POLE
100% PROTECTED AGAINST MISMATING WITH CODIG FINGERS CAGE CLAMP
CONNECTION**

$L = (\text{No. of poles} \times \text{pin spacing}) + 2,2 \text{ mm}$