
SDA





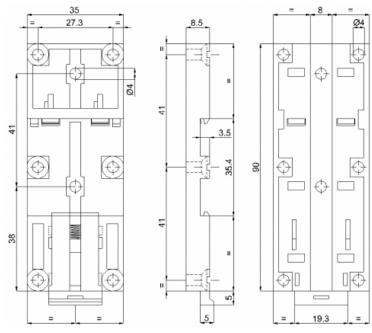

DIN rail support

OFN			AATIONI
$(\neg \vdash V)$	FRAI	ロハトいドハ	JATION

pitch: mm housing height: 0.00 mm housing depth: mm dimensional class: high

wire section: clamp opening size:

wire stripping:

operating temperature: -40°C ÷ +70°C **ELECTRICAL CHARACTERISTICS**

Α current: voltage: impulse voltage: kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



current: voltage:



MATERIALS

FILE:

PPE - UL 94 V1 housing:

n/a screw:

clamp/spring: Galvanized iron terminal: n/a

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*	
-	SDA	N/A	N/A	N/A	