


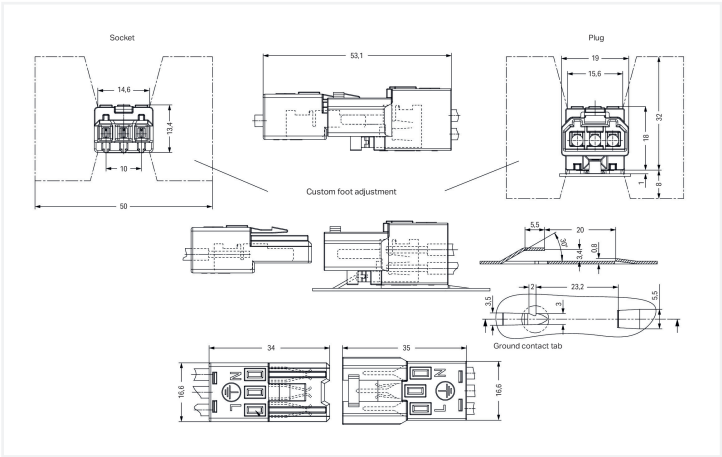

Color: white

Splicing connector, 267 Series, PUSH WIRE®

This splicing connector (item number 267-563) is designed to connect conductors quickly and easily. Strip lengths must be between 11 and 12 mm when connecting conductors to this splicing connector. This product features one conductor terminal and utilizes PUSH WIRE®. Our PUSH WIRE® connection is the quick and simple method for connecting solid conductors. The dimensions are (19 x 19 x 35) mm (width x height x depth). This splicing connector is suitable for conductor cross sections ranging from 1.5 mm² to 2.5 mm² on one side and for conductor cross sections ranging from 1.5 mm² to 2.5 mm² on the other side.

The contact surface is coated with tin.

Electrical data

Ratings per	IEC/EN 61984		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated impulse withstand voltage	-	4 kV	-
Rated current	-	16 A	-

Connection Data

Total number of potentials	3
Number of connection types	1
PE function	with ground contact

Connection 1	
Connection technology	PUSH WIRE®
Solid conductor	1.5 ... 2.5 mm²
Strip length	11 ... 12 mm / 0.43 ... 0.47 inches

Connection 2	
Solid conductor	1.5 ... 2.5 mm²



Physical data	
Width	19 mm / 0.75 inches
Height	19 mm / 0.75 inches
Depth	35 mm / 1.38 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0.125 MJ
Weight	9.1 g

Environmental requirements	
Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C
Temperature stability	105 °C

Commercial data	
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	PL
GTIN	4055143286978
Customs tariff number	85366990990

Product Classification	
UNSPSC	39121402
ETIM 9.0	EC002560
ETIM 10.0	EC002560
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	2156138.01
CCA DEKRA Certification B.V.	IEC 61984	NL-47713



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 267-563			

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	