


U.I. Lapp GmbH	PRODUCT INFORMATION	
	EPIC® H-A 10	13.01.2016

H-A inserts with screw termination up to 2.5 mm² wire cross section
Slim connector insert for standard application
Easy to service screw connection
Universal for current and voltage transmission



Industrial machinery and plant engineering



Assembly time



Space requirement



Info

Slim standard insert, easy to connect by screw
Universal for current and voltage transmission

Application range

Machine and equipment manufacturing
Control engineering

Remark


Photographs are not to scale and do not represent detailed images of the respective products.


Technical Data

Stripping length (mm):	8
Rated voltage (V):	IEC: 250 V UL: 600 V CSA: 600 V
Rated impulse voltage:	4 kV
Rated current (A):	IEC: 16 A UL: 14 A CSA: 16 A
Contact resistance:	1.5 - 4 mohm
Contacts:	Copper alloy, hard silver-plated
Number of contacts:	10 + PE
Termination methods:	Screw termination: 0.5 - 2.5 mm ² (2.5 mm ² with conductor end sleeves depending on the crimping profile)
Cycle of mechanical operation:	100
Temperature range:	-40°C to +100°C, short-term up to +125°C
VDE-tested:	Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770
Degree of soiling:	3


Product Management	Document: LAPP_PRO340EN.pdf	1 / 3
--------------------	-----------------------------	-------

Part number	Article description	Contact type	Wire protection	Number of operating contacts
H-A 10 screw termination				
10440100	H-A 10 SS	male	yes	1 - 10
10441100	H-A 10 BS	female	yes	1 - 10
10440000	H-A 10 SS	male		1 - 10
10441000	H-A 10 BS	female		1 - 10



U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	EPIC® H-A 10	13.01.2016

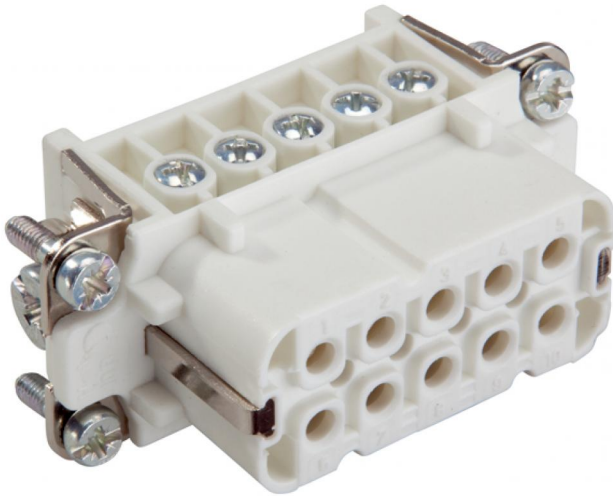

M

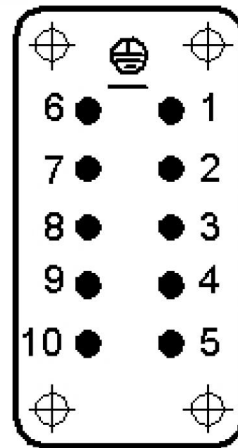

F

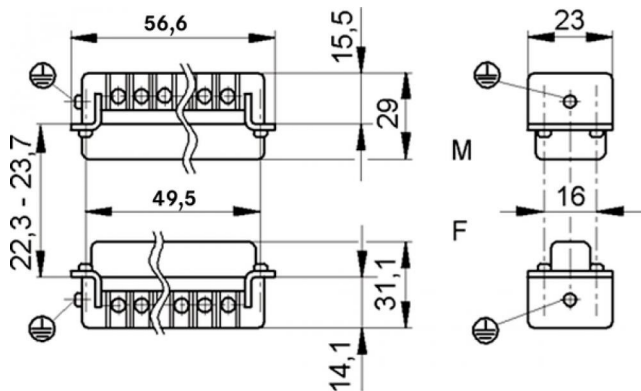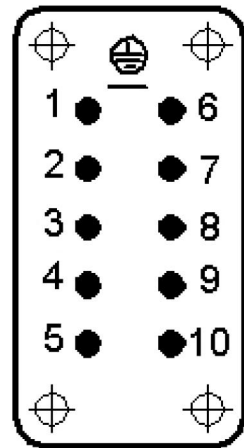

Product Management	Document: LAPP_PRO340EN.pdf	3 / 3
--------------------	-----------------------------	-------