

# Ultra-low Wifi Module

■ ■ ■ USR-C215

## Serial wifi data transmission


USR-C215 is a TTL to wifi module, used for data transparent transmission. Hardware of USR-C215 wifi module integrates MAC, baseband chip and RF transceiver unit.

The module supports WiFi protocol and TCP/IP protocol. User can realize uart device networking via simple configuration.

■ ■ ■ TTL to Wifi

- The fully integrated serial to wifi TCP/UDP transmission function, can choose multiple serial speed
- Support WPA/WPA2 security mode.
- Support work as AP, STA, AP+STA mode
- Support Wi-Fi@2.4 GHz 802.11b/g/n wireless standard
- LAN search and wireless parameter setting function
- Support TCP/UDP Client registration packet mechanism
- Support Simplelink/usrlink rapid networking configuration
- Httpd Client function
- On-board PCB antenna and external antenna optional
- Support simple AT+ command set configuration
- Support class RFC2217 automatic baud rate adaptive function
- Ultra-low power
- 3.3V power supply
- Small size: 22 x 13.5 x 6mm

Specifications	
<b>Hardware</b>	
Data Interface	UART
Operating Temp.	-20~ 85°C
Storage Temp.	-55~ 125°C
Size	22 x 13.5 x 6mm
External Interface	SIP
Operating Voltage	DC 3.0~3.6V
Operating Current	AP: 74mA (average), 285mA (peak) STA: 32mA (average), 196mA (peak)
<b>Software</b>	
Network Type	AP, STA, AP+STA
Security Mechanism	WPA-PSK/WPA2-PSK
Encryption Type	TKIP, AES, TKIP/AES
Network Protocol	IPv4, TCP/UDP
User Configuration	AT+command Webpage setting
<b>Wireless</b>	
Wireless Standard	802.11 b/g/n
Transmit Power	802.11b: +18 +/-1dBm (@11Mbps) 802.11g: +17 +/-1dBm (@54Mbps) 802.11n: +15 +/-1dBm (@HT20, MCS7)
Receive Sensitivity	802.11b: -85 dBm (@11Mbps, CCK) 802.11g: -70 dBm (@54Mbps, OFDM) 802.11n: -68 dBm (@HT20, MCS7)
Antenna	External: I-PEX connector Internal: on-board antenna

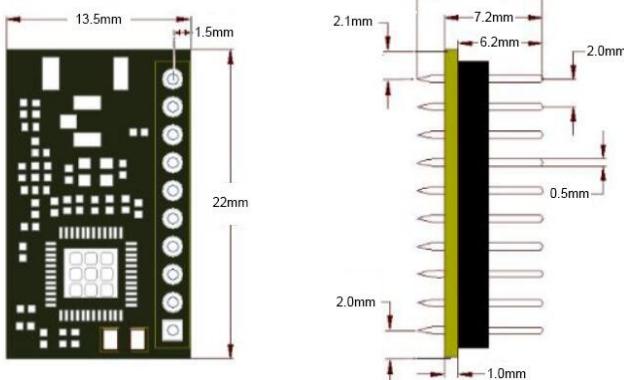

Jinan USR IOT Technology Limited

Tel: 86-531-88826739

Email: sales@usriot.com

Web: www.usriot.com

Support: h.usriot.com

