

Data sheet

739-305

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**



Technical data

Package size 240 4*60 pieces.

Pin spacing from	3.5 mm
Pin spacing from	0.138 in
pole count	5
Cross section from [mm ²]	0.08 mm ²
Cross section to [mm ²]	1.5 mm ²
Cross section from [AWG]	28 AWG
Cross section to [AWG]	14 AWG
Voltage UL	300 V
Measured voltage EN	250 V
Measured shock voltage	2.5 kV
Pollution degree	2
Current intensity EN	6 A
Current UL	6 A
Weight	3.247 g
Color	grey
Wiring type	Front-entry
No. of connection Points	5
No. of potentials	5
Height	12.3 mm
Height	0.184 in
Width	19 mm
Width	0.748 in
Depth	13.4 mm

Data sheet

739-305

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Depth	0.528 in
Strip length from	5 mm
Strip length to	6 mm
Strip length	0.22 in

Data sheet

739-305

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Approval	Voltage	Current	Approval number	Notes
DEMKO	250	6	99-04230	
DEMKO	250	6	DK99-04230	
RMR	250	6	99.00007.250	
UL	300	6	E45172	

Data sheet

739-305

**PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Accessories**Item number**

SCREWDRIVER Type 1, bar (2,5 x 0,4) mm

210-119

SCREWDRIVER WITH PARTIALLY INSULATED SHAFT Type 1, bar (2,5 x 0,4) mm

210-619


SELF-ADHESIVE MARKER STRIPS HEIGHT OF MARKER STRIP 3 MM

709-179

Data sheet

739-305

PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION

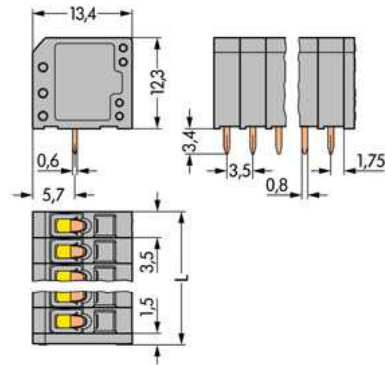

Data sheet**739-305****PCB TERMINAL STRIP 1 SOLDER PIN / POLE
PIN SPACING 3.5 MM / 0.138 IN FRONT-ENTRY CAGE CLAMP CONNECTION**

Diameter of drilled hole: $1,1^{+0,1}$ mm
L = (No.of poles x pin spacing) + 1,5 mm